


Order Number
11-03-0043
Engineering Number
HT60923A

molex

Application Tooling Specification



FEATURES

- This tool is designed to extract many terminals from various plug and receptacle housings.

SCOPE

Products: See chart below.


Terminal Series No.	Description	Housing Series No.	Terminal Order No.					
43030	Micro-Fit 3.0 Crimp Terminal 18-30 AWG	43025 43645 44133	43030-0001	43030-0002	43030-0003	43030-0004	43030-0005	43030-0006
			43030-0007	43030-0008	43030-0009	43030-0010	43030-0011	43030-0012
			43030-0024	43030-0038	43030-0039	43030-0040	43030-0051	43030-0052
			43030-0053	43030-0056	43030-0057	43030-0058	43030-0059	43030-0080
			43030-0081	43030-1001				
43031		43020 43640 44300	43031-0001	43031-0002	43031-0003	43031-0004	43031-0005	43031-0006
			43031-0007	43031-0008	43031-0009	43031-0010	43031-0011	43031-0012
			43031-0016	43031-0017	43031-0018	43031-0019	43031-0021	43031-0022
			43031-0023	43031-0051	430310052	43031-0053	43031-0057	43031-0059
			43031-0102	43031-0103	43031-0106	43031-1001	43031-1002	43031-1003
			43031-5003	43031-5004	43031-5005	43031-5006	43031-5007	43031-5008
			43031-5009	43031-5010				
44372	Micro-Fit 3.0 High Force 20-24 AWG	43025 43645 44133	44372-0002					
45773	Micro-Fit 3.0 Lubed Female 20-30 AWG	43025 43695 44133	45773-0001	45773-0002	45773-0003	45773-0004	45773-0005	45773-0006
			45773-0053					
45807	Micro-Fit Plus 3.0 18 AWG	43025 43645 44133 46623	45807-0003	45807-0038				
46235	Micro-Fit 3.0 Crimp Terminal 20-24 AWG	43025 43645 44133	46235-0001	46235-0002	46235-0003	46235-0004	46235-5001	46235-5002
			46235-5004	46235-5003				
50011	2.0mm (.079") Low-Profile Receptacle Terminal 24-34 AWG	51004 51049	50011-8000	50011-8100	39-00-0422			
50031		51004 51049	50031-8000	50031-8100				
50058	1.25mm (.049") Pitch PicoBlade 26-32 AWG	51021	50058-8000	50058-8099	50058-8100	50058-8200	50058-8300	50058-8400
			50058-8500	50058-8001	50058-8020			
50061	1.25mm (.049") Pitch Board-In-Crimp Terminal 28-32 AWG	51022	50061-8000	50061-8018	50061-8028	50061-8099	50061-8100	50061-8118
			50061-8128					
50079	1.25mm (.049") Pitch PicoBlade Crimp Terminal 26-28 AWG	51021	50079-8000	50079-8053	50079-8099	50079-8100	50079-8153	50079-8001
39-00-0413			39-00-0414	50079-8020				
50080		51022	50080-8000	50080-8100				
50125		51047	50125-8000	50125-8100				
50133	1.25mm (.049") Pitch PicoBlade 28-32 AWG	51047	50133-8000	50133-8100				
50200	2.0mm (.079") Low-Profile 22-32 AWG	51004 51049	50200-8000	50200-8100				
50212	Micro-Latch 2.00mm (.079") Pitch 24-30 AWG	5109 51065 51090	50212-8000	50212-8100	50212-8200	50212-8300	39-00-0424	

Terminal Series No.	Description	Housing Series No.	Terminal Order No.					
50372	2.00mm (.079") Pitch 22-26 AWG	5109 51065 51090	50372-8000	50372-8100				
50420	4.00mm (.157") Pitch OBD-II Wire-to-Wire	51115 51116	50420-8000	50420-8100	50420-8200			
203951	Micro-Fit High-Current Female Terminal 18 AWG	43025 43645 44133 46623	203951-0001					
206460	Micro-Fit Plus Female Terminal 16-30 AWG	206461	206460-0011 206460-0031	206460-0012 206460-0032	206460-0013 206460-0033	206460-0021 206460-0041	206460-0022 206460-0042	206460-0023 206460-0043
214093	OneBlade 1.0 WTB 28-32 AWG	214092	214093-5000	214093-5100				
220226	PCIe Gen5 12V Hi Power Female Terminal	220282	220226-0004	220226-1004				
560085	DuraClik Crimp Terminal, Female, 22-26 AWG	502351	560085-0101					

OPERATION

For 43030, 43031, 44372, 45807, 46235, and 220226 Terminal Series



1. Insert the tip of the tool on either side of the terminal until it stops. See Figure 1. Rotate tool clockwise and then counterclockwise approximately 25° to 30° in each direction, once or twice.
2. Repeat steps 1 and 2 on the opposite side of terminal.
3. Pull on the wire, and remove the terminal from the housing. See Figure 2.

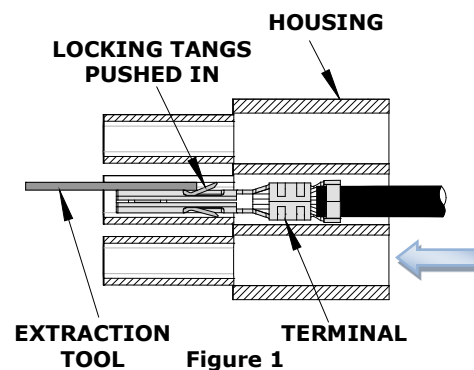

Note: When a terminal is removed in this manner, the locking tangs are damaged, and the terminal is not reusable.

For 45773, 50011, 50031, 50058, 50061, 50079, 50080, 50125, 50133, 50200, 50212, 50372, 560085, 45773, 203951 and 206460 Terminal Series

1. Hold the housing with the locking tang facing up. Bend the wire down, and insert the tip of the tool into the housing under the locking tang. See Figure 3.

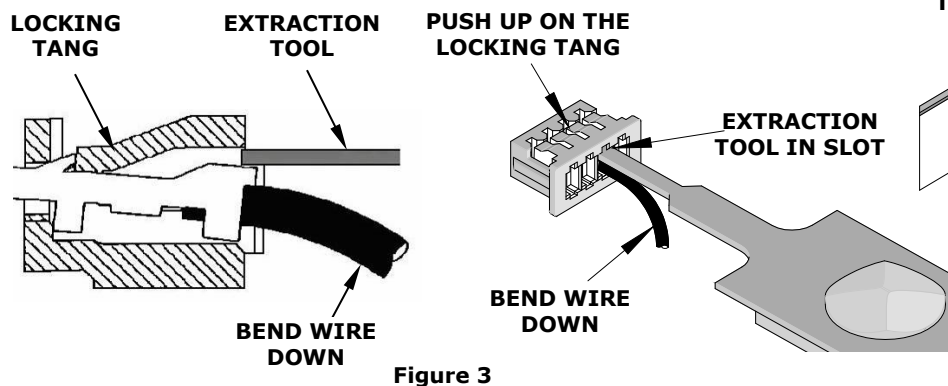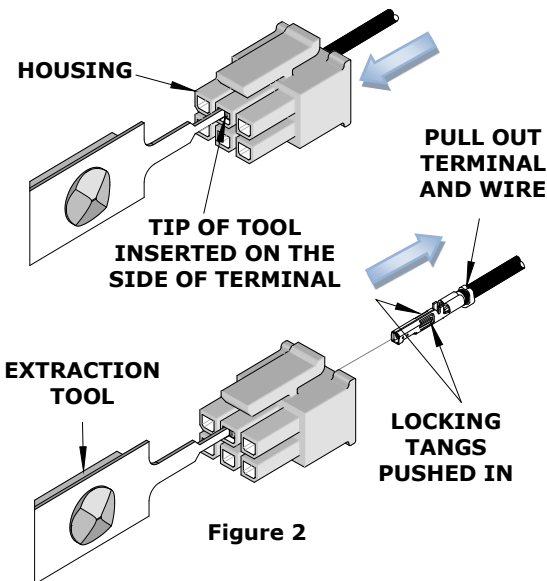

2. Hold the wire against the extraction tool, and pull out the wire and the extraction tool at the same time. See Figure 4.

Note: When reusing the housing, remember to bend back the locking tang when inserting another terminal.

For 50420 Terminal Series

1. Push the terminal forward in the direction of the arrow before using the extraction tool.
2. Insert the tip of the extraction tool on an angle above the terminal into the slot on the top of the connector housing.
3. While rotating the extraction tool down, bend the terminal locking tang down, and push the terminal back through the connector slot. Make sure that the terminated wire is pulled out at the same time. See Figure 5.

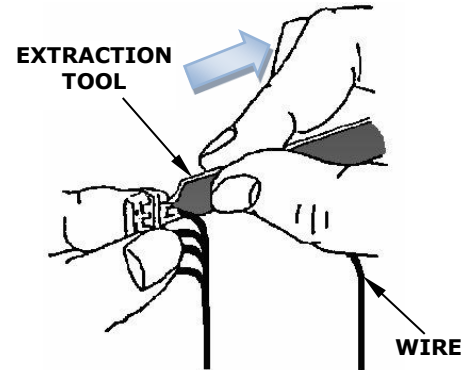


Figure 4

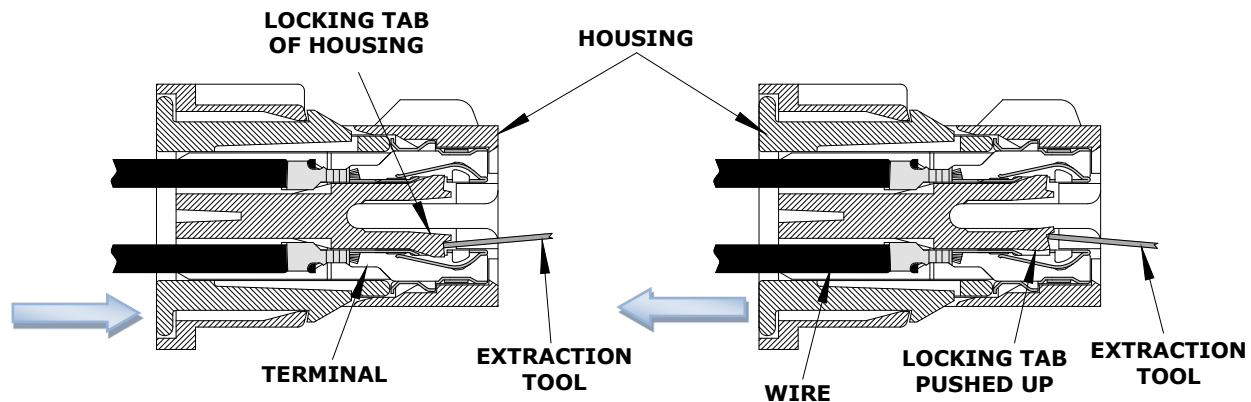


Figure 5

For 214093 Terminal Series

1. Hold the housing with the terminal locking tangs facing up. See Figure 6.
2. Insert the tip of the extraction tool into the window on the top of the connector housing that exposes the locking tang.
3. Press the tool in the direction of the arrow to depress the locking tang. See Figure 7.

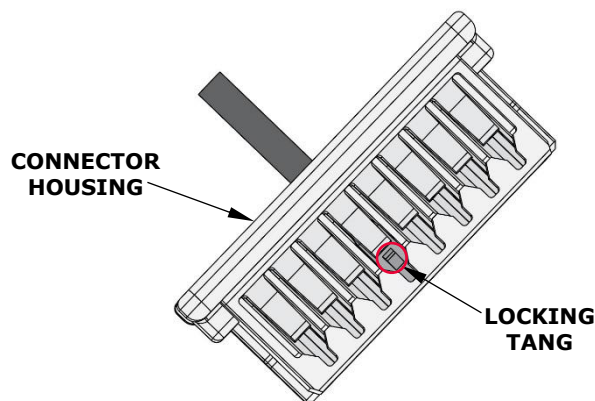


Figure 6

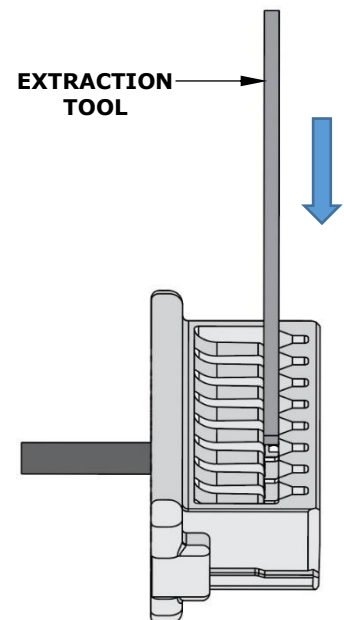


Figure 7

4. Gently pull on the wire to remove the terminal from the housing. See Figure 8. It is recommended that the terminal be replaced after extraction.

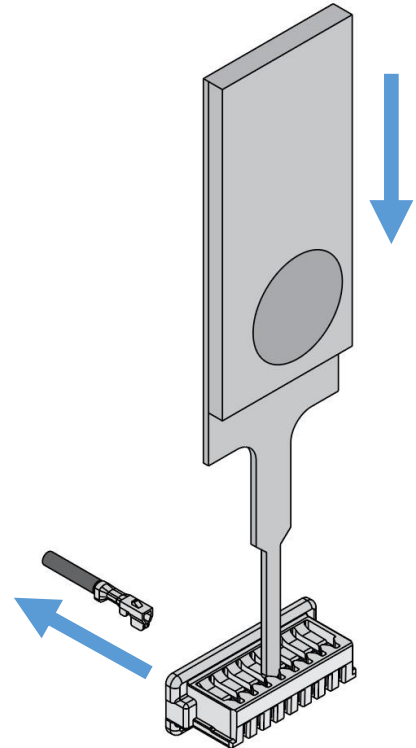


Figure 8

CAUTION: This extraction tool should be used to extract the terminal only. Using it for unintended purposes may cause injury or damage to parts. Be careful not to deform the end of the terminal.

CAUTION: Molex specifications are valid only when used with Molex terminals, applicators and tooling.

Molex does not offer repair parts for extraction tools due to the inexpensive nature of these tools.

Application Tooling Support

E-Mail: toolingsupport@molex.com

Website: www.molex.com/applicationtooling

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners.