




AC/DC CURRENT PROBE CT6841/CT6843

Clamp sensor 

Consistent, high-precision current testing
across a wide temperature range



+85°C



**GOOD DESIGN
AWARD 2014**

**Broad
temperature
range**

Operating
temperature range
-40°C to 85°C

Easy-to-use

Clamp type
No need
to cut wires

**High
accuracy**

Basic amplitude
accuracy
of $\pm 0.3\%$ rdg.



CT6841
20A AC/DC
DC to 1MHz



CT6843
200A AC/DC
DC to 500kHz



Compatible with
the Power Analyzer 3390!

-40°C

- High-accuracy measurement with a clamp-type design
- Compact form enables single-handed operation, even with tangled wiring
- Excellent heat resistance facilitates measurement inside automobile engine compartments
- Use as a replacement for legacy HIOKI models
UNIVERSAL CLAMP ON CT 9277/9278:
 - Improved accuracy (9277/9278 basic accuracy : $\pm 0.5\%$ rdg.)
 - Improved frequency characteristics (9277/9278 frequency characteristics : DC to 100kHz)



ISO 9001
JMI-0216



ISO 14001
JQA-E-90091



www.hioki.com

HIOKI company overview, new products, environmental considerations and other information are available on our website.




Operating temperature range -40°C to 85°C

Compact, high-accuracy clamp current sensor

Broad temperature range

Ideal for use in environmental testing

The CT6841 and CT6843 feature broad temperature characteristics and an operating temperature range of -40°C to 85°C, allowing them to be used in operational evaluations of devices and inside equipment that are subject to extreme temperature changes. The current sensors' tough performance helps ensure you can make the measurements you need.

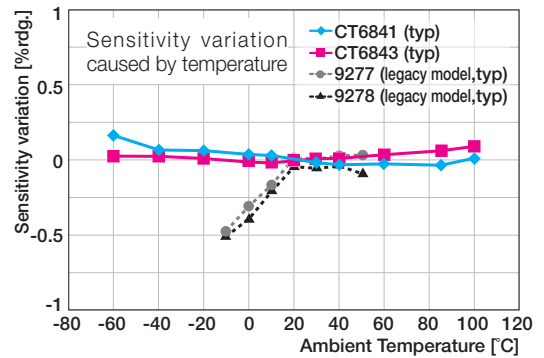

Simple operation

Single-handed operation, even in confined spaces

The CT6841/CT6843 feature a smaller sensor head and grip than previous models, making single-handed operation easy. Each sensor also features a robust locking mechanism so that external shocks won't knock it off the wire being measured.



GOOD DESIGN AWARD 2014


The CT6841 and CT6843 were highly praised for the ease at which they can be opened and closed with just one hand using the slide of the thumb over the innovative locking system.




High accuracy

Reliable track record and high accuracy of ±0.3% rdg.


Broad frequency characteristics

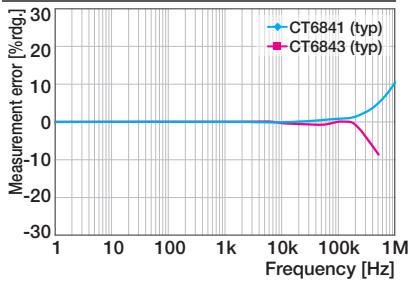

Accurate phase characteristics (required for AC power measurement)

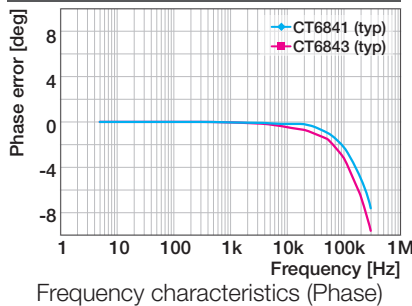

Zero-point stability made possible by flux gate technology*

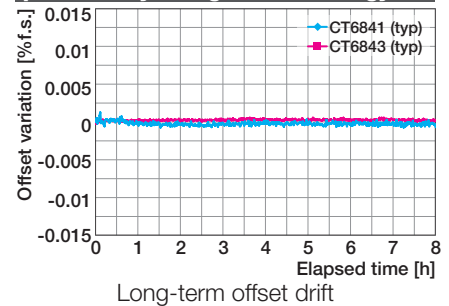


*Flux gate: An AC/DC current detection method. Compared to sensors that use the Hall element, flux gate sensors exhibit less offset drift.

Dramatic improvements


Compared to the legacy UNIVERSAL CLAMP ON CT 9277/9278, the CT6841/CT6843 deliver dramatically improved characteristics.




Reduced effect of the position of the conductor in the clamp

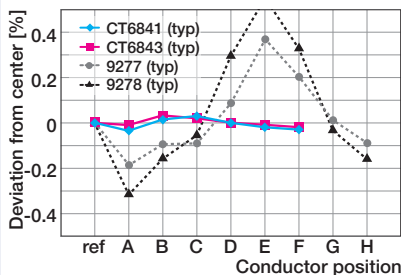


Effect of conductor position (55 Hz AC current input, 5 mm wire)

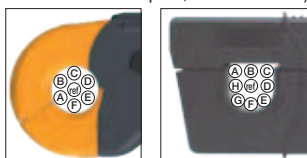


Reduced effect of noise from nearby wires

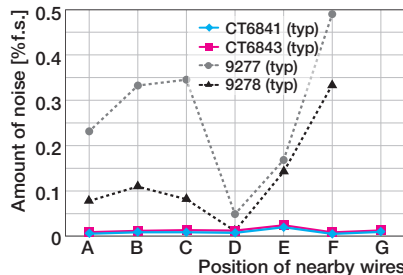

Effect of nearby conductors (Checking with 55 Hz AC current)

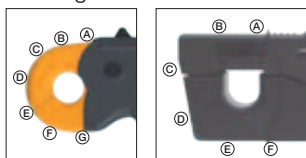

Minimized effect of magnetization caused by DC measurement error

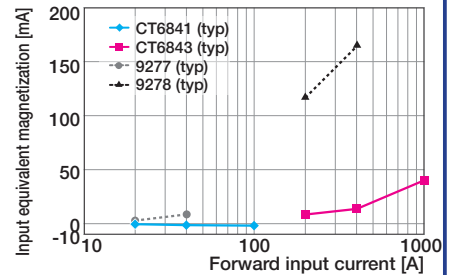


Effect of magnetization (Checking offset after current input)

9277 / 9278 representative characteristics
 Rated primary current : 20A (9277) / 200A(9278)
 Frequency characteristics : DC to 100kHz
 Operating temperature range : 0°C to 40°C

Applications


1 Measuring the charge and discharge efficiency of EV/HEV batteries

In some cases, it is not possible to use high-accuracy pass-through sensors to evaluate EVs and HEVs since their wiring cannot be easily disconnected. The CT6841/CT6843's clamp-type design simplifies high-accuracy measurement. The resin casing of the clamp is more resistant to deformation from heat than that used in legacy products, allowing you to take measurements inside engine compartments without issue.

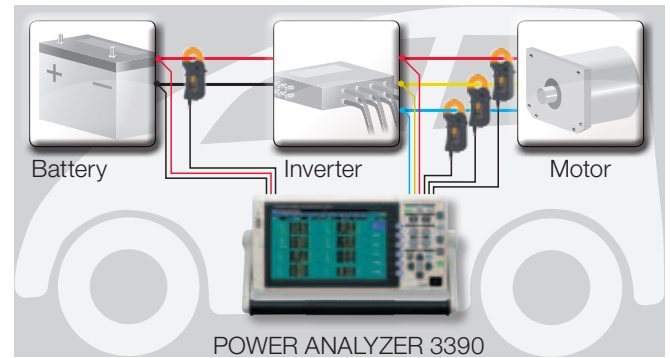

2 Evaluating inverter and power conditioner efficiency

A current sensor's amplitude accuracy and phase accuracy are both important considerations when you need to accurately measure AC power. Phase accuracy has a particularly large effect on power values when the power factor is low. The CT6841/CT6843 help ensure accurate power measurement by delivering high phase accuracy.

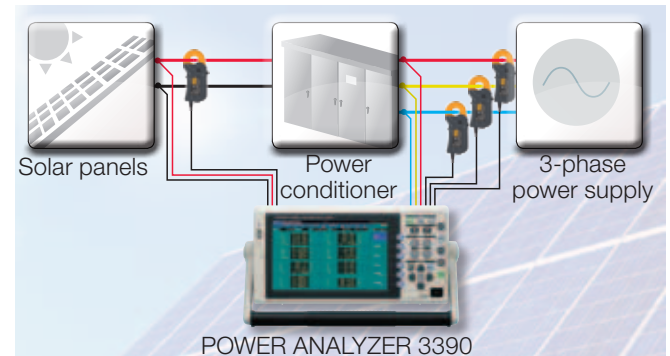

3 Evaluating fuel cells, contactless power supply circuitry, and other next generation devices


Offset drift* is characterized by minute variations, but those changes can add up over time, resulting in large errors during long-term measurement. The CT6841/CT6843 are designed to minimize offset drift, allowing them to be used in long-term evaluation of fuel cells. Thanks to their broad frequency characteristics, the sensors can also measure DC ripple current. Additionally, the current sensors can be used to measure power transmission efficiency in contactless power supply circuitry thanks to their DC to 1 MHz frequency band.

*Offset drift: A phenomenon that occurs when measuring DC current with a clamp-type current sensor. The zero point gradually shifts relative to its position at the start of measurement due to variations in the temperature of the sensor's internal circuitry.




Connecting the CT6841/CT6843 to supported measuring instruments


When connecting to the POWER ANALYZER 3390

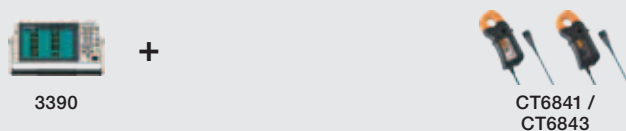


When connecting to the POWER HiTESTER 3193-10

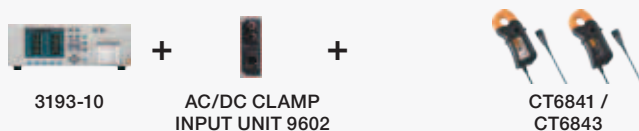


When connecting to the POWER METER PW3337/PW3336 series

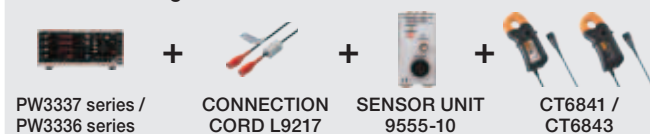


When connecting to the AC/DC POWER HiTESTER 3334-10

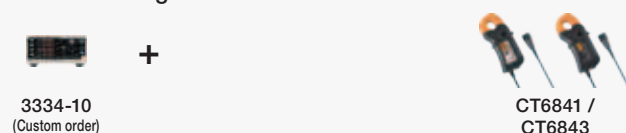


When connecting to the MEMORY HiCORDER MR8847 series

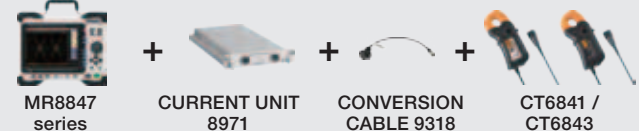

When connecting to the MEMORY HiCORDER 8860-50/ 8861-50

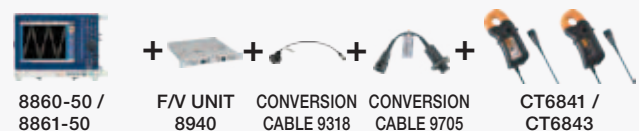

When connecting to a measuring instrument such as an oscilloscope or MEMORY HiCORDER (via a BNC terminal)

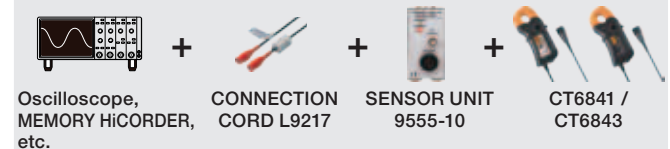

Specifications

Product warranty period : 1 year

	CT6841	CT6843
Rated primary current	20A AC/DC	200A AC/DC
Maximum input current *	40A rms (57A peak)	400A rms (570A peak)
Frequency characteristics *	DC to 1MHz	DC to 500kHz
Measurable conductor diameter	φ20 mm (0.79") or less	
Output voltage	0.1V/A	0.01V/A
Basic accuracy (DC < f ≤ 100Hz)	Amplitude accuracy : ±0.3% rdg.±0.01% f.s., Phase accuracy : ±0.1 deg	
Basic accuracy (DC)**	Amplitude accuracy : ±0.3% rdg.±0.05% f.s.	Amplitude accuracy : ±0.3% rdg.±0.02% f.s.
Offset adjustment	In DC measurement, adjust offset with a dial	
Temperature and humidity range of guaranteed accuracy	0 to 40°C (32 to 104°F), 80%RH or less	
Temperature coefficient	-40°C to 0°C and 40°C to 85°C (-40 to 32°F and 104 to 185°F) Amplitude sensitivity : ±0.01%rdg./° or less, Offset voltage : ±0.005%f.s./°C or less	
Operating temperature and humidity Storage temperature and humidity	-40 to 85°C (-40 to 185°F), 80% rh or less (non-condensation)	
Derating		
Effect of conductor position	±0.1%rdg. or less	
Effect of external electromagnetic field	50mA or less (Scaled value, in a DC or 60Hz magnetic field of 400 A/m)	
Magnetic susceptibility	10mA or less (Scaled value, after 20A DC input)	30mA or less (Scaled value, after 200A DC input)
Effect of common-mode voltage	0.05%f.s. or less (1000V rms, DC to 100Hz)	
Power supply voltage	±11 to ±15 V	
Power consumption	5VA or less	6VA or less
Dimensions	Approx. 153W × 67H × 25D mm (Approx. 6.02"W × 2.64"H × 0.98"D)	
Mass	Approx. 350 g (12.3oz),	370 g (13.1oz)
Accessories	Instruction manual, Mark band (6), Carrying Case	

*Based on the derating characteristics graph **DC accuracy depends on level of offset adjustment

Lineup and options

CURRENT PROBE



AC/DC CURRENT PROBE
CT6841 (20A)



AC/DC CURRENT PROBE
CT6843 (200A)

POWER SUPPLY



SENSOR UNIT
9555-10

Standalone AC/DC current probe use requires a separate power supply.



CONNECTION CORD
L9217

Insulated BNC to insulated BNC, 1.5 m

CABLE



EXTENSION CABLE
9706

For extending the cable length, 5 m



CONVERSION CABLE
9318

Use when connecting to the F/V Unit 8940 or Current Unit 8971



CONVERSION CABLE
9705

Use when connecting to the F/V Unit 8940

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.:

TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

DISTRIBUTED BY

HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.:

TEL +82-42-936-1281 FAX +82-42-936-1284
E-mail: info-kr@hioki.co.jp