




www.jbctools.com

INSTRUCTION MANUAL

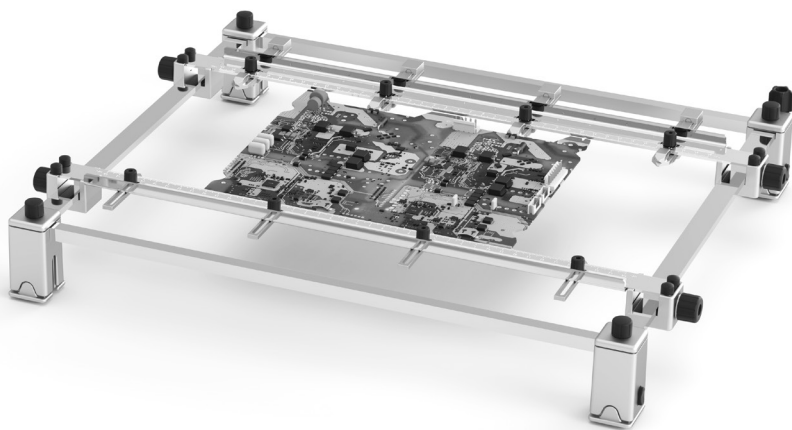

PSB


Large PCB Support

This manual corresponds to the following reference:

PHB-SA

Packing List

The following items are included:

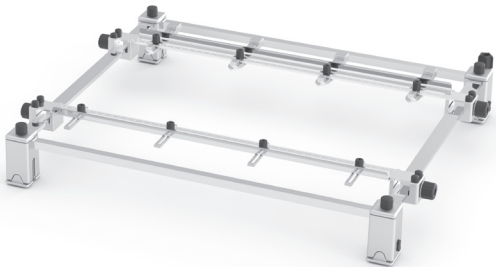

Large PCB Support 1 unit




Allen key 1 unit
Ref. 0013754



Manual 1 unit
Ref. 0026995

Features

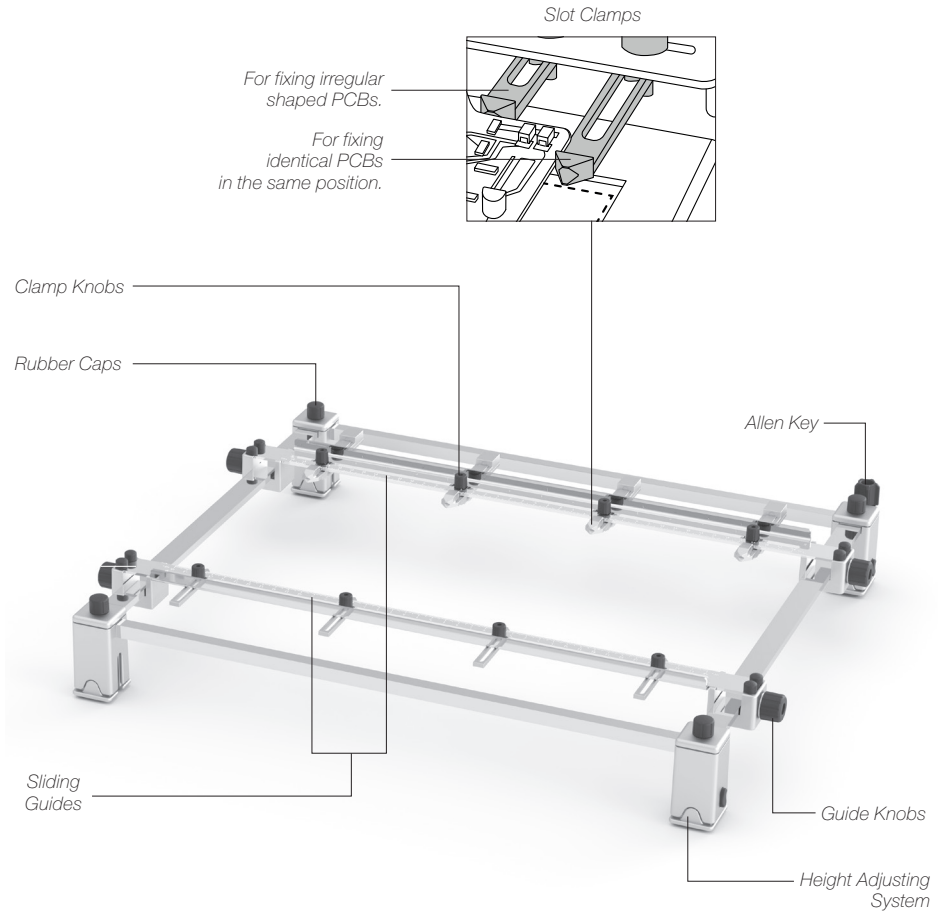


Height Adjustment

The Large PCB Support allows adjustment for **3 heights** between the PCB and the Heating Area of the Preheater Unit.


Low level

28 mm

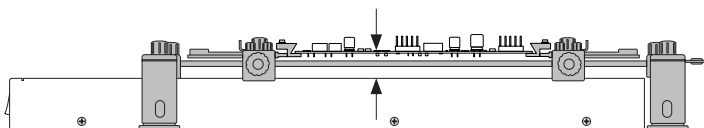


Medium level

38 mm

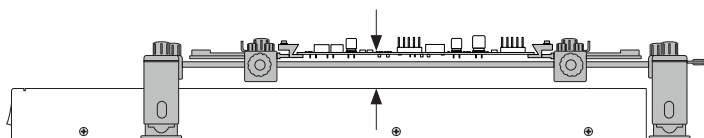


High level


48 mm

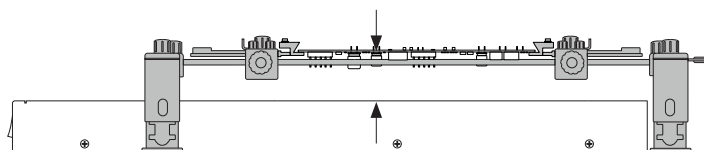

To change the height, do as follows:

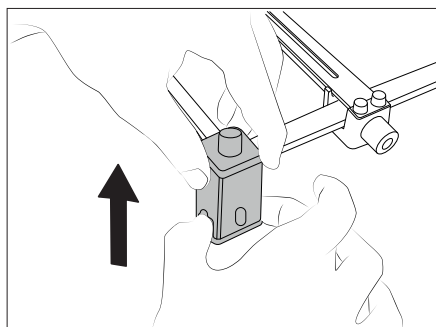

To raise the support, hold the base and pull up.

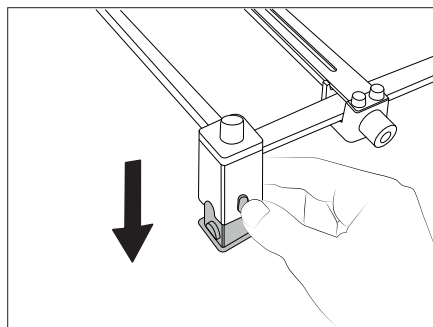


To lower the support, press the button and push down.

Fast PCB Replacement

The Large PCB Support lets you replace PCBs of the same batch fast and easily. Use the sliding guides to change the PCBs.


Removing the PCB

Loosen one sliding guide, pull back and lift out the PCB.

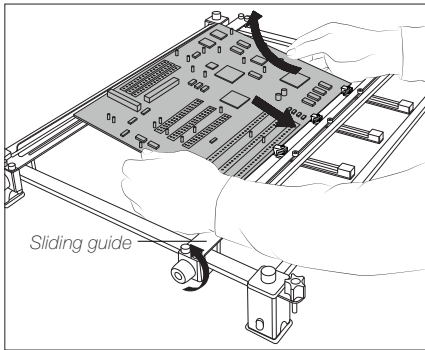


Placing another PCB

Position it and tighten the sliding guide knobs.

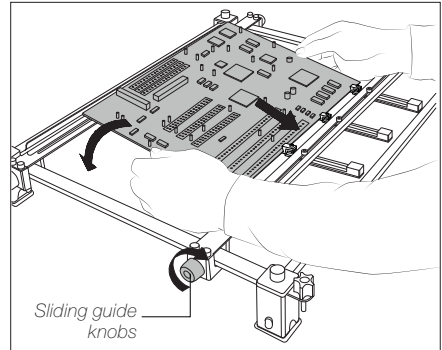


Adjustable slot clamps
for PCB fixation.




Reworking large PCBs


Use the 4 rubber caps to place PCBs larger than the support or thicker than 3mm.



1. Remove both guides by untightening the 8 screws.



2. Place the PCB on the 4 rubber caps.



3. The PCB is ready to work.

Maintenance

Before carrying out maintenance or storage, always allow the support to cool down.

- Check periodically that the Support is clean, especially the axes of the sliding guide.
- Use a damp cloth when cleaning. Alcohol can only be used to clean the metal parts
- Replace any defective or damaged piece. Use original JBC spare parts only.
- Repairs should only be performed by a JBC authorized technical service.



Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- The temperature of accessible surfaces may remain high after the unit is turned off. Handle with care.
- Be careful with the remains of liquid tin. In contact with skin, it can cause burns.
- Avoid flux coming into contact with skin or eyes to prevent irritation.
- Be careful with the smoke produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- This appliance can be used by children over the age of eight as well as persons with reduced physical, sensory or mental capabilities or lacking experience provided that they have been given adequate supervision or instruction concerning use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

Specifications

PSB

Large PCB Support

Ref. **PHB-SA**

- | | |
|--------------------------------------|----------------------------------|
| - Total Net Weight: | 2.8 kg / 6.2 lb |
| - Dimensions (Low Position): | 432 x 514 x 78 mm |
| (L x W x H) | 17 x 20.2 x 3.1 in |
| - Dimensions (High Position): | 432 x 514 x 98 mm |
| (L x W x H) | 17 x 20.2 x 3.9 in |
| - Maximum PCB thickness: | 6 mm / 0.236 in |
|
 | |
| - Total Package Dimensions / Weight: | 595 x 520 x 180 mm / 5.01kg |
| (L x W x H) | 23.2 x 20.5 x 7.09 in / 11.05 lb |

Complies with CE standards.
ESD safe.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.

