

# 8722C/D/E Coaxial Transfer Switches

DC to 26.5/40/50 GHz



# Description


Innovative design and careful process control mean the 87222C/D/E meet the requirements for highly repeatable switching elements in test instruments and switching interfaces. These switches offer exceptional insertion loss repeatability, reducing sources of random errors in the measurement path and improving measurement uncertainty.

Switch life is a critical consideration in production test systems, satellite and antenna monitoring systems, and test instrumentation. The longevity of these switches increases system uptime and lowers the cost of ownership by reducing calibration cycles and switch maintenance.


Operating from DC to 50 GHz, these switches exhibit exceptional isolation performance required to maintain measurement integrity. Isolation between ports is typically > 100 dB to 12 GHz, > 90 dB to 26.5 GHz, and > 60 dB to 50 GHz, reducing the influence of signals from other channels and system measurement uncertainties. Hence, the 87222C/D/E are ideal elements in large, multitiered switching systems.

The Keysight 87222C/D/E are designed to fall within most popular industry footprints. The 1¼ inch square flange provides tapped mounting holes, while the rest of the 2¾ inch long by 1¼ inch square body will easily fit into most systems. The standard 10-pin ribbon drive cable or optional solder terminal connections accommodate the need for secure and efficient control cable attachment.

Opto-electronic interrupts and indicators improve reliability and extend the life of the switch by eliminating DC circuit contact failures characteristic of conventional electromechanical switches. The 87222C/D/E have circuits that interrupt the current to all the solenoids once switching is complete and offer independent indicators that are controlled by optical interrupts. These indicators provide a closed path between the indicator common pin and the corresponding sense pin of the selected path.

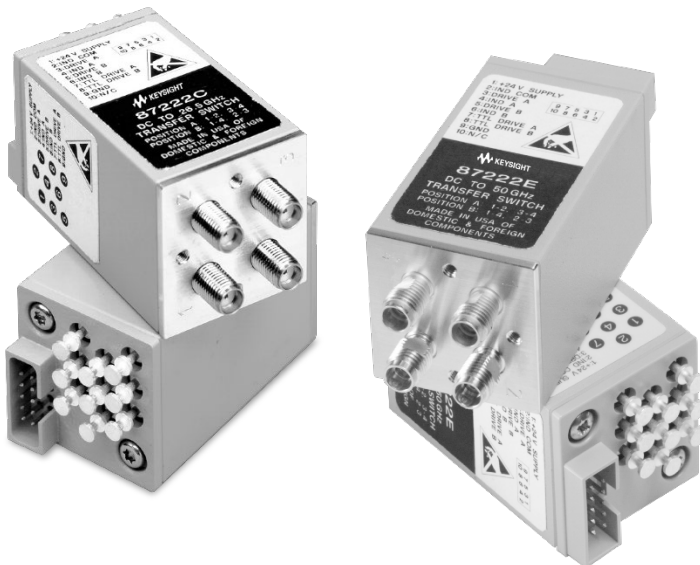

Microwave test accessories

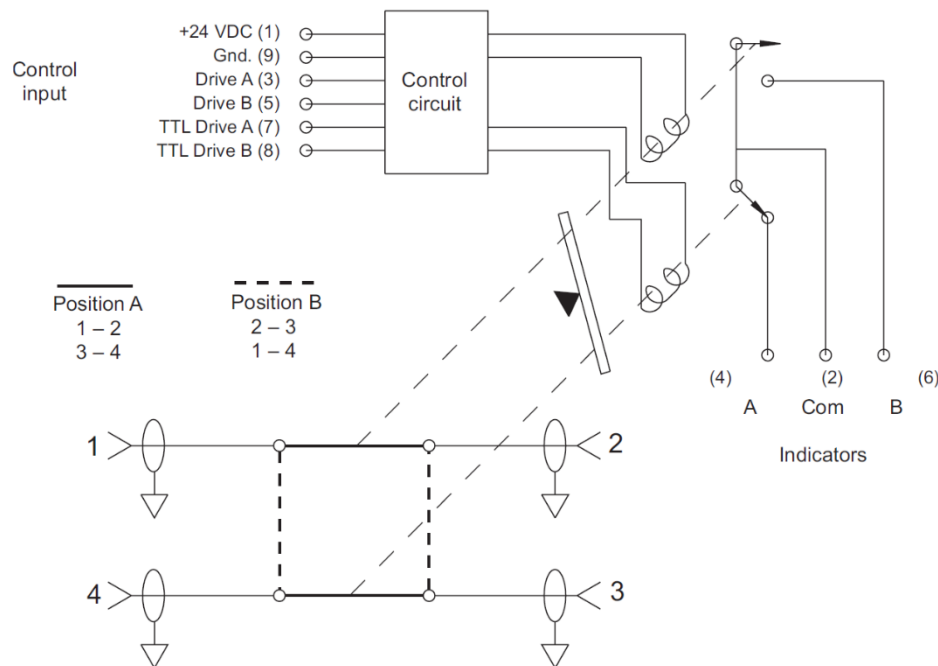

**Figure 1.** Keysight 87222C/D/E schematic

## High Performance Transfer Switches for Microwave and RF Instrumentation and Systems

- Excellent isolation, typically > 90 dB at 26.5 GHz; > 60 dB at 40, 50 GHz
- Opto-electronic indicators and interrupts
- Magnetic latching
- TTL/5V CMOS compatible

Flexibility is essential in signal routing applications, and the Keysight Technologies, Inc. 87222C/D/E 4-port coaxial transfer switches offer just that. They provide exceptional repeatability, low insertion loss, and high isolation. These switches provide simplification of design in signal routing and conditioning applications.

The 87222C/D/E can be used in a variety of applications, such as a drop-out switch, switching two inputs and two outputs, or signal reversal switching.

# Applications


The Keysight 87222C/D/E transfer switches can be used in many different applications to increase system flexibility and simplify system design. The following are five examples: switch between two inputs and two outputs, use as a drop-out switch, use for signal reversal, configure as a SPDT switch, and bypass an active device.

The 87222C/D/E transfer switches have the ability to exchange two signals between two inputs and two outputs. Either transfer switch can connect two different instruments with two devices under test (DUT). Once switched, the signals are exchanged between the two instruments and the two DUTs. The exchanged signals allow complete network and spectrum analysis on two devices with a single switch and one test setup. See Figure 2 for an example of this application.


The 87222C/D/E can be used as a simple drop-out switch where a signal is either run through the device under test or straight through the switch, bypassing the device. See Figure 3.

In the signal reverse configuration, a device can be connected across two diagonal ports of the 87222C/D/E transfer switch. This will allow the signal direction through the device to be reversed. See Figure 4.


By attaching an external termination, the designer can use the 87222C/D/E in a SPDT terminated switch configuration. See Figure 5.

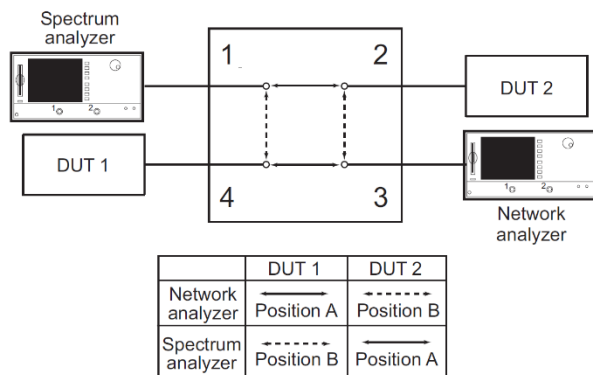


**Figure 2.** Switching two instruments and two DUTs

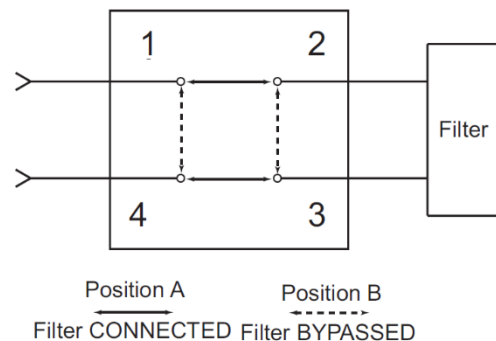

**Figure 3.** Drop-out switch

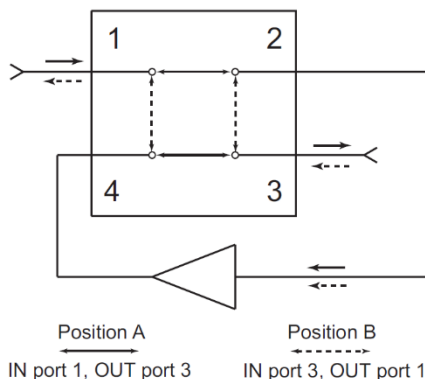


**Figure 4.** Signal reversal

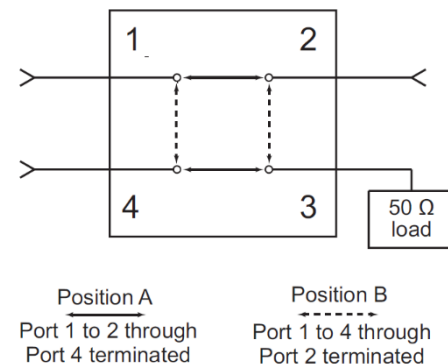

**Figure 5.** SPDT terminated

In Figure 6, an active device, such as an amplifier, is inserted into a signal path presenting a unique problem. A single transfer switch has the undesirable characteristic of shunting the output of the amplifier to its input when the signal is bypassing the amplifier. The advantage of using two transfer switches is that an additional signal path is available, however two SPDT switches can also be used. This additional path can utilize the same amplifier when the original path is bypassed.

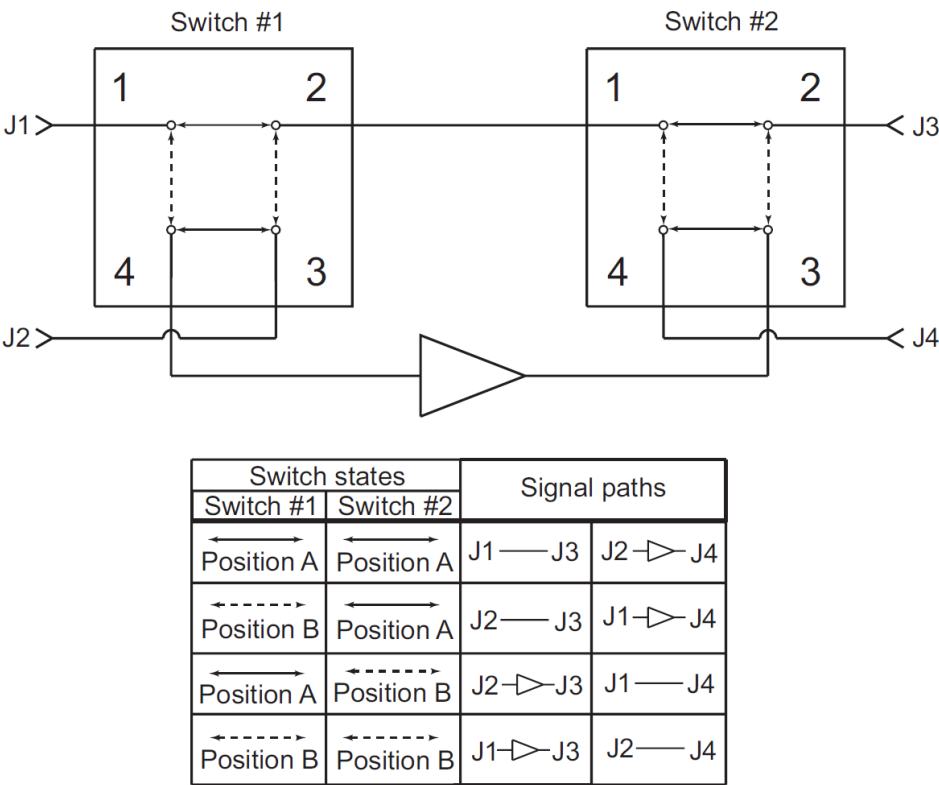

**Figure 6.** Bypassing an active device

## Driving the Switch

There are two positions for the 87222C/D/E transfer switches. See Table A. Position A has RF Port 1 connected to RF Port 2 and RF Port 3 connected to RF Port 4. Position B has RF Port 2 connected to RF Port 3 and RF Port 1 connected to RF Port 4. Either switch can be driven with a standard grounding drive control with or without a separate ground. Single line or Dual line TTL control are also available. The switch operates in a break-before-make mode. See Figure 7.

## (I) Standard drive

See Figure 8 for drive connection diagrams.

- Connect pin 1 to supply (+20 VDC to +32 VDC).
- Connect pin 9 to ground <sup>1</sup>.
- Select position A by applying ground to pin 3 <sup>2</sup>.
- Select position B by applying ground to pin 5 <sup>2</sup>.

## (II) Single line TTL drive

See Figure 8 for drive connection diagrams. See Figure 9 for TTL voltage states.

- Connect pin 1 to supply (+20 VDC to +32 VDC).
- Connect pin 9 to ground <sup>3, 4</sup>.
- Connect pin 8 to TTL “High.”
- Select position A by applying TTL “High” to pin 7 <sup>2</sup>.
- Select position B by applying TTL “Low” to pin 7 <sup>2</sup>.

## (III) Dual line TTL drive

See Figure 8 for drive connection diagrams. See Figure 9 for TTL voltage states.

- Connect pin 1 to supply (+20 VDC to +32 VDC).
- Connect pin 9 to ground <sup>3, 4</sup>.
- Select position A by applying TTL “High” to pin 7 and TTL “Low” to pin 8 <sup>2</sup>.
- Select position B by applying TTL “Low” to pin 7 and TTL “High” to pin 8 <sup>2</sup>.

**CAUTION FOR USERS OF THE Keysight 11713B/C SWITCH DRIVER: Do not drive the 87222C/D/E using the S9 or SO outputs from either the banana plugs or from pins 3 or 4 within the Atten X and Atten Y Viking sockets located on the rear panel of the 11713B/C.**

---

<sup>1</sup> Pin 9 does not need to be grounded for the switch to operate in standard drive mode. If pin 9 is not grounded, the position indicators will only function while the appropriate drive has ground applied. Therefore, if a pulse drive is used and continuous indicator operation is required, pin 9 must be grounded.

<sup>2</sup> After the RF path is switched and latched, the drive current is interrupted by the electronic position-sensing circuitry. Pulsed control is not necessary, but if implemented, the pulse width must be 15 ms minimum to ensure that the switch is fully latched.

<sup>3</sup> For TTL drive, pin 9 must be grounded.

<sup>4</sup> In addition to the quiescent current supplying the electronic position-sensing circuitry, the drive current flows out of pin 9 (during switching) when using TTL drive.

Table 1. Drive control alternatives

RF path	(I) Standard drive voltage		(II) Single line TTL/5V CMOS drive voltage		(III) Dual line TTL/5V CMOS drive voltage	
	Drive A	Drive B	TTL Drive A	TTL Drive B	TTL Drive A	TTL Drive B
	Pin 3	Pin 5	Pin 7	Pin 8	Pin 7	Pin 8
Position A 1 to 2, 3 to 4	Ground	Open	High	High	High	Low
Position B 2 to 3, 1 to 4	Open	Ground	Low	High	Low	High

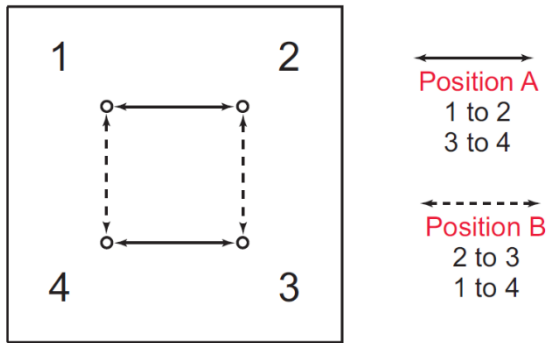


Figure 7. RF port connections

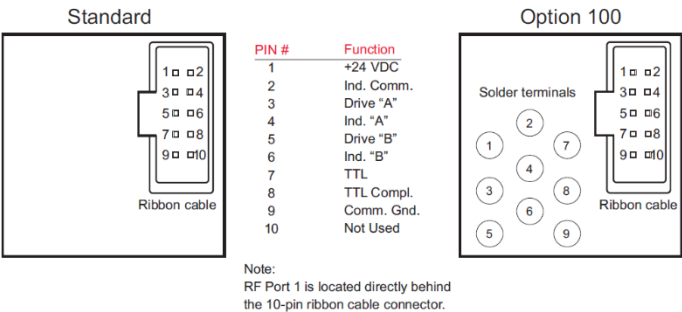


Figure 8. Drive connections

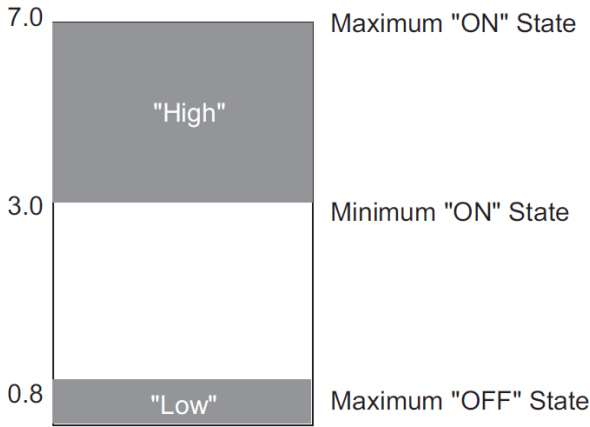


Figure 9. TTL control voltage states

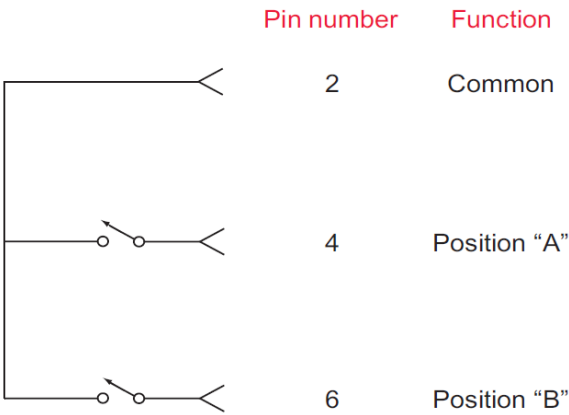


Figure 10. Indicator function diagram

# Electronic Position Indicators

The independent electronic position indicators consist of optically isolated, solid-state relays, which are driven by photo-electric sensors coupled to the mechanical position of the RF path's moving elements. See Figure 10. The circuitry consists of a common which can be connected to an output corresponding to either position A or position B. The solid state relays are configured for AC and/or DC operation. (See indicator specifications.) The electronic position indicators require that the supply (+20 VDC to +32 VDC) be connected to pin 1 but requires that pin 9 be grounded if pulse drive is used and continuous indicators operation is desired. If pin 9 is not grounded, the position indicators will function while the appropriate drive has ground applied.

## Specifications

Specifications describe the instrument's warranted performance. Supplemental and typical characteristics are intended to provide information useful in applying the instrument by giving typical, but not warranted performance parameters.

**Table 2.** Standard switch drive specifications

Parameter	Conditions	Min	Nom	Max	Units
Supply voltage		20	24	32	V
Supply current, I <sub>cc</sub>	Switching: Pulse width > 15 ms: V <sub>cc</sub> = 24 VDC		200		mA
Supply current (quiescent)		25		50	mA

**Table 3.** TTL Specific drive specifications

Parameter	Conditions	Min	Nom	Max	Units
High level input		3		7	V
Low level input				0.8	V
Max level input current	V <sub>cc</sub> = Max V input = 3.85 VDC		1	1.4	mA



# General Operating Data

Nominal/Impedance	50 $\Omega$
<b>Maximum power rating</b>	
Hot switching	1 W CW 0 W peak, 10 $\mu$ s max pulse width, not to exceed 1 W average
Life (measured at 25 °C)	5,000,000 cycles (typical)
Switching speed	15 ms maximum

# Indicator Specifications

Maximum withstand voltage	60 V
Maximum current capacity	100 mA
Maximum “ON” resistance	50 $\Omega$
Minimum “OFF” resistance	1 G $\Omega$

# Environmental Specifications

Operating temperature	–25 to 75 °C
Storage temperature	–55 to 85 °C
Temperature cycling	–55 to 85 °C, 10 cycles per MIL-STD-202F, Method 107D, Condition A (modified)
<b>Vibration</b>	
Operating	7 g, 5 to 2000 Hz at 0.25 inches pk-pk
Survival	20 g, 20 to 2000 Hz at 0.06 inches pk-pk,
Random	4 min/cycle, 4 cycles/axis
<b>Shock</b>	
Half-sine	500 g at 0.5 ms, 3 drops/direction, 18 total
Operating	50 g at 6 ms, 6 directions
Moisture resistance	65 °C, 95% RH, 10 days per MIL-STD-202F,
Altitude storage	Method 106E
RFI	50,000 feet (15,240 meters per MIL-STD-202F, Method 105C, Condition B)

## Keysight 87222C

Frequency range	DC to 26.5 GHz
Insertion loss	0.2 dB + 0.025 x frequency (GHz)
Isolation	120 dB–2.0 x frequency (GHz)
SWR	1.1 maximum DC to 2 GHz
	1.15 maximum 2 to 4 GHz
	1.25 maximum 4 to 12.4 GHz
	1.4 maximum 12.4 to 20 GHz
	1.65 maximum 20 to 26.5 GHz
Insertion loss repeatability	0.03 dB typical (measured at 25 °C)
Connectors	SMA (f)

## Keysight 87222D


Frequency range	DC to 40 GHz
Insertion loss	0.2 dB + 0.025 x frequency (GHz)
Isolation	120 dB–2.0 x frequency (GHz)
SWR	26.5–40 60 dB
	1.3 maximum DC to 12.4 GHz
	1.4 maximum DC to 12.4 to 25 GHz
	1.7 maximum DC to 25 to 40 GHz
	0.03 dB typical (measured at 25 °C)
Insertion loss repeatability	0.03 dB typical (measured at 25 °C)
Connectors	2.92 mm (f)

## Keysight 87222E


Frequency range	DC to 50 GHz
Insertion loss	0.15 dB + 0.020 x frequency (GHz)
Isolation	DC–26.5 120 dB–2.0 x frequency (GHz)
SWR	26.5–50 60 dB
	1.3 maximum DC to 12.4 GHz
	1.4 maximum 12.4 to 20 GHz
	1.5 maximum 20 to 30 GHz
	1.6 maximum 30 to 40 GHz
	1.7 maximum 40 to 50 GHz
Insertion loss repeatability	DC–40 GHz: 0.03 dB typical (measured at 25 °C)
	40–50 GHz: 0.05 dB typical (measured at 25 °C)
Connectors	2.4 mm (f)

# Keysight 87222C/D/E physical specifications


Dimensions	Per Figure 13
Weight	100 gm (0.23 lb)

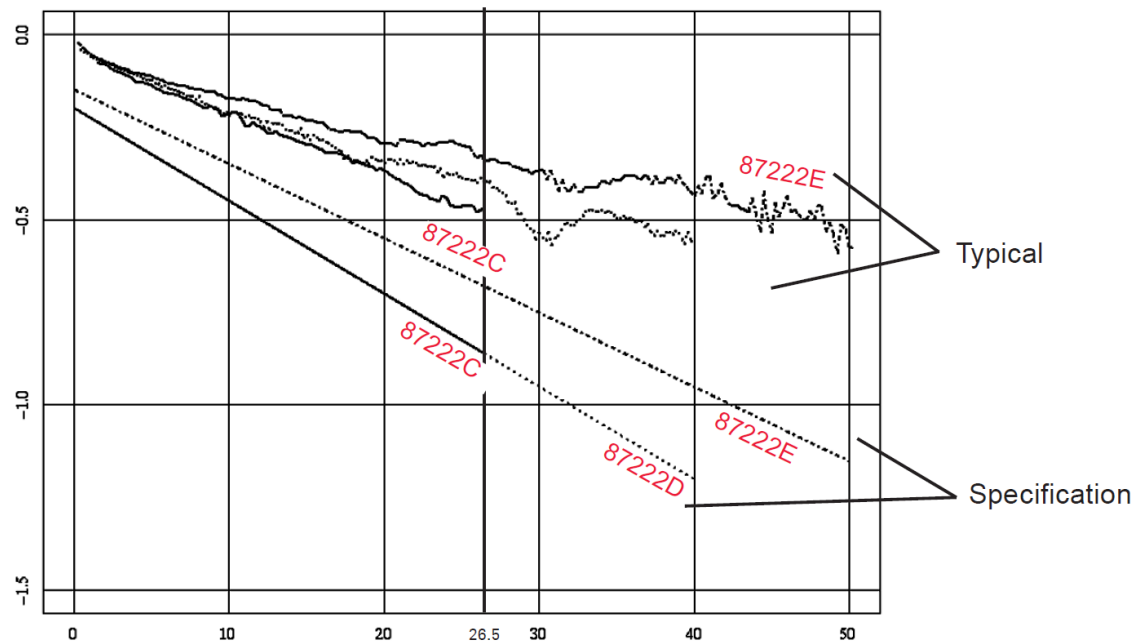

**Figure 11.** Keysight 87222C/D/E insertion loss versus frequency

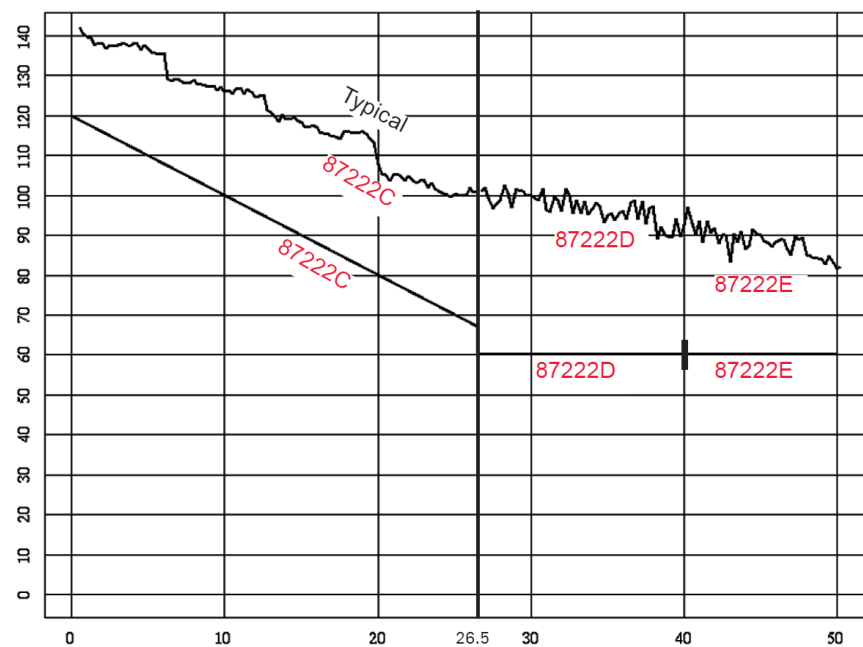

**Figure 12.** Keysight 87222C/D/E isolation versus frequency

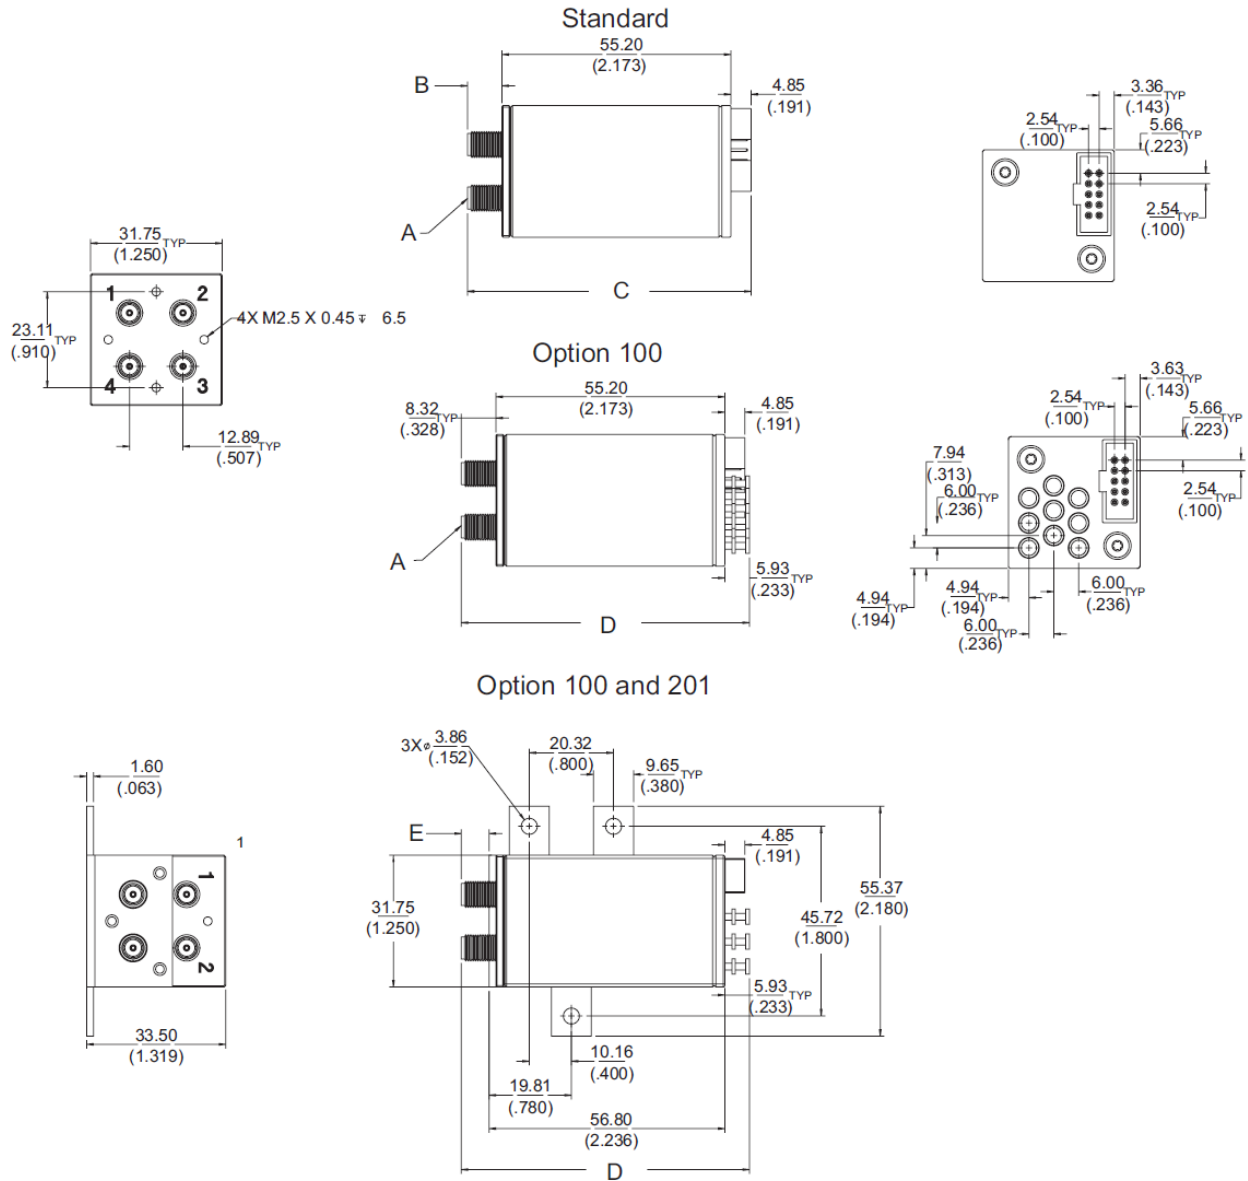

Dimensions are in millimeters and (inches) nominal unless otherwise specified.

1. One of four bracket configurations shown.

**Figure 13.** Product outlines

Keysight model number			A			B			C			D			E		
87222C	millimeter	SMA (f)	8.32	TYP	REF	6.72	REF	69.46	REF	68.37	REF	6.322					
	(inches)		(.328)			(.265)		(2.735)		(2.692)		(.249)					
87222D	millimeter	2.92 mm	8.32	TYP	REF	6.72	REF	69.46	REF	68.37	REF	6.722					
	(inches)	(f)	(.328)			(.265)		(2.735)		(2.692)		(.265)					
87222E	millimeter	2.4 mm	9.0	TYP	REF	7.40	REF	70.14	REF	69.05	REF	7.002					
	(inches)	(f)	(.354)			(.291)		(2.761)		(2.719)		(.276)					

## Ordering Guide

Keysight coaxial transfer switch

87222C DC to 26.5 GHz

87222D DC to 40 GHz

87222E DC to 50 GHz

- Option 100 Solder terminals in addition to ribbon cable
- Option 201 Mounting bracket-assembly required
- Option UK <sup>1</sup>
- Commercial calibration test data with certificate

Accessories available

87222-00003 Mounting bracket

## Keysight drivers

11713B/C attenuator switch driver

- Drives up to 10 switches

## Accessory cables

5061-0969 Viking connector to bare tinned wires (60 inches long).

- Use to connect 11713D/E to 87222C/D/E with Option 100
- Will operate four 87222C/D/E switches

11713-60047 Viking connector to (4) 10-pin DIP connectors.

- Will operate four 87222C/D/E switches using the 11713B/C driver

<sup>1</sup> Option UK6 not available with 87222D

## Related Literature

- Keysight Technologies Bench and System Switching Products, Literature Number 5989-9872EN
- Keysight RF and Microwave Switch, Selection Guide, Literature Number 5989-6031EN
- Keysight 11713D/E Attenuator/Switch Drivers, Configuration Guide, Literature Number 5989-7277EN

## Application Notes

- Power Handling Capability of Electromechanical Switches, Literature Number 5989-6032EN

Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at [www.keysight.com](http://www.keysight.com).