

# FieldFox Handheld Analyzers

4/6.5/9/14/18/26.5/32/44/50/54 GHz

This configuration guide describes configurations, options, and accessories for the FieldFox B-Series family of portable analyzers. Use this guide, along with the technical overview and data sheet, for a complete description of the analyzers. The table on page 3 titled “FieldFox B-Series Family and Options” shows a comparison of the functions available in the FieldFox B-Series family of analyzers.

Note: Combination analyzer (combo) = Cable and antenna tester (CAT) + Vector network analyzer (VNA) + Signal analyzer (SA).



## Included Accessories

The following accessories are included with every FieldFox:

- AC/DC adapter
- Battery
- Soft carrying case
- LAN cable

## Table of Contents

|  |    |
|--|----|
| FieldFox B-Series Family and Options .....                         | 3  |
| FieldFox RF and Microwave (Combination) Analyzers .....            | 4  |
| Analyzer options .....   | 5  |
| FieldFox RF and Microwave (Combination) Analyzer FAQs .....        | 6  |
| ERTA System Typical Configuration.....                             | 10 |
| FAQs – Applicable to all FieldFox RF and Microwave Analyzers ..... | 11 |
| FieldFox Signal Analyzers.....                                     | 13 |
| Analyzer options.....  | 13 |
| FieldFox Signal Analyzer FAQs .....                                | 14 |
| Upgrades.....  | 15 |
| FieldFox Signal Analyzer Upgrades.....                             | 16 |
| Documentation .....  | 18 |
| Calibration Kits .....   | 18 |
| Accessories .....  | 19 |

## FieldFox B-Series Family and Options

| Option                               | Description                                  | Combination Analyzers            |  |
|--------------------------------------|--|----------------------------------|--|
|                                      |  | N9913/4/5/6/7/8B<br>N9950/1/2/3B | Signal Analyzers<br>N9933/4/5/6/7/8B<br>N9960/1/2/3B |
| <b>CAT / vector network analysis</b> |  |                                  |  |
| 010                                  | VNA time domain                              | ✓                                | —  |
| 210                                  | VNA transmission/reflection                  | ✓                                | —  |
| 211                                  | VNA full 2-port S-parameters                 | ✓                                | —  |
| 212                                  | 1-port mixed-mode S-parameters               | ✓                                | —  |
| 215                                  | TDR cable measurements                       | ✓                                | —  |
| 305                                  | Cable and antenna analyzer                   | Base model <sup>1</sup>          | — <sup>2</sup>                                       |
| 308                                  | Vector voltmeter                             | ✓                                | —  |
| 320                                  | Reflection meas. (RL, VSWR and scalar meas.) | — <sup>3</sup>                   | ✓  |
| <b>Spectrum analysis</b>             |  |                                  |  |
| 209                                  | Extended range transmission analysis (ERTA)  | ✓                                | ✓  |
| 220                                  | Tracking generator                           | — <sup>4</sup>                   | ✓  |
| 233                                  | Spectrum analyzer                            | ✓                                | Base model <sup>1</sup>                              |
| 235                                  | Pre-amplifier                                | ✓                                | ✓  |
| 236                                  | Interference analyzer and spectrogram        | ✓                                | ✓  |
| 238                                  | Spectrum analyzer time gating                | ✓                                | ✓  |
| 312                                  | Channel scanner                              | ✓                                | ✓  |
| 350                                  | Real-time spectrum analyzer (RTSA)           | ✓                                | ✓  |
| 351                                  | I/Q analyzer (IQA)                           | ✓                                | ✓  |
| 352                                  | Indoor and outdoor mapping                   | ✓                                | ✓  |
| 353                                  | IQ streaming                                 | ✓                                | ✓  |
| 355                                  | Analog demodulation                          | ✓                                | ✓  |
| 356                                  | Noise figure (NF)                            | ✓                                | ✓  |
| 358                                  | EMF measurements                             | ✓                                | ✓  |
| 360                                  | Phased array antenna support                 | ✓                                | ✓  |
| 361                                  | EMI measurements                             | ✓                                | ✓  |
| 370                                  | Over-the-air (OTA) LTE FDD                   | ✓                                | ✓  |
| 371                                  | Over-the-air (OTA) LTE TDD                   | ✓                                | ✓  |
| 377                                  | Over-the-air (OTA) 5G TF                     | ✓                                | ✓  |
| 378                                  | Over-the-air (OTA) 5G NR                     | ✓                                | ✓  |
| B04                                  | Analysis bandwidth, 40 MHz <sup>5</sup>      | ✓                                | ✓  |
| B10                                  | Analysis bandwidth, 120 MHz <sup>5</sup>     | ✓                                | ✓  |
| <b>Power measurements</b>            |  |                                  |  |
| 208                                  | USB power sensor meas. versus frequency      | ✓                                | ✓  |
| 302                                  | USB power sensor support                     | ✓                                | ✓  |
| 310                                  | Built-in power meter                         | ✓                                | ✓  |
| 330                                  | Pulse meas. with USB peak power sensor       | ✓                                | ✓  |

1. Base model functionality listed is the primary function of that instrument. For example, on the N991x/5xB combo analyzers, cable and antenna analyzer is the standard function included with every N991x/5xB.
2. Option 305 is not available on the N993x/6xB. A subset of measurements, return loss and VSWR, is available as Option 320.
3. Option 320 is not applicable to N991x/5xB. The N991x/5xB includes reflection measurements of return loss and VSWR as standard functions.
4. On the N991x/5xB analyzers, order Options 233 and 210 to obtain a tracking generator with the spectrum analyzer. There is no Option 220 on the N991x/5xB analyzers. Option 233 provides the spectrum analyzer capability and Option 210 the "tracking" capability.
5. 10 MHz standard.

| Option                        | Description                             | Combination Analyzers<br>N9913/4/5/6/7/8B<br>N9950/1/2/3B | Signal Analyzers<br>N9933/4/5/6/7/8B<br>N9960/1/2/3B |
|-------------------------------|---|---|--|
| <b>System features</b>        |   |   |  |
| 030                           | Remote control capability               | ✓   | ✓  |
| 307                           | GPS receiver                            | ✓   | ✓  |
| 309                           | DC bias variable-voltage source         | ✓   | ✓  |
| —                             | Frequency extender support <sup>1</sup> | ✓   | ✓  |
| <b>Windows based software</b> |   |   |  |
| 89601B                        | PathWave VSA (89600 VSA) software       | ✓   | ✓  |
| N6820ES                       | Surveyor 4D software                    | ✓   | ✓  |

## FieldFox RF and Microwave (Combination) Analyzers

### Analyzer models

Step 1. Select the model that provides the desired frequency range.

| Model  | Description                          | CAT and VNA frequency | SA frequency <sup>2</sup> | Test port connectors |
|--------|--------------------------------------|-----------------------|---------------------------|----------------------|
| N9913B | 4 GHz FieldFox RF analyzer           | 30 kHz to 4 GHz       | 9 kHz to 4 GHz            | Type-N (f)           |
| N9914B | 6.5 GHz FieldFox RF analyzer         | 30 kHz to 6.5 GHz     | 9 kHz to 6.5 GHz          | Type-N (f)           |
| N9915B | 9 GHz FieldFox microwave analyzer    | 30 kHz to 9 GHz       | 9 kHz to 9 GHz            | Type-N (f)           |
| N9916B | 14 GHz FieldFox microwave analyzer   | 30 kHz to 14 GHz      | 9 kHz to 14 GHz           | Type-N (f)           |
| N9917B | 18 GHz FieldFox microwave analyzer   | 30 kHz to 18 GHz      | 9 kHz to 18 GHz           | Type-N (f)           |
| N9918B | 26.5 GHz FieldFox microwave analyzer | 30 kHz to 26.5 GHz    | 9 kHz to 26.5 GHz         | 3.5 mm (m)           |
| N9950B | 32 GHz FieldFox microwave analyzer   | 300 kHz to 32 GHz     | 9 kHz to 32 GHz           | 2.4 mm (m)           |
| N9951B | 44 GHz FieldFox microwave analyzer   | 300 kHz to 44 GHz     | 9 kHz to 44 GHz           | 2.4 mm (m)           |
| N9952B | 50 GHz FieldFox microwave analyzer   | 300 kHz to 50 GHz     | 9 kHz to 50 GHz           | 2.4 mm (m)           |
| N9953B | 54 GHz FieldFox microwave analyzer   | 300 kHz to 54 GHz     | 9 kHz to 54 GHz           | 1.8 mm (m)           |

- Models N9913/33B, N9914/34B and N9915/35B do not support frequency extenders. This is because the mixers' starting LO frequency is higher than 9 GHz and the FieldFox Port 1 provides the LO to the mixer. For a list of supported OML frequency extenders, see Accessories page 22.
- Useable to 5 kHz.

## Analyzer options

### Step 2. Select optional measurement capabilities.

Any of these options can easily be added as a software upgrade in the future.

| Option                               | Description                                 | Prerequisite options/notes  |
|--------------------------------------|---|---|
| <b>CAT / vector network analysis</b> |   |   |
| 010                                  | VNA time domain                             | Requires 210, recommend 211. See <a href="#">FAQ #7</a>   |
| 210                                  | VNA transmission/reflection                 | Recommend ordering a calibration kit. See <a href="#">FAQ #4</a> and <a href="#">FAQ #6</a>   |
| 211                                  | VNA full 2-port S-parameters                | Requires 210, recommend ordering a calibration kit. See <a href="#">FAQ #5</a>  |
| 212                                  | 1-port mixed-mode S-parameters              | Requires 210 and 211  |
| 215                                  | TDR cable measurements                      | —   |
| 308                                  | Vector voltmeter                            | 210 and 211 required for full VVM functionality. See <a href="#">FAQ #8</a>   |
| <b>Spectrum analysis</b>             |   |   |
| 209                                  | Extended range transmission analysis (ERTA) | Requires 233 and 210. Recommend 307. Requires two FieldFox units. See <a href="#">FAQ #9</a> . See page 10 for typical configuration.   |
| 233                                  | Spectrum analyzer                           | —   |
| 235                                  | Pre-amplifier                               | Requires 233  |
| 236                                  | Interference analyzer and spectrogram       | Requires 233  |
| 238                                  | Spectrum analyzer time gating               | Requires 233  |
| 312                                  | Channel scanner                             | Requires 233. Require the corresponding option to support a specific app. For example, to support EMF in channel scanner requires 358.  |
| 350                                  | Real-time spectrum analyzer (RTSA)          | Requires 233, Recommend 235. See <a href="#">FAQ #11</a>  |
| 351                                  | I/Q Analyzer (IQA)                          | Requires 233  |
| 352                                  | Indoor and outdoor mapping                  | Requires 233, 307, and at least one of 312, 360, 370, 371, 377 or 378. See <a href="#">FAQ #15</a>  |
| 353                                  | IQ streaming                                | Requires 233 and 351  |
| 355                                  | Analog demodulation                         | Requires 233  |
| 356                                  | Noise Figure (NF)                           | Requires 233, 235, 309 and accessory item N9910X-713 BNC to SMB cable. See <a href="#">FAQ #13</a> for external preamplifier and noise source requirements.   |
| 358                                  | EMF measurements                            | Requires 233. Also requires triaxial antenna. See <a href="#">FAQ #16</a>   |
| 360                                  | Phased array antenna support                | Requires 233. Also requires phased array antenna. N991x/3xB (x > 5) models require external mixer. No external mixer required for N995x/6xB models. See <a href="#">FAQ #14</a>                               |
| 361                                  | EMI measurements                            | Requires 233  |
| 370                                  | Over-the-air (OTA) LTE FDD                  | Requires 233 and 307. Recommend 235.  |
| 371                                  | Over-the-air (OTA) LTE TDD                  | Requires 233 and 307. Recommend 235.  |
| 377                                  | Over-the-air (OTA) 5G TF                    | Requires 233 and 307. Recommend 235. N991x/3xB (x > 5) models require external mixer. See <a href="#">FAQ #14</a> No external mixer required for N995x/6xB models. 5G TF is pre-5G standard                   |
| 378                                  | Over-the-air (OTA) 5G NR                    | Requires 233, B10, and 307. Recommend 235. N991x/3xB (x > 5) models require external mixer for FR2 frequencies above 26.5 GHz. See <a href="#">FAQ #18</a> . No external mixer required for N995x/6xB models. |
| B04                                  | Analysis bandwidth, 40 MHz <sup>1</sup>     | Requires 233. Recommend 350, 351 or PathWave VSA (formerly 89600 VSA) software  |
| B10                                  | Analysis bandwidth, 120 MHz <sup>1</sup>    | Requires 233. Recommend 350, 351, 378 or PathWave VSA (formerly 89600 VSA) software.  |
| <b>Power measurements</b>            |   |   |
| 208                                  | USB power sensor meas. versus frequency     | Requires 302. See <a href="#">FAQ I</a>   |
| 302                                  | USB power sensor support                    | Need to order USB power sensor <sup>2</sup> . See <a href="#">FAQ A</a>   |
| 310                                  | Built-in power meter                        | No power sensor required. See <a href="#">FAQ B</a>   |
| 330                                  | Pulse meas. with USB peak power sensor      | Requires 302 and USB peak power sensor. See <a href="#">FAQ G</a> and <a href="#">FAQ H</a>   |

1. 10 MHz standard.

2. List of compatible sensors available from [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport).

| Option                        | Description                       | Prerequisite options/notes   |
|-------------------------------|-----------------------------------|--|
| <b>System features</b>        |                                   |  |
| 030                           | Remote control capability         | Requires an iOS device or an Android device  |
| 307                           | GPS receiver                      | Need to order GPS antenna, N9910X-825. See <a href="#">FAQ C</a>   |
| 309                           | DC bias variable-voltage source   | Recommend N9910X-713 cable. See <a href="#">FAQ D</a>  |
| —                             | Frequency extender support        | Requires 233. Optional 350, 351, 360, 370, 371, 377, 378, PathWave VSA (formerly 89600 VSA) software. See Accessories, page 22 |
| <b>Windows based software</b> |                                   |  |
| 89601B                        | PathWave VSA (89600 VSA) software | Requires 233   |
| N6820ES                       | Surveyor 4D software              | Requires 233, 235 and 307. See <a href="#">FAQ #17</a>   |

## FieldFox RF and Microwave (Combination) Analyzer FAQs

| Question  | Answer   |
|---|--|
| 1. What is included with a base N991x/5xB analyzer? | The base model includes the cable and antenna analyzer   |
|   | Measurements: DTF (dB, linear, VSWR), return loss and DTF, return loss (dB), and 1-port cable loss   |
|   | Calibrations: CalReady, OSL, and response calibration  |
|   | Note: 2-port insertion loss is NOT included with the base model, if 2-port insertion loss is needed, order Option 210  |
|   | Note: Base analyzer does not have phase information, for S11 or S21 phase, order Option 210  |
| 2. What is included with N991x/5xB Option 233?      | Basic spectrum analysis, four traces, different detector types, radio standard selection, limit lines  |
|   | Channel power, occupied bandwidth, adjacent channel power, spectrum emission mask  |
|   | AM/FM tune and listen, field strength measurements, antenna factors, frequency counter marker  |
|   | Tracking generator (TG)/Independent source: <ul style="list-style-type: none"> <li>• TG CW mode (source CW frequency can be set independent of SA frequency) - included</li> <li>• TG CW coupled mode (source CW frequency auto coupled to SA's center frequency) - included</li> <li>• TG tracking mode (traditional TG operation, swept SA coupled to swept source) - (requires Option 210)</li> </ul> |
| 3. What is included with N991x/5xB Option 236?      | Interference analyzer and spectrogram, trace playback and recording  |
| 4. What is included with N991x/5xB Option 210?      | Option 210 adds a VNA with transmission/reflection (T/R) capability  |
|   | Measurements: S21, S11, magnitude and phase  |
|   | Additionally, in the CAT mode, you can measure 2-port insertion loss   |
|   | Calibrations: CalReady, OSL, response, and enhanced response calibration   |
|   | If you need all four S-parameters, order Options 210 and 211   |
|   | If you need 2-port calibration, order Options 210 and 211  |
|   | Adds tracking mode to the tracking generator/independent source included with Option 233, spectrum analyzer  |
| 5. What is included with N991x/5xB Option 211?      | Option 211 adds full 2-port S-parameter capability to the VNA mode   |
|   | Measurements: All four S-parameters (S11, S21, S22, S12), magnitude and phase  |
|   | Calibrations: CalReady, OSL, response, enhanced response, and full 2-port calibration  |



| Question   | Answer  |
|--|---|
| 6. Can I measure group delay on N991x/5xB analyzers? | If you have phase measurement capability, then you can measure group delay. Option 210 is required for any phase measurement capability. So, if you do not have Option 210, you cannot measure group delay.   |
| 7. What is included with N991x/5xB Option 010?       | S11/S21 in time domain if Option 210 is ordered. To get time domain data for all four S-parameters and full 2-port calibration, order Option 211.<br>View both time and frequency domain data at the same time<br>Low-pass, impulse, and band-pass modes<br>Minimum, medium, and maximum window<br>Gating   |
| 8. What is included with N991x/5xB Option 308?       | With Option 308: 1-port cable trimming<br>With Options 308 and 210: 1-port cable trimming, 2-port transmission<br>With Options 308, 210, and 211: 1-port cable trimming, 2-port transmission, A/B and B/A<br>Note: A/B and B/A measurements require an external source  |
| 9. What are the requirements for Option 209?         | Extended Range Transmission Analysis (ERTA) or Option 209 is a scalar measurement system based on the use of two (2) FieldFox units. One FieldFox acts as the <i>source</i> and reference receiver, while the second FieldFox acts as the <i>measurement</i> receiver. When different frequency models are used in an ERTA pair, the system frequency range is limited to the lowest of the pair.<br><b>Required hardware</b><br>A. Two (2) FieldFox units. FieldFox units can be any of these models:<br><ul style="list-style-type: none"> <li>FieldFox combination analyzers: N9913/14/15/16/17/18/50/51/52/53B</li> <li>FieldFox signal analyzers: N9933/34/35/36/37/38/60/61/62/63B</li> </ul> The two FieldFox units used in ERTA do not have to be the same model.<br>ERTA requires the following options on Combo FieldFox models (N9913/14/15/16/17/18/50/51/52/53B):<br><ul style="list-style-type: none"> <li>Option 210, VNA transmission/reflection</li> <li>Option 233, spectrum analyzer</li> </ul> ERTA requires the following options on SA FieldFox models (N9933/34/35/36/37/38/60/61/62/63B)<br><ul style="list-style-type: none"> <li>Option 220, tracking generator</li> </ul> Both FieldFox units (the one used as the source, and the other used as the receiver) must have the options listed above. The ERTA option (209) cannot be installed unless 210 and 233 are present on a combo analyzer; or 220 is present on a SA analyzer.<br>With either the Combo or SA FieldFox units, the following options are highly recommended:<br><ul style="list-style-type: none"> <li>Option 235, preamplifier – this option increases the measurement dynamic range by increasing the received signal power</li> <li>Option 307, GPS receiver – this option increases the dynamic range by increasing the frequency accuracy and permitting the use of a narrower RBW</li> </ul> B. Power splitter, two-resistor model, Keysight 11667A, 11667B, or 11667C. Other power splitters can be used but the specifications listed are based on the match and tracking performance of 11667A, 11667B, or 11667C. Three-resistor power splitters are not recommended.<br>C. N9910X-712, Trigger/Reference-in cable, SMA (m) to BNC(f), 1 m, quantity two<br>D. N9910X-713, Trigger/Reference-out cable, SMB (m) to BNC (m), 1 m, quantity two<br>E. LAN connection – For ERTA, the two FieldFox units communicate via a LAN connection. For a direct connection, a LAN cable is required. Or, both analyzers can be on a local area network.<br><b>Recommended accessory</b><br>F. N9910X-825, GPS Antenna. Necessary if Option 307 is ordered. |
| 10. What is included with Option 355?                | FieldFox analog demodulation has two parts: (1) Tune and listen, and (2) AM/FM metrics. Tune and listen is available with the purchase of the spectrum analyzer option 233. AM/FM metrics becomes available when Option 355 is purchased. AM/FM metrics provides the user with RF spectrum view, demodulated baseband signal waveform, carrier power, frequency deviation, SINAD and more.  |

| Question   | Answer   |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
|--|--|--|--|---------------------------------|-------------------------------------|-----|-----|---|-----|-----|--------------------------------------|-----|-----------------|
| 11. What is included with Option 350?  | Real-time spectrum analyzer (RTSA) or Option 350 provides real-time measurements. The FieldFox must be equipped with spectrum analysis capability. The preamplifier option is recommended, as elusive signals often have low power levels. The real-time bandwidth options include 10 MHz (standard), 40 MHz (Option B04), or 120 MHz (Option B10). RTSA includes trace recording and playback capabilities. It does not include a frequency-mask trigger (FMT).   |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| 12. Is Spectrum Analyzer Trace Recording and Playback standard or an option?   | Spectrum Analyzer mode (Option 233) does not include Trace Recording and Playback by default. To obtain this capability in SA mode, Option 236 Interference Analyzer and Spectrogram needs to be purchased.  |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
|  | RTSA mode (Option 350) does include Trace Recording and Playback by default in RTSA mode.  |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
|  | Purchasing RTSA mode (Option 350) does not enable Trace Recording and Playback in SA mode (Option 233).  |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
|  | <table border="1"> <thead> <tr> <th>Trace record/playback features</th> <th>SA mode<br/>SA &amp; Interference Analyzer<br/>Options 233 and 236</th> <th>RTSA mode<br/>RTSA<br/>Option 350</th> </tr> </thead> <tbody> <tr> <td>Record and playback spectrum traces</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>Save trace data with GPS time stamp over time</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>Record and playback spectrogram data</td> <td>Yes</td> <td>No <sup>1</sup></td> </tr> </tbody> </table>   | Trace record/playback features                               | SA mode<br>SA & Interference Analyzer<br>Options 233 and 236 | RTSA mode<br>RTSA<br>Option 350 | Record and playback spectrum traces | Yes | Yes | Save trace data with GPS time stamp over time | Yes | Yes | Record and playback spectrogram data | Yes | No <sup>1</sup> |
|  | Trace record/playback features   | SA mode<br>SA & Interference Analyzer<br>Options 233 and 236 | RTSA mode<br>RTSA<br>Option 350                              |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| Record and playback spectrum traces  | Yes  | Yes  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| Save trace data with GPS time stamp over time  | Yes  | Yes  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| Record and playback spectrogram data   | Yes  | No <sup>1</sup>  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
|  |  |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| 13. What are the requirements for Noise figure (NF) Option 356?  | Requires spectrum analyzer mode (Option 233 on combination models), internal preamplifier (Option 235) and DC bias variable voltage source (Option 309). An external noise source is also required and FieldFox supports Keysight noise source models 346A/B/C/K40/K01. Also recommended to improve accuracy is an external preamplifier Keysight models U7227A/C/F or U7228A/C/F. Requires accessory item N9910X-713 BNC to SMB cable for DC bias variable voltage source to noise source connection.   |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| 14. What is required for phased array antenna support (Option 360) and 5G NR over-the-air (OTA) measurements (Option 378)? | Requires spectrum analyzer mode (Option 233 on combination models) and GPS receiver (Option 307). Highly recommend internal preamplifier (Option 235). N991x/3xB (x>5) models require external mixer since phased array antenna, which can be ordered as Keysight 85571A-028 or directly from Anokiwave as AWMF-0129, operates at 28 GHz. See <a href="#">FAQ #18</a> for more OML mixer information. No external mixer required for N995x/6xB models.   |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| 15. What is included with indoor and outdoor mapping (Option 352)?   | The FieldFox mapping function is available in the following modes: Channel Scanner (312), Phased-Array Antenna (360), and OTA LTE FDD/TDD (370/371), OTA 5G TF (377), OTA 5G NR (378). Mapping is currently not available in SA or RTSA modes. Outdoor mapping requires the availability of GPS (Option 307). Maps can be saved to the FieldFox internal memory, SD card or USB drive. Using a direct wired LAN connection, FieldFox will automatically access OpenStreetMap (OSM) once location coordinates (latitude and longitude) and zoom levels have been entered the Map Explorer menu. If using the <a href="#">FieldFox Map Support Tool</a> , OSM map files can be downloaded to a .zip file and imported to FieldFox internal memory. If the FieldFox GPS receiver is enabled and OSM maps have been previously saved to FieldFox with those GPS coordinates, FieldFox can automatically load the corresponding map to match the current GPS coordinates. |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |
| 16. What is required for EMF measurements (Option 358)?  | Requires triaxial antenna. Supported antenna is AGOS advanced technologies Triaxial Isotropic Antenna model SDIA-6000 30 MHz to 6 GHz. It can also be ordered as Keysight 85572A-006. EMF measurements are supported with spectrum analyzer mode (Option 233 on combination models) and OTA 5G NR (Option 378).  |  |  |                                 |                                     |     |     |   |     |     |                                      |     |                 |

1. RTSA trace recordings can be recalled and played back in SA mode Spectrogram. This has the added benefit that the measurements are shown 'slower', making it easier for the human eye to decipher the signal content.



| Question   | Answer   |
|--|--|
| 17. What is required for N6820ES Surveyor 4D Software?                       | Surveyor 4D software connected to FieldFox spectrum analyzer mode offers a versatile, truly portable spectrum monitoring system that covers VLF to 50 GHz, including 5G millimeter wave bands. The software runs on an external PC or tablet. FieldFox required options include spectrum analyzer mode (Option 233 on combination models), preamplifier (Option 235) and built-in GPS receiver (Option 307). Core Surveyor 4D software for Windows (Option N6820ES-114) is required to run the Surveyor 4D software. Other Surveyor 4D software optional licenses that are supported include basic modulation recognition application (N6820ES-MR1) and universal signal detection (N6820ES-USD). Requires Surveyor 4D software version 4.3 or later (May 2019). Frequencies above 26.5 GHz will require external mixer for N991x/3xB (x>5) models. For external mixer information, <a href="#">FAQ #18</a> . N995x/6xB models eliminate the external mixer requirement. |
| 18. What is required for 5G NR over-the-air (OTA) measurements (Option 378)? | Requires spectrum analyzer mode (Option 233 on combination models), 120 MHz analysis bandwidth (Option B10) and GPS receiver (Option 307). Highly recommend internal preamplifier (Option 235). FR2 frequencies above 26.5 GHz will require external mixer for N991x/3xB (x>5) models. N995x/6xB models eliminate the external mixer requirements. For Keysight direct sales, mixer is orderable as Keysight model N9910XM28-H2A for 3.5 mm test ports or N99010xM28-H2N for type N test ports. For indirect sales, the mixer is orderable as OML Inc. model M28H2ADC-K, please see website <a href="http://www.omlinc.com">www.omlinc.com</a> for more information or contact a Keysight representative. OML mixer RF input interface is 2.92 mm (f). See Page 22 "Accessories" section for other supported OML mixers and OML frequency extender module adapter kits.  |
| <b>Keysight model: N9910XM28-H2A/N9910XM28-H2N or OML model: M28H2ADC-K</b>  |  |
| <b>Supported on FieldFox models</b>  | <b>N9916B, N9917B, N9918B, N9936B, N9937B, N9938B</b>  |
| RF input frequency range   | 24 to 40 GHz   |
| IF output frequency range  | 0.3 to 6.5 GHz   |
| LO harmonic number   | 2  |
| LO input frequency range   | 12 to 20 GHz   |
| LO input power   | -18 to -5 dBm  |
| Conversion factor IF = 1 GHz   | 10 dB (typical)  |
| Noise figure   | 12 dB (Includes internal IF amplifier)   |

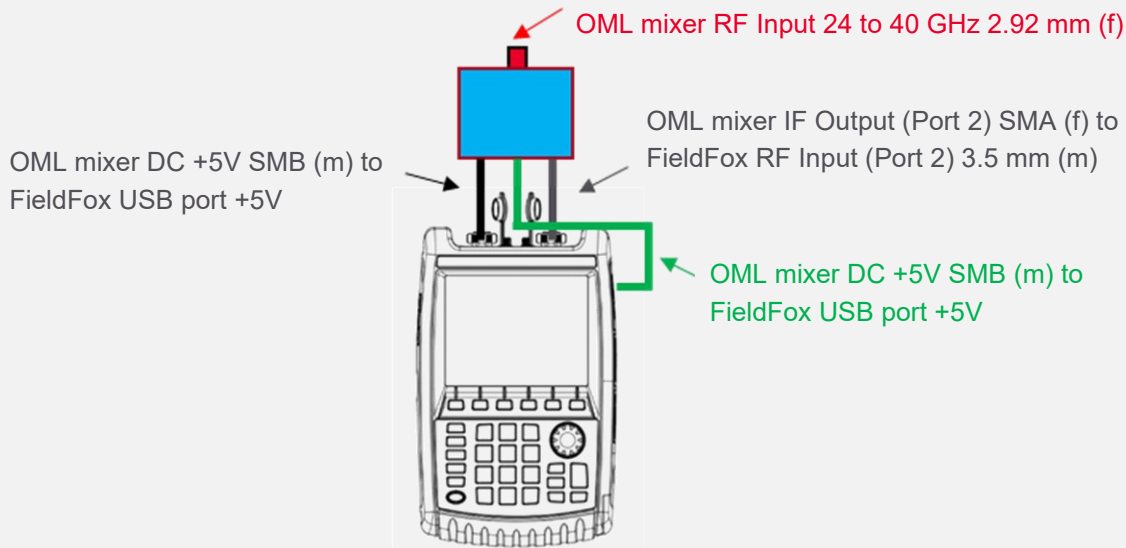


Figure 1. OML external mixer diagram <sup>1</sup>

1. This diagram is for OML M28H2ADC-K or Keysight N9910XM28-H2A. In case of Keysight N9910XM28-H2N, the mixer connectors for LO Input and IF Output are both Type-N. See "OML frequency extender modules" and "OML frequency extender module adapter kits" sections on page 22 for further details.

## ERTA System Typical Configuration

| Item                           | Description/Options  | Quantity                       |
|--------------------------------|--|--------------------------------|
| FieldFox                       | Combo analyzer: Required Options 210, 233. Recommended: 235, 307<br>SA analyzer: Required: Option 220. Recommended: 235, 307 | 2                              |
| Power splitter                 | 11667A (Type-N) or 11667B (3.5 mm)   | 1                              |
| Type-N(m) to Type-N(m) adapter | N9910X-850 (for use with 11667A or Type-N systems)   | 1                              |
| Trigger cables <sup>1</sup>    | N9910X-712, SMA(m) to BNC(f)<br>N9910X-713, SMB(m) to BNC(m)   | 2 of each<br>Total of 4 cables |
| RF test cable                  | Connecting FieldFox source port 1 to power splitter input  | 1                              |
| RF test cable or adapter       | Connecting power splitter output arm to FieldFox port 2  | 1                              |
| RF jumper cable or adapter     | Power splitter output arm to DUT input   | 1                              |
| RF jumper cable or adapter     | DUT output to FieldFox receiver port 2   | 1                              |
| LAN cable                      | LAN cable to connect two FieldFox units directly, or the analyzers must be on the LAN  | 1                              |
| N9910X-825                     | GPS antenna, recommended. Necessary if Option 307 is ordered.  | 2                              |



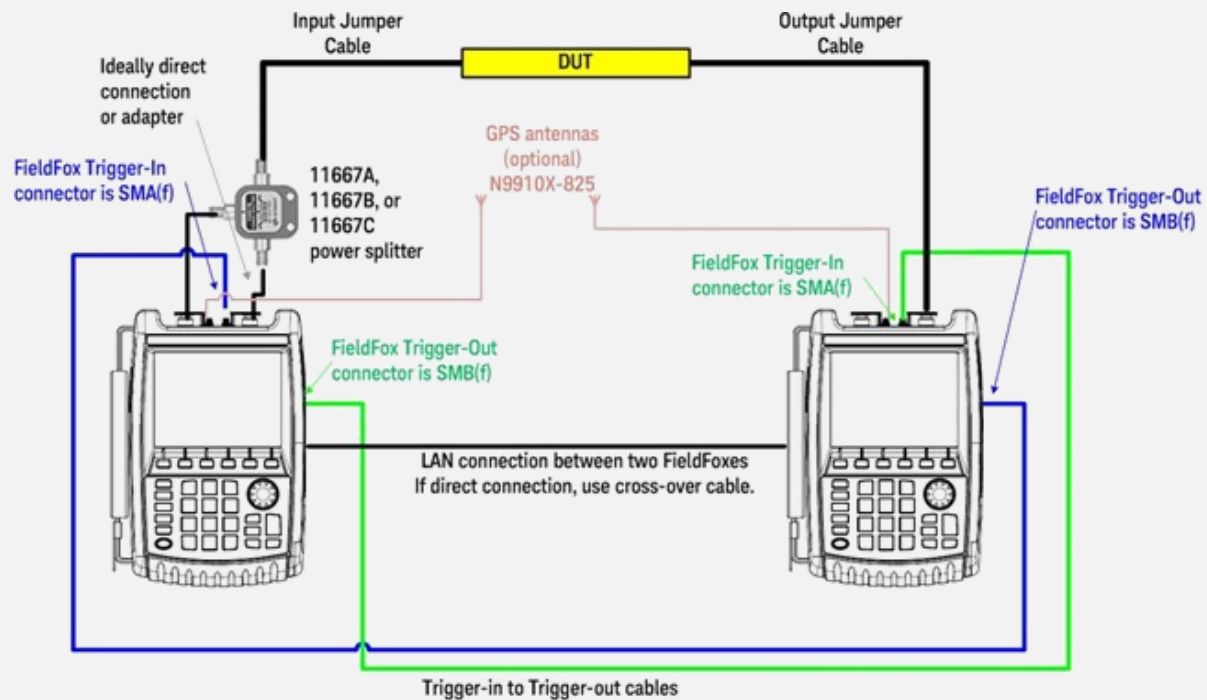


Figure 2. ERTA system diagram

1. The trigger cables and LAN cables must be at least as long as the separation distance between the two ends of the DUT.

## FAQs – Applicable to all FieldFox RF and Microwave Analyzers

| Question   | Answer   |   |
|--|--|---|
| A. What USB power sensors work with Option 302?  | All Keysight U2000x Series USB power sensors are supported with FieldFox. Visit: <a href="http://www.keysight.com/find/fieldfoxsupport">www.keysight.com/find/fieldfoxsupport</a> for an up-to-date listing. |   |
| B. What is the difference between USB power sensor (Option 302) and built-in power meter (Option 310)? | <b>Option 302<br/>USB power sensor</b>   | <b>Option 310<br/>Built-in power meter (or channel power meter)</b>   |
| Description  | Option 302 allows users to connect a USB power sensor to FieldFox's USB port and make broadband power measurements   | Option 310 is a channelized power measurement capability built into FieldFox analyzers. Maximum bandwidth is 100 MHz.   |
| External hardware  | USB power sensor required  | None. Uses internal receiver.   |
| Power measurement  | Broadband diode detector measures all frequencies  | Tuned receiver, so measures frequencies within defined channel bandwidth  |
| Frequency range  | Depends on USB sensor  | Frequency range of the analyzer   |
| Settings   | Set CW frequency   | Set CW frequency, set channel width/span  |
| Power range  | Depends on USB sensor  | Depends on channel width and attenuator setting   |
| Warm-up time   | 30 minutes to meet accuracy specifications   | No warm-up time required  |
| Accuracy   | Depends on USB sensor  | InstAlign accuracy: $\pm 0.5$ dB typical for a CW signal. Since the measurement is within a certain frequency channel or bandwidth, to make an accurate measurement, the user needs to know the exact center frequency and the signal's bandwidth and set those accurately. |
| Programmable   | Yes, via SCPI  | Yes, via SCPI   |
| Physical connection  | The power sensor can easily be moved to the measurement point, with a USB cable connecting the detector to FieldFox.   | The measurement point needs to be connected to FieldFox's RF input port. If an RF jumper cable is used, the user needs to account for the loss of the cable with an offset value (can be entered into the analyzer).  |
| FieldFox source control  | Yes, on/off, and nominal power level control   | No access to FieldFox's source from the built-in power meter mode   |

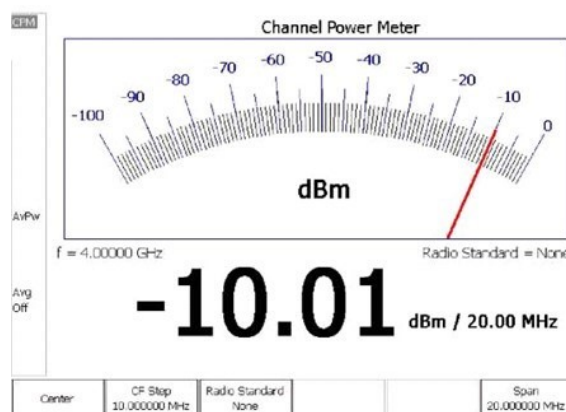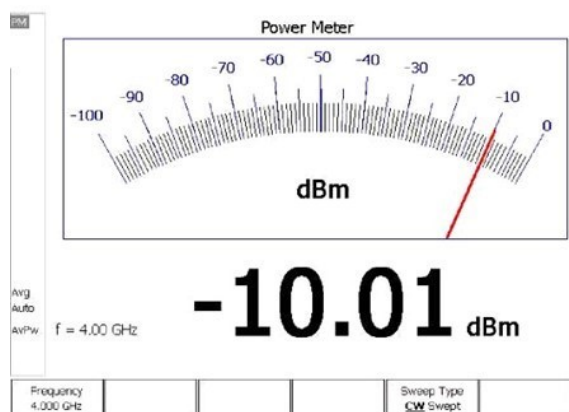

| Question  | Answer  |
|---|---|
| C. What do I need to get GPS information?   | <p>1. The recommended GPS solution is to order:</p> <ul style="list-style-type: none"> <li>• Option 307 - built-in GPS receiver</li> <li>• A GPS antenna such as N9910X-825</li> <li>• Other GPS antennas can also be used</li> <li>• The connector for GPS antenna on the instrument is SMA (f)</li> </ul> <p>2. Alternatively, you can purchase a USB-based GPS receiver. You do not need to purchase any FieldFox options for the USB-based GPS to work. However, the USB-based GPS only provides time and location data, and time synchronization capability. It cannot be used to increase the frequency accuracy of the instrument.</p> |
| D. What is the connector for Option 309, DC output?                                 | The DC output has a SMB (m) connector. Recommend ordering N9910X Option 713 bias-tee power cable SMB (f) to BNC (m).  |
| E. What are the connectors for the Reference/Trigger In and Reference/ Trigger Out? | <p>The connector for the Ref/Trig In is SMA (f). Recommend ordering N9910X Option 712 Trig/Ref in SMA (m) to BNC (f) cable.</p> <p>The connector for the Ref/Trig Out is SMB (m). Recommend ordering N9910X Option 713 bias-tee power cable SMB (f) to BNC (m).</p>   |
| F. What is Option 030 remote control capability?                                    | <p>1. Option 030 provides a license for FieldFox to allow remote control via an iOS device or an Android device.</p> <p>2. Not supplied by user, but necessary for operation of Option 030 are:</p> <ul style="list-style-type: none"> <li>• iOS device with iOS 6.1 or higher, or an Android device, with free FieldFox app</li> <li>• A Wi-Fi or 3G/4G network connection between FieldFox and iOS device or an Android device</li> </ul>   |
| G. What USB sensor is required for Option 330?                                      | Option 330 or pulse measurements requires Option 302 and a Keysight USB peak power sensor. Visit <a href="http://www.keysight.com/find/usbsensorsforfieldfox">www.keysight.com/find/usbsensorsforfieldfox</a> for a list of supported peak power sensors. Average power sensors cannot be used with Option 330, only peak power sensors. The peak power sensor needs to be purchased separately.  |
| H. What measurement capabilities are included with Option 330?                      | <p>Average power, peak power, and peak to average ratio</p> <p>Analog gauge display and digital display, dBm and watts</p> <p>Relative/absolute measurements, dB or %, minimum and maximum limits</p> <p>Trace graph for pulse profiling with gating</p> <p>Rise time, fall time, pulse width, pulse period, pulse repetition frequency</p>   |
| I. What is included with Option 208?  | Option 302, USB power sensor measurements, includes <b>CW</b> power measurements (one frequency at a time). With Option 208 added, you can make <b>swept-frequency</b> power measurements. You can plot source power, gain, and receive power versus frequency. Additionally, the source frequency can be offset from the receiver frequency. The power sensor needs to be purchased separately.  |

# FieldFox Signal Analyzers

## Analyzer models

Step 1. Select the model that provides the desired frequency range.

| Model  | Description                       | Frequency range <sup>1</sup> | Test port connectors    |
|--------|-----------------------------------|------------------------------|-------------------------|
| N9933B | 4 GHz FieldFox signal analyzer    | 9 kHz to 4 GHz               | Type-N (f)              |
| N9934B | 6.5 GHz FieldFox signal analyzer  | 9 kHz to 6.5 GHz             | Type-N (f)              |
| N9935B | 9 GHz FieldFox signal analyzer    | 9 kHz to 9 GHz               | Type-N (f)              |
| N9936B | 14 GHz FieldFox signal analyzer   | 9 kHz to 14 GHz              | Type-N (f)              |
| N9937B | 18 GHz FieldFox signal analyzer   | 9 kHz to 18 GHz              | Type-N (f)              |
| N9938B | 26.5 GHz FieldFox signal analyzer | 9 kHz to 26.5 GHz            | Type-N (f) <sup>2</sup> |
| N9960B | 32 GHz FieldFox signal analyzer   | 9 kHz to 32 GHz              | 2.4 mm (m)              |
| N9961B | 44 GHz FieldFox signal analyzer   | 9 kHz to 44 GHz              | 2.4 mm (m)              |
| N9962B | 50 GHz FieldFox signal analyzer   | 9 kHz to 50 GHz              | 2.4 mm (m)              |
| N9963B | 54 GHz FieldFox signal analyzer   | 9 kHz to 54 GHz              | 1.8 mm (m)              |

## Analyzer options

Step 2. Select optional measurement capabilities.

You can also add any of these options as a software upgrade in the future.

| Option                   | Description  | Prerequisite options/notes  |
|--------------------------|--|---|
| <b>Spectrum analysis</b> |  |   |
| 100 <sup>2</sup>         | 3.5 mm (m) connectors                                  | Only available on N9938B. Option 100 is only available at time of purchase. It is not available as an upgrade.  |
| 209                      | Extended range transmission analysis (ERTA)            | Requires 220. Recommend 307. Requires two FieldFox units. See <a href="#">FAQ # 9</a> . See page 10 for typical configuration.                                  |
| 220                      | Full-band tracking generator                           | CW, CW coupled, and tracking  |
| 235                      | Pre-amplifier  | —   |
| 236                      | Interference analyzer and spectrogram                  | —   |
| 238                      | Spectrum analyzer time gating                          | —   |
| 312                      | Channel scanner  | Require the corresponding option to support a specific app. For example, to support EMF in channel scanner requires 358.  |
| 320                      | Reflection measurements (Return Loss, VSWR and Scalar) | 320 requires 220 on all models. On N9938B, 320 also requires 100.   |
| 350                      | Real-time spectrum analyzer (RTSA)                     | Recommend 235. See <a href="#">FAQ # 11</a>   |
| 351                      | I/Q Analyzer (IQA)                                     | —   |
| 352                      | Indoor and outdoor mapping                             | Requires 307, and at least one of 312, 360, 370, 371, 377 or 378. See <a href="#">FAQ #15</a>   |
| 353                      | IQ streaming   | Requires 351  |
| 355                      | Analog demodulation                                    | —   |
| 356                      | Noise Figure (NF)                                      | Requires 235, 309 and accessory item N9910X-713 BNC to SMB cable. See <a href="#">FAQ #13</a> for external preamplifier and noise source requirements.          |
| 358                      | EMF measurements                                       | Requires triaxial isotropic antenna. See <a href="#">FAQ #16</a>  |
| 360                      | Phased array antenna support                           | Requires phased array antenna. N991x/3xB (x>5) models require an external mixer. See <a href="#">FAQ #14</a> . No external mixer required for N995x/6xB models. |
| 361                      | EMI measurements                                       | —   |
| 370                      | Over-the-air (OTA) LTE FDD                             | Requires 307, recommend 235.  |

1. Useable to 5 kHz.

2. Order Option 100 for 3.5 mm (m) test port connectors. With N9938B-100, the spectrum analyzer is built with 3.5 mm test port connectors instead of the standard Type-N (f). Option 100 is a prerequisite for Option 320 for N9938B.

| Option                        | Description  | Prerequisite options/notes  |
|-------------------------------|--|---|
| 371                           | Over-the-air (OTA) LTE TDD                             | Requires 307, recommend 235.  |
| 377                           | Over-the-air (OTA) 5G TF                               | Requires 307, recommend 235. N991x/3xB (x > 5) models require an external mixer. See <a href="#">FAQ #14</a> . No external mixer required for N995x/6xB models.   |
| 378                           | Over-the-air (OTA) 5G NR                               | Requires B10 and 307. Recommend 235. N991x/3xB (x > 5) models require external mixer for FR2 frequencies above 26.5 GHz. See <a href="#">FAQ #18</a> . No external mixer required for N995x/6xB models. |
| B04                           | Analysis bandwidth, 40 MHz <sup>1</sup>                | Recommend 350, 351 or PathWave VSA (formerly 89600 VSA) software  |
| B10                           | Analysis bandwidth, 120 MHz <sup>1</sup>               | Recommend 350, 351, 378 or PathWave VSA (formerly 89600 VSA) software   |
| <b>Power measurements</b>     |  |   |
| 208                           | USB power sensor meas. versus frequency                | Requires 302. See <a href="#">FAQ I</a>   |
| 302                           | USB power sensor support                               | Need to order USB power sensor <sup>2</sup> . See <a href="#">FAQ A</a>   |
| 310                           | Built-in power meter                                   | No power sensor required. See <a href="#">FAQ B</a>   |
| 330                           | Pulse meas. with USB peak power sensor                 | Requires 302 and USB peak power sensor. See <a href="#">FAQ G</a> and <a href="#">FAQ H</a>   |
| 320                           | Reflection measurements (Return Loss, VSWR and Scalar) | Requires 220 on all models. On N9938B specifically, also requires 100.  |
| <b>System features</b>        |  |   |
| 030                           | Remote control capability                              | Requires an iOS device or an Android device   |
| 307                           | GPS receiver   | Need to order GPS antenna, N9910X-825. See <a href="#">FAQ C</a>  |
| 309                           | DC bias variable-voltage source                        | Recommend N9910X-713 cable, See <a href="#">FAQ D</a>   |
| —                             | Frequency extender support                             | Optional 350, 351, 360, 370, 371, 377, 378, PathWave VSA software. See <a href="#">Accessories</a> , page 22  |
| <b>Windows based software</b> |  |   |
| 89601B                        | PathWave VSA (89600 VSA) software                      | —   |
| N6820ES                       | Surveyor 4D software                                   | Requires 235 and 307, see page 9, <a href="#">FAQ #17</a>   |

## FieldFox Signal Analyzer FAQs

| Question   | Answer  |
|--|---|
| 1. What is included with the basic signal analyzer?                                    | Basic spectrum analysis, four traces, different detector types, radio standard selection, limit lines<br>Channel power, occupied bandwidth, adjacent channel power, spectrum emission mask<br>AM/FM tune and listen, field strength measurements, antenna factors, frequency counter marker   |
| 2. What is included with Option 236?   | Interference analyzer and spectrogram<br>Trace playback and recording   |
| 3. What is included with Option 320?   | Return loss and VSWR<br>Normalization using data/memory   |
| 4. What is the difference between Option 320 and the CAT mode on the combo base model? | Option 320 on the N993x/6xB SA offers RL and VSWR. CAT mode on the N991x/5x combo analyzers offer RL and VSWR, DTF, insertion loss, and various calibration capabilities such as OSL.   |
| 5. What is included with Option 355?   | FieldFox analog demodulation has two parts: (1) Tune and listen, and (2) AM/FM metrics. Tune and listen are available as a standard feature on all N993x/6x FieldFox spectrum analyzers. AM/FM metrics becomes available when Option 355 is purchased. AM/FM metrics provides the user with RF spectrum view, demodulated baseband signal waveform, carrier power, frequency deviation, SINAD and more. |
| Additional FAQs  | FAQs on pages 8 through 12 apply to all FieldFox models.  |

1. 10 MHz standard.

2. List of compatible sensors available from [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport).



## Upgrades

FieldFox RF and Microwave (combination) Analyzer Upgrades  
 N9913BU, N9914BU, N9915BU, N9916BU, N9917BU, N9918BU,  
 N9950BU, N9951BU, N9952BU, N9953BU



Information on upgrades is available from: [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)

| Option | Description                                    | Upgrade contents         | Additional requirements   |
|--------|--|--------------------------|---|
| 010    | VNA time domain analysis                       | License key              | Requires 210, recommend 211   |
| 030    | Remote control capability                      | License key              | Requires an iOS device or an Android device   |
| 208    | USB power sensor measurements versus frequency | License key              | Requires 302  |
| 209    | Extended range transmission analysis (ERTA)    | License key              | Requires 233 and 210 <sup>1</sup> , recommend 307                                   |
| 210    | VNA transmission and reflection                | License key              | None  |
| 211    | VNA full 2-port S-parameters                   | License key              | Requires 210  |
| 212    | Mixed-mode S-parameters                        | License key              | Requires 210 and 211  |
| 215    | TDR cable measurements                         | License key              | None  |
| 233    | Spectrum analyzer                              | License key              | None  |
| 235    | Preamplifier                                   | License key              | Requires 233  |
| 236    | Interference analyzer and spectrogram          | License key              | Requires 233  |
| 238    | Spectrum analyzer time gating                  | License key              | Requires 233  |
| 302    | External USB power sensor support              | License key              | None  |
| 307    | GPS receiver                                   | License key              | None  |
| 308    | Vector voltmeter                               | License key              | Requires 210 and 211 for full VVM functionality                                     |
| 309    | DC bias variable-voltage source                | License key              | Recommend N9910X-713 cable  |
| 310    | Built-in power meter                           | License key              | None  |
| 312    | Channel scanner                                | License key              | Requires 233  |
| 330    | Pulse measurements                             | License key              | Requires 302 and USB peak power sensor  |
| 350    | Real-time spectrum analyzer (RTSA)             | License key              | Requires 233, recommend 235   |
| 351    | I/Q Analyzer (IQA)                             | License key              | Requires 233  |
| 352    | Indoor and outdoor mapping                     | License key              | Requires 233, 307, and at least one of 312, 360, 370, 371, 377 or 378.              |
| 353    | IQ streaming                                   | License key              | Requires 233 and 351  |
| 355    | Analog demodulation                            | License key              | Requires 233  |
| 356    | Noise figure (NF)                              | License key <sup>2</sup> | Requires 233, 235, 309 and accessory cable N9910X-713                               |
| 358    | EMF measurements                               | License key              | Requires 233. Also requires triaxial isotropic antenna. See <a href="#">FAQ #16</a> |
| 360    | Phased array antenna support <sup>2</sup>      | License key              | Requires 233. Also requires phased array antenna. See <a href="#">FAQ #14</a>       |
| 361    | EMI measurements                               | License key              | Requires 233  |
| 370    | Over-the-air (OTA) LTE FDD                     | License key              | Requires 233 and 307, recommend 235   |
| 371    | Over-the-air (OTA) LTE TDD                     | License key              | Requires 233 and 307, recommend 235   |

1. Option 209 is a system based on two FieldFox units. See [FAQ #9](#), for a detailed description of the system requirements.  
 2. See [FAQ #13](#) for external preamplifier and noise source requirements.

| Option | Description                              | Upgrade contents | Additional requirements  |
|--------|--|------------------|--|
| 377    | Over-the-air (OTA) 5G TF <sup>3</sup>    | License key      | Requires 233 and 307, recommend 235  |
| 378    | Over-the-air (OTA) 5G NR                 | License key      | Requires 233, B10, and 307, recommend 235; N991x/3xB models require external mixer for FR2 frequencies above 26.5 GHz. See <a href="#">FAQ #18</a> |
| B04    | Analysis bandwidth, 40 MHz <sup>4</sup>  | License key      | Requires 233. Recommend 350, 351 or PathWave VSA (formerly 89600 VSA) software   |
| B10    | Analysis bandwidth, 120 MHz <sup>4</sup> | License key      | Requires 233. Recommend 350, 351, 378 or PathWave VSA (formerly 89600 VSA) software  |

## FieldFox Signal Analyzer Upgrades

N9933BU, N9934BU, N9935BU, N9936BU, N9937BU, N9938BU, N9960BU, N9961BU, N9962BU, N9963BU

| Option | Description  | Upgrade contents         | Additional requirements   |
|--------|--|--------------------------|---|
| 030    | Remote control capability                              | License key              | Requires an iOS device or an Android device   |
| 100    | 3.5 mm connectors                                      | Not applicable           | Not applicable  |
| 208    | USB power sensor measurements versus frequency         | License key              | Requires 302  |
| 209    | Extended range transmission analysis (ERTA)            | License key              | Requires 220 <sup>5</sup> , recommend 307   |
| 220    | Full-band tracking generator                           | License key              | None  |
| 235    | Preamplifier   | License key              | None  |
| 236    | Interference analyzer and spectrogram                  | License key              | None  |
| 238    | Spectrum analyzer time gating                          | License key              | None  |
| 302    | External USB power sensor support                      | License key              | None  |
| 307    | GPS receiver   | License key              | None  |
| 309    | DC bias variable-voltage source                        | License key              | Recommend N9910X-713 cable  |
| 310    | Built-in power meter                                   | License key              | None  |
| 312    | Channel scanner  | License key              | None  |
| 320    | Reflection measurements (Return Loss, VSWR and Scalar) | License key <sup>1</sup> | Option 220 for all models<br>Option 100 and 220 for N9938B  |
| 330    | Pulse measurements                                     | License key              | Requires 302 and USB peak power sensor  |
| 350    | Real-time spectrum analyzer (RTSA)                     | License key              | Recommend 235   |
| 351    | I/Q Analyzer (IQA)                                     | License key              | None  |
| 352    | Indoor and outdoor mapping                             | License key              | Requires 307, and at least one of 312, 360, 370, 371, 377 or 378.   |
| 353    | IQ streaming   | License key              | Requires 351  |
| 355    | Analog demodulation                                    | License key              | None  |
| 356    | Noise figure (NF)                                      | License key <sup>2</sup> | Requires 235, 309 and accessory cable N9910X-713  |
| 358    | EMF measurements                                       | License key              | Requires triaxial isotropic antenna. See <a href="#">FAQ #16</a>  |
| 360    | Phased array antenna support <sup>3</sup>              | License key              | Requires phased array antenna. External mixer for N991xB/3xB. See <a href="#">FAQ#14</a>  |
| 361    | EMI measurements                                       | License key              | None  |
| 370    | Over-the-Air (OTA) LTE FDD                             | License key              | Requires 307, recommend 235   |
| 371    | Over-the-Air (OTA) LTE TDD                             | License key              | Requires 307, recommend 235   |
| 377    | Over-the-Air (OTA) 5G TF <sup>3</sup>                  | License key              | Requires 307, recommend 235   |
| 378    | Over-the-air (OTA) 5G NR                               | License key              | Requires B10 and 307, recommend 235. N993xB models require external mixer for FR2 frequencies above 26.5 GHz. See <a href="#">FAQ #18</a> |

| Option | Description                              | Upgrade contents | Additional requirements  |
|--------|--|------------------|--|
| B04    | Analysis bandwidth, 40 MHz <sup>4</sup>  | License key      | Recommend 350, 351 or PathWave VSA (formerly 89600 VSA) software |
| B10    | Analysis bandwidth, 120 MHz <sup>4</sup> | License key      | Recommend 350, 351 or PathWave VSA (formerly 89600 VSA) software |

1. For N9938B, Option 320 is only available as a software upgrade if the spectrum analyzer is already equipped with Option 100, within is 3.5 connectors on the test port. Option 100 must have been ordered at the time of original purchase. It cannot be added later.
2. See [FAQ #13](#) for external preamplifier and noise source requirements.
3. Requires external mixer for N991x/3xB (x>5) models. See [FAQ #14](#). No external mixer required for N995x/6xB.
4. 10 MHz standard.
5. Option 209 is a system based on two FieldFox units. See [FAQ #9](#) for the detailed system requirements description.

## Documentation

By default, a printed copy of the User's Guide is not included in FieldFox orders. If you wish to receive the printed User's Guide, please order N99xxB Option ABA.

| Option     | Description                     | Notes |
|------------|---------------------------------|-------|
| N99xxB-0B0 | Do not include User's Guide     |       |
| N99xxB-ABA | Printed User's Guide in English |       |

The latest FieldFox User's Guide (manual) is available online from: [www.keysight.com/find/fieldfoxsupport](http://www.keysight.com/find/fieldfoxsupport)

The Service Guide, SCPI Programming Guide, Quick Reference Guide, and Data Link software help file can also be found via the website above.

## Calibration Kits

FieldFox analyzers support most standard HP/Agilent/Keysight mechanical calibration kits and all Keysight USB ECal modules. Component list shows calibration components, some calibration kits also include adaptors. Custom calibration kits can be created and uploaded to FieldFox using Data Link software.

| Model                   | Description           | Connector  | Frequency range                   | Components  |
|-------------------------|-----------------------|------------|-----------------------------------|---|
| <b>7-16</b>             |                       |            |                                   |   |
| N9910X-802              | 3-in-1 OSL cal kit    | 7/16 (m)   | DC to 4 GHz                       | Open, short, load (all male)                            |
| N9910X-803              | 3-in-1 OSL cal kit    | 7/16 (f)   | DC to 4 GHz                       | Open, short, load (all female)                          |
| 85038A                  | Standard cal kit      | 7/16       | DC to 7.5 GHz                     | Open, short, load (both female and male)                |
| <b>Type-N, 50 Ω</b>     |                       |            |                                   |   |
| N9910X-800 <sup>1</sup> | 3-in-1 OSL cal kit    | Type-N (m) | DC to 6 GHz                       | Open, short, load (all male)                            |
| N9910X-801 <sup>1</sup> | 3-in-1 OSL cal kit    | Type-N (f) | DC to 6 GHz                       | Open, short, load (all female)                          |
| 85032E                  | Economy cal kit       | Type-N (m) | DC to 6 GHz                       | Open, short, load (all male)                            |
| 85514A                  | 4-in-1 OSLT cal kit   | Type-N (m) | DC to 9 GHz                       | Open, short, load, thru (all male)                      |
| 85515A                  | 4-in-1 OSLT cal kit   | Type-N (f) | DC to 9 GHz                       | Open, short, load, thru (all female)                    |
| 85032F                  | Standard cal kit      | Type-N     | DC to 9 GHz                       | Open, short, load (both female and male)                |
| 85518A                  | 4-in-1 OSLT cal kit   | Type-N (m) | DC to 18 GHz                      | Open, short, load, thru (all male)                      |
| 85519A                  | 4-in-1 OSLT cal kit   | Type-N (f) | DC to 18 GHz                      | Open, short, load, thru (all female)                    |
| 85054D                  | Economy cal kit       | Type-N     | DC to 18 GHz                      | Open, short, load, thru (female and male)               |
| 85054B                  | Standard cal kit      | Type-N     | DC to 18 GHz                      | Open, short, fixed load, sliding load (female and male) |
| 85092C                  | ECal, 2-ports         | Type-N     | 300 kHz to 9 GHz                  | Connectors configurable                                 |
| N4690B/C                | ECal, 2-ports         | Type-N     | 300 kHz to 18 GHz                 | Connectors configurable                                 |
| N4690D                  | ECal, 2-ports         | Type-N     | 300 kHz to 18 GHz or DC to 18 GHz | Connectors configurable                                 |
| N7550A                  | ECal economy, 2-ports | Type-N     | DC to 4 GHz                       | Connectors configurable                                 |
| N7551A                  | ECal economy, 2-ports | Type-N     | DC to 6.5 GHz                     | Connectors configurable                                 |
| N7552A                  | ECal economy, 2-ports | Type-N     | DC to 9 GHz                       | Connectors configurable                                 |
| N7553A                  | ECal economy, 2-ports | Type-N     | DC to 14 GHz                      | Connectors configurable                                 |
| N7554A                  | ECal economy, 2-ports | Type-N     | DC to 18 GHz                      | Connectors configurable                                 |

1. This calibration kit is not eligible for annual re-calibration. There are also no data report calibrations (UK6, 1A7 and A6J). If annual calibration is required, please order 85514A or 85515A.

| Model                                | Description           | Connector      | Frequency range                       | Components   |
|--------------------------------------|-----------------------|----------------|---------------------------------------|--|
| <b>Type-N, 75 Ω<sup>1</sup></b>      |                       |                |                                       |  |
| 85036B                               | Standard cal kit      | Type-N 75 Ω    | DC to 3 GHz                           | Open, short, load (both female and male)                           |
| 85036E                               | Economy cal kit       | Type-N(m) 75 Ω | DC to 3 GHz                           | Open, short, load, all male  |
| 85096C                               | ECal, 2-ports         | Type-N(m) 75 Ω | 300 kHz to 3 GHz                      | Connectors configurable  |
| <b>3.5 mm</b>                        |                       |                |                                       |  |
| 85520A                               | 4-in-1 OSLT           | 3.5 mm (m)     | DC to 26.5 GHz                        | Open, short, load, thru (all male)                                 |
| 85521A                               | 4-in-1 OSLT           | 3.5 mm (f)     | DC to 26.5 GHz                        | Open, short, load, thru (all female)                               |
| 85033D/E                             | Economy cal kit       | 3.5 mm         | DC to 6/9 GHz                         | Open, short, fixed load (both female and male)                     |
| 85052D                               | Economy cal kit       | 3.5 mm         | DC to 26.5 GHz                        | Open, short, fixed load (both female and male)                     |
| 85052B                               | Standard cal kit      | 3.5 mm         | DC to 26.5 GHz                        | Open, short, fixed load, sliding load (both female and male)       |
| 85052C                               | Precision TRL kit     | 3.5 mm         | DC to 26.5 GHz                        | Open, short, fixed load (both female and male), two-line lengths   |
| 85093C                               | ECal, 2-ports         | 3.5 mm         | 300 kHz to 9 GHz                      | Connectors configurable  |
| N4691B <sup>2</sup>                  | ECal, 2-ports         | 3.5 mm         | 300 kHz to 26.5 GHz                   | Connectors configurable  |
| N4691D                               | ECal, 2-ports         | 3.5 mm         | 300 kHz to 26.5 GHz or DC to 26.5 GHz | Connectors configurable  |
| N7550A                               | ECal economy, 2-ports | 3.5 mm         | DC to 4 GHz                           | Connectors configurable  |
| N7551A                               | ECal economy, 2-ports | 3.5 mm         | DC to 6.5 GHz                         | Connectors configurable  |
| N7552A                               | ECal economy, 2-ports | 3.5 mm         | DC to 9 GHz                           | Connectors configurable  |
| N7553A                               | ECal economy, 2-ports | 3.5 mm         | DC to 14 GHz                          | Connectors configurable  |
| N7554A                               | ECal economy, 2-ports | 3.5 mm         | DC to 18 GHz                          | Connectors configurable  |
| N7555A                               | ECal economy, 2-ports | 3.5 mm         | DC to 26.5 GHz                        | Connectors configurable  |
| <b>2.92 mm (same as K connector)</b> |                       |                |                                       |  |
| 85561A                               | 4-in-1 OSLT cal kit   | 2.92 mm (f)    | DC to 40 GHz                          | Open, short, fixed load, thru (all female)                         |
| 85562A                               | 4-in-1 OSLT cal kit   | 2.92 mm (m)    | DC to 40 GHz                          | Open, short, fixed load, thru (all male)                           |
| 85056KE01 <sup>3</sup>               | Standard cal kit      | 2.92 mm        | DC to 40 GHz                          | Open, short, fixed load, sliding load (both female and male)       |
| 85056KE02 <sup>4</sup>               | Economy cal kit       | 2.92 mm        | DC to 40 GHz                          | Open, short, fixed load (female and male)                          |
| N4692A <sup>2</sup>                  | ECal                  | 2.92 mm        | 10 MHz to 40 GHz                      | Connectors configurable  |
| N4692D                               | ECal                  | 2.92 mm        | 10 MHz to 40 GHz or DC to 40 GHz      | Connectors configurable  |
| <b>2.4 mm</b>                        |                       |                |                                       |  |
| 85563A                               | 3-in-1 OSL cal kit    | 2.4 mm (f)     | DC to 50 GHz                          | Open, short, fixed load (all female)                               |
| 85564A                               | 3-in-1 OSL cal kit    | 2.4 mm (m)     | DC to 50 GHz                          | Open, short, fixed load (all male)                                 |
| 85056D                               | Economy cal kit       | 2.4 mm         | DC to 50 GHz                          | Open, short, fixed load (female and male)                          |
| 85056A                               | Standard cal kit      | 2.4 mm         | DC to 50 GHz                          | Open, short, load, fixed load, sliding load (both female and male) |
| N4693A <sup>2</sup>                  | ECal                  | 2.4 mm         | 10 MHz to 50 GHz                      | Connectors configurable  |
| N4693D                               | ECal                  | 2.4 mm         | 10 MHz to 50 GHz or DC to 50 GHz      | Connectors configurable  |
| <b>1.85 mm</b>                       |                       |                |                                       |  |
| N4694D                               | ECal                  | 1.85 mm        | 10 MHz to 67 GHz or DC to 67 GHz      | Connectors configurable  |

1. Recommend ordering quantity 2 of N9910X Option 846, 50 to 75 Ω adapter.

2. Product is discontinued.

3. Same as Maury's 8770C47.

4. Same as Maury's 8770D47.

| Waveguide  | Description       | Connector  | Frequency range | Components                                 |
|------------|-------------------|------------|-----------------|--|
| N9911X-11x | N9911X-11x        | N9911X-11x | N9911X-11x      | N9911X-11x                                 |
| N9911X-21x | N9911X-21x        | N9911X-21x | N9911X-21x      | N9911X-21x                                 |
| N9911X-31x | N9911X-31x        | N9911X-31x | N9911X-31x      | N9911X-31x                                 |
| N9911X-41x | N9911X-41x        | N9911X-41x | N9911X-41x      | N9911X-41x                                 |
| X11644A    | X11644A           | X11644A    | X11644A         | X11644A                                    |
| P11644A    | Waveguide cal kit | WR-62      | 12.4 to 18 GHz  | Short, shim, termination, standard section |
| K11644A    | Waveguide cal kit | WR-42      | 18 to 26.5 GHz  | Short, shim, termination, standard section |

## Accessories

### Cables

All cables listed below are rugged phase-stable cables.

| Model      | Cable connector | Other cable connector | Max frequency | Length (ft) | Length (m) |
|------------|-----------------|-----------------------|---------------|-------------|------------|
| N9910X-700 | Type-N (m)      | Type-N (f)            | 18 GHz        | 3.28 ft     | 1 m        |
| N9910X-701 | Type-N (m)      | Type-N (m)            | 18 GHz        | 3.28 ft     | 1 m        |
| N9910X-704 | Type-N (m)      | TNC (f)               | 13 GHz        | 5 ft        | 1.5 m      |
| N9910X-705 | Type-N (m)      | TNC (m)               | 13 GHz        | 5 ft        | 1.5 m      |
| N9910X-708 | 3.5 mm (m)      | 3.5 mm (f)            | 26.5 GHz      | 3.28 ft     | 1 m        |
| N9910X-709 | 3.5 mm (f)      | 3.5 mm (f)            | 26.5 GHz      | 3.28 ft     | 1 m        |
| N9910X-714 | 2.4 mm (f)      | 2.4 mm (m)            | 50 GHz        | 3.28 ft     | 1 m        |
| N9910X-715 | 2.4 mm (f)      | 2.4 mm (f)            | 50 GHz        | 3.28 ft     | 1 m        |
| N9910X-716 | Type-N (m)      | Type-N (m)            | 18 GHz        | 2 ft        | 0.61 m     |
| N9910X-718 | 2.4 mm (f)      | K / 2.92 mm (m)       | 40 GHz        | 3 ft        | 0.914 m    |
| N9910X-810 | Type-N (m)      | Type-N (m)            | 8 GHz         | 5 ft        | 1.5 m      |
| N9910X-811 | Type-N (m)      | Type-N (f)            | 8 GHz         | 5 ft        | 1.5 m      |
| N9910X-812 | Type-N (m)      | Type-N (m)            | 8 GHz         | 12 ft       | 3.6 m      |
| N9910X-813 | Type-N (m)      | Type-N (f)            | 8 GHz         | 12 ft       | 3.6 m      |
| N9910X-814 | Type-N (m)      | 7/16 (m)              | 6 GHz         | 5 ft        | 1.5 m      |
| N9910X-815 | Type-N (m)      | 7/16 (m)              | 6 GHz         | 12 ft       | 3.6 m      |
| N9910X-816 | Type-N (m)      | Type-N (f)            | 6 GHz         | 3.28 ft     | 1 m        |
| N9910X-817 | Type-N (m)      | Type-N (m)            | 6 GHz         | 3.28 ft     | 1 m        |

### Preamplifiers

| Model  |                                       |  |
|--------|---------------------------------------|--|
| U7227A | USB preamplifier, 10 MHz to 4 GHz     | <a href="http://www.keysight.com/find/U7227A">www.keysight.com/find/U7227A</a> |
| U7227C | USB preamplifier, 100 MHz to 26.5 GHz | <a href="http://www.keysight.com/find/U7227C">www.keysight.com/find/U7227C</a> |
| U7227F | USB preamplifier, 2 to 50 GHz         | <a href="http://www.keysight.com/find/U7227F">www.keysight.com/find/U7227F</a> |
| U7228A | USB preamplifier, 10 MHz to 4 GHz     | <a href="http://www.keysight.com/find/U7228A">www.keysight.com/find/U7228A</a> |
| U7228C | USB preamplifier, 100 MHz to 26.5 GHz | <a href="http://www.keysight.com/find/U7228C">www.keysight.com/find/U7228C</a> |
| U7228F | USB preamplifier, 2 to 50 GHz         | <a href="http://www.keysight.com/find/U7228F">www.keysight.com/find/U7228F</a> |



## Noise sources

### Model

|                  |  |
|------------------|--|
| 346A/B/C/K01/K40 | 346 Series noise source family<br><a href="http://www.keysight.com/find/346noisesources">www.keysight.com/find/346noisesources</a> |
|------------------|--|

## Antennas

### Model

|                          |  |
|--------------------------|--|
| N9910X-820               | Antenna, directional, multiband, 800 to 2500 MHz, 10 dBi, Type-N (f) |
| N9910X-821               | Antenna, telescopic whip, 70 MHz to 1 GHz, BNC (m)                   |
| N9910X-822               | Antenna, directional, log periodic, 600 MHz to 9 GHz, Type-N (f)     |
| N9910XA-823 <sup>1</sup> | Antenna, cellular narrowband, 824 to 869 MHz, Type-N (f)             |
| N9910XA-824 <sup>1</sup> | Antenna, cellular narrowband, PCS 1850 to 1990 MHz, Type-N (f)       |
| N9910X-825               | Antenna, GPS, active, SMA (m)  |
| 85571A-028 <sup>1</sup>  | 5G Phased Array Antenna 28 GHz                                       |
| 85572A-006               | Triaxial Isotropic Antenna 30 MHz to 6 GHz                           |

## RF and microwave adaptors

### Model

|            |   |
|------------|---|
| 83059A     | Coaxial adapter, 3.5 mm (m) to 3.5 mm (m), 26.5 GHz   |
| 83059B     | Coaxial adapter, 3.5 mm (f) to 3.5 mm (f), 26.5 GHz   |
| 83059C     | Coaxial adapter, 3.5 mm (m) to 3.5 mm (f), 26.5 GHz   |
| N9910X-601 | Coaxial adapter, NMD 2.4 mm (f) to Type-N (f), 50-ohm, 18 GHz                                 |
| N9910X-602 | Coaxial adapter, NMD 2.4 mm (f) to 2.92 mm/K (f), 40 GHz                                      |
| N9910X-603 | Coaxial adapter, NMD 2.4 mm (f) to 3.5 mm (f), 26.5 GHz                                       |
| N9910X-604 | 3.5 mm NMD (f) to 3.5 mm (f) adapter, 26.5 GHz  |
| N9910X-605 | 3.5 mm NMD (f) to Type-N (f) adapter, 18 GHz  |
| N9910X-843 | Coaxial adapter, Type-N (m) to 7/16 DIN (f)   |
| N9910X-845 | Adapter kit: Type-N (f) to 7/16 DIN (f), Type-N (f) to 7/16 DIN (m), Type-N (f) to Type-N (f) |
| N9910X-846 | Coaxial adapter, Type-N (m) 50 ohm to Type-N (f) 75 ohm                                       |
| N9910X-847 | Adapter kit: Type-N (f) to TNC (m) adapter, Type-N (f) to TNC (f) adapter, 11 GHz             |
| N9910X-848 | Coaxial adapter, Type-N (f) to 3.5 mm (f), 18 GHz   |
| N9910X-849 | Coaxial adapter, Type-N (f) to 3.5 mm (m), 18 GHz   |
| N9910X-850 | Coaxial adapter, Type-N (m) to Type-N (m), 18 GHz   |
| N9910X-851 | Coaxial adapter, Type-N (f) to Type-N (f), 18 GHz   |
| N9910X-852 | Coaxial adapter, Type-N (m) to Type-N (f), 18 GHz   |
| N9910X-856 | Coaxial adapter, 2.4 mm (f) to 2.4 mm (f), 50 GHz   |
| N9910X-857 | Coaxial adapter, 2.4 mm (f) to 2.92 mm/K (f), 40 GHz  |

1. Currently is not RoHS-compliant.

### OML frequency extender modules

Purchase OML frequency extenders directly from OML, Inc. One mixer, OML model number **M28H2ADC-K** (24 to 40 GHz), has been set up as a Keysight special handling part number **N9910XM28-H2A** or **N9910XM28-H2N** and is available for sale directly through Keysight. Contact OML, Inc. directly ([www.omlinc.com](http://www.omlinc.com)) for pricing, ordering and datasheet information or contact a Keysight representative for assistance.

FieldFox operating modes that support frequency extenders include: Spectrum analyzer, real-time spectrum analyzer, I/Q analyzer, over-the-air (5G NR, LTE FDD/TDD, 5GTF), phased array antenna support and PathWave vector signal analysis software (formerly 89600 VSA).

| OML model number        | OML mixer frequency range | Frequency range with FieldFox models N9917/18/5xB and N9937/38/6xB | Frequency range with FieldFox models N9916/36B |
|-------------------------|---------------------------|--|--|
| M28H2ADC-K <sup>1</sup> | 24 to 40 GHz              | 24 to 40 GHz   | 24 to 34 GHz                                   |
| M15H4ADC                | 50 to 75 GHz              | 50 to 75 GHz   | 50 to 62 GHz                                   |
| M12H6ADC                | 60 to 90 GHz              | 60 to 90 GHz   | 60 to 90 GHz                                   |
| M10H6ADC                | 75 to 110 GHz             | 75 to 110 GHz  | 75 to 90 GHz                                   |

1. Not applicable to N9951/61B, N9952/62B, and N9953/63B models with maximum frequency coverage of 44, 50, and 54 GHz, respectively.

### OML frequency extender module adapter kits

OML frequency extender module adapter kits make for easier connection to FieldFox units with Type-N or 3.5 mm. Frequency extender adaptors work with OML frequency extender model number **M28H2ADC-K** (24 to 40 GHz), or Keysight special handling part number **N9910XM28-H2A** that is available for sale directly through Keysight. Alternatively, Keysight also offers a special handling part number **N9910XM28-H2N** that has Type-N (m) connectors for LO input and IF output. Users can connect the frequency extender directly to the FieldFox analyzer with Type-N test ports eliminating the need for adapters. Please see **N9910XM28** web page for more detailed information.

When ordering the OML frequency extender as Keysight model number **N9910XM28-H2A**, add the adapter kits shown below as Keysight model numbers **N9910XM28-AK1**, **-AK2**, **-AK3**, **-AK4** and **-AK5**.

When ordering the OML frequency extender as Keysight model number **N9910XM28-H2N**, add the adapter kits shown below as Keysight model numbers **N9910XM28-AK4**, **-AK5**, and **-AK6**. (Note **-AK1**, **-AK2**, and **-AK3** are intended for **N9910XM28-H2A** only)

| Model number  | Description   |
|---------------|---|
| N9910XM28-AK1 | Coaxial straight Male-N to Male-SMA, Qty 2 included, connects the mixer model N9910XM28-H2A, with SMA LO and IF connectors, directly to the FieldFox with Type-N ports, for example FieldFox Model N9917B. The new mixer Model N9910XM28-H2N has Type-N LO and IF connections for direct connection to the FieldFox N9917B. |
| N9910XM28-AK2 | Coaxial straight Female-SMA to Female-N, Qty 2 included, used as a spacer with N9910XM28-AK1 for FieldFox units with 3.5 mm ports when the GPS antenna is mounted vertically.   |
| N9910XM28-AK3 | Coaxial straight Male-SMA to Female-SMA, Qty 2 included, connects mixer directly to FieldFox with 3.5 mm ports. Required to provide space for the GPS Antenna when used with right angle adapter N9910XM28-AK4.   |
| N9910XM28-AK4 | Female-SMA to Male-SMA, Right Angle, Qty 1, included. For connecting GPS antenna at right angle and used for GPS antenna attachment with N9910XM28-AK1 or N9910XM28-AK3 adapter kits. Can also be used to provide a right-angle connection to Ref/Trig input.   |
| N9910XM28-AK5 | Waveguide horn antenna and mounting fixture.  |
| N9910XM28-AK6 | Type-N Male-Female adapter. Acts as a spacer to offset the mixer from the FieldFox to allow access to the Trig/Ref input connector which is blocked by the USB Mini connector when the N9910XM28-H2N is connected directly.   |

When ordering the OML frequency extender adapter kits separately (not added to an order with Keysight model number **N9910XM28-H2A** or **N9910XM28-H2N**), order the adapter kits shown above (**N9910XM28-AKx**) as the Keysight part numbers shown below.

| Part number | Description   |
|-------------|---|
| 1250-1636   | Coaxial straight Male-N to Male-SMA, order Qty 2, connects mixer directly to FieldFox with Type-N ports. See N9910XM28-AK1 complete description above.  |
| 1250-3968   | Coaxial straight Female-SMA to Female-N, order Qty 2, spacer for FieldFox units with 3.5 mm ports and used with (part number 1250-1636 adapter kit shown above) when GPS antenna is mounted vertically.                     |
| 1250-3851   | Coaxial straight Male-SMA to Female-SMA, order Qty 2, connects mixer directly to FieldFox with 3.5 mm ports.  |
| N0000-33203 | Female-SMA to Male-SMA, Right Angle, Qty 1, for connecting GPS antenna at right angle and used for GPS antenna attachment with (part number 1250-1636 or 1250-3851 adapter kits shown above).                               |
| 0950-6352   | Antenna and mounting fixture, 0.75-inch square flange plastic, Qty 1 included, to be used with 0955-3591 below.   |
| 0955-3591   | Waveguide horn antenna, pyramidal Ka-band 26.5 to 40 GHz WR-28, Qty 1 included, also order 0950-6352 above for mounting fixture.  |
| 85032-60020 | Type-N Male-Female adapter. Acts as a spacer to offset the mixer from the FieldFox to allow access to the Trig/Ref input connector which is blocked by the USB Mini connector when the N9910XM28-H2N is connected directly. |

## OML frequency extender module adapter kits

Other RF and microwave accessories

### Model

|                         |  |
|-------------------------|--|
| N9910X-860              | Fixed attenuator, 40 dB, 100 W, DC to 3 GHz, Type-N (m) to Type-N (f)  |
| N9910X-861              | Fixed attenuator, 40 dB, 50 W, DC to 8.5 GHz, Type-N (m) to Type-N (f) |
| N9910X-874 <sup>1</sup> | External bias-tee, 2.5 MHz to 6 GHz, 1 W, 0.5 A                        |
| N9910X-886              | Torque wrench, 17 mm, 90 N-cm (8 in-lb)                                |
| N9910X-712              | Trig/Ref in Cable SMA (m) to BNC (f), 1 m or 3.28 ft                   |
| N9910X-713              | Bias-tee power cable SMB (f) to BNC (m), 1 m or 3.28 ft                |

## Other FieldFox accessories

### Model

|            |   |
|------------|---|
| N9910X-876 | Extra high-capacity battery                               |
| N9910X-872 | External battery charger                                  |
| N9910X-873 | AC/DC adapter   |
| N9910X-875 | DC car charger and adapter                                |
| N9910X-880 | Extra soft carrying case with backpack and shoulder strap |
| N9910X-881 | Hard transit case   |
| N9910X-887 | Fan replacement kit                                       |











## Keysight power sensors supported with FieldFox (options 208, 302, or 330)





| Model number | USB or LAN | Sensor type      | Frequency and power range  |
|--------------|------------|------------------|--|
| U2000A       | USB        | Average          | 10 MHz to 18 GHz, -60 dBm to +20 dBm                                 |
| U2000B       | USB        | Average          | 10 MHz to 18 GHz, -30 dBm to +44 dBm                                 |
| U2000H       | USB        | Average          | 10 MHz to 18 GHz, -50 dBm to +30 dBm                                 |
| U2001A       | USB        | Average          | 10 MHz to 6 GHz, -60 dBm to +25 dBm                                  |
| U2001B       | USB        | Average          | 10 MHz to 6 GHz, -30 dBm to +44 dBm                                  |
| U2001H       | USB        | Average          | 10 MHz to 6 GHz, -50 dBm to +30 dBm                                  |
| U2002A       | USB        | Average          | 50 MHz to 24 GHz, -60 dBm to +20 dBm                                 |
| U2002H       | USB        | Average          | 50 MHz to 24 GHz, -50 dBm to +30 dBm                                 |
| U2004A       | USB        | Average          | 9 kHz to 6 GHz, -60 dBm to +20 dBm                                   |
| U2021XA      | USB        | Average and peak | 50 MHz to 18 GHz, -30 dBm to +20 dBm                                 |
| U2022XA      | USB        | Average and peak | 50 MHz to 40 GHz, -30 dBm to +20 dBm                                 |
| U2041XA      | USB        | Average          | 10 MHz to 6 GHz, -70 dBm to +26 dBm                                  |
| U2042XA      | USB        | Average and peak | 10 MHz to 6 GHz, -70 dBm to +26 dBm                                  |
| U2043XA      | USB        | Average          | 10 MHz to 18 GHz, -70 dBm to +26 dBm                                 |
| U2044XA      | USB        | Average and peak | 10 MHz to 18 GHz, -70 dBm to +26 dBm                                 |
| U2051XA      | USB        | Average          | 10 MHz to 6 GHz, -70 dBm to +26 dBm                                  |
| U2052XA      | USB        | Average          | 10 MHz to 18 GHz, -70 dBm to +26 dBm                                 |
| U2053XA      | USB        | Average          | 10 MHz to 33 GHz, -70 dBm to +26 dBm                                 |
| U2054XA      | USB        | Average          | 10 MHz to 40 GHz, -70 dBm to +20 dBm                                 |
| U2055XA      | USB        | Average          | 10 MHz to 50/53 GHz, -70 dBm to +20 dBm                              |
| U2056XA      | USB        | Average          | 10 MHz to 54 GHz, -70 dBm to +20 dBm (≤50 GHz), to +15 dBm (≤54 GHz) |

<sup>1</sup> Also recommend ordering N9910X-713 Bias-Tee Power Cable, SMB(f) to BNC(m), 3.28 ft., to connect to the FieldFox DC source.

Keysight power sensors supported with FieldFox (options 208, 302, or 330)

|         |     |                           |   |
|---------|-----|---------------------------|---|
| U2057XA | USB | Average                   | 10 MHz to 67 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz), to +10 dBm ( $\leq 67$ GHz) |
| U2061XA | USB | Average and peak          | 10 MHz to 6 GHz, -70 dBm to +26 dBm   |
| U2063XA | USB | Average and peak          | 10 MHz to 33 GHz, -70 dBm to +20 dBm  |
| U2064XA | USB | Average and peak          | 10 MHz to 40 GHz, -70 dBm to +20 dBm  |
| U2065XA | USB | Average and peak          | 10 MHz to 50/53 GHz, -70 dBm to +20 dBm   |
| U2066XA | USB | Average and peak          | 10 MHz to 54 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz)                              |
| U2067XA | USB | Average and peak          | 10 MHz to 67 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz), to +10 dBm ( $\leq 67$ GHz) |
| U8481A  | USB | Average                   | 10 MHz to 18 GHz, -35 dBm to +20 dBm  |
| U8485A  | USB | Average                   | 10 MHz to 33 GHz, -35 dBm to +20 dBm  |
| U8487A  | USB | Average                   | 10 MHz to 50 GHz, -35 dBm to +20 dBm  |
| U8488A  | USB | Average                   | 10 MHz to 67 GHz, -35 dBm to +20 dBm  |
| U8489A  | USB | Average                   | DC to 120 GHz, -35 dBm to +20 dBm   |
| L2051XA | LAN | Average                   | 10 MHz to 6 GHz, -70 dBm to +26 dBm   |
| L2052XA | LAN | Average                   | 10 MHz to 18 GHz, -70 dBm to +26 dBm  |
| L2053XA | LAN | Average                   | 10 MHz to 33 GHz, -70 dBm to +26 dBm  |
| L2054XA | LAN | Average                   | 10 MHz to 40 GHz, -70 dBm to +20 dBm  |
| L2055XA | LAN | Average                   | 10 MHz to 50/53 GHz, -70 dBm to +20 dBm   |
| L2056XA | LAN | Average                   | 10 MHz to 54 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz)                              |
| L2057XA | LAN | Average                   | 10 MHz to 67 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz), to +10 dBm ( $\leq 67$ GHz) |
| L2061XA | LAN | Average and peak          | 10 MHz to 6 GHz, -70 dBm to +26 dBm   |
| L2062XA | LAN | Average and peak          | 10 MHz to 18 GHz, -70 dBm to +26 dBm  |
| L2063XA | LAN | Average and peak          | 10 MHz to 33 GHz, -70 dBm to +26 dBm  |
| L2064XA | LAN | Average and peak          | 10 MHz to 40 GHz, -70 dBm to +20 dBm  |
| L2065XA | LAN | Average and peak          | 10 MHz to 50/53 GHz, -70 dBm to +20 dBm   |
| L2066XA | LAN | Average and peak          | 10 MHz to 54 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz)                              |
| L2067XA | LAN | Average and peak          | 10 MHz to 67 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz), to +10 dBm ( $\leq 67$ GHz) |
| L2065XT | LAN | Thermal Vacuum Compliance | 10 MHz to 53 GHz, -70 dBm to +20 dBm  |
| L2066XT | LAN | Thermal Vacuum Compliance | 10 MHz to 54 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz)                              |
| L2067XT | LAN | Thermal Vacuum Compliance | 10 MHz to 67 GHz, -70 dBm to +20 dBm ( $\leq 50$ GHz), to +15 dBm ( $\leq 54$ GHz), to +10 dBm ( $\leq 67$ GHz) |
| U2049XA | LAN | Average and peak          | 10 MHz to 33 GHz, -70 dBm to +20 dBm  |

| Description  | Accessory   |
|--|---|
| N9910X-701<br>Type-N (m) to Type-N (m)<br>cable, 3.28 ft |    |
| N9910X-708<br>3.5 mm (m) to 3.5 mm (f)<br>cable, 3.28 ft |    |
| N9910X-820<br>Antenna, directional                       |    |
| N9910XA-823<br>Antenna, cellular narrowband              |    |
| N9910X-822<br>Antenna, directional                       |    |
| N9910X-825<br>Antenna, GPS, active                       |   |
| N9910X-876<br>Extra high-capacity battery                |  |
| N9910X-872<br>External battery charger                   |  |
| N9910X-881<br>Hard transit case                          |  |
| N9910X-811<br>Type-N (m) to Type-N (f)<br>cable, 5 ft    |  |

| Description   | Accessory   |
|---|---|
| N9910X-812<br>Type-N (m) to Type-N (m) cable,<br>12 ft    |    |
| N9910X-816<br>Type-N (m) to Type-N (f) cable,<br>3.28 ft  |    |
| N9910X-821<br>Antenna, telescopic whip™                   |    |
| N9910X-848<br>Coaxial adapter, Type-N(f) to<br>3.5 mm (f) |    |
| N9910X-875<br>DC car charger and adapter                  |    |
| N9910X-873<br>AD/DC adapter                               |   |
| N9910X-874<br>External bias-tee                           |  |
| N4690B<br>2-port ECal, Type-N,<br>18 GHz                  |  |
| N9910X-800<br>3-in-1 OSL cal kit, Type-N (m),<br>6 GHz    |  |
| N9910X-801<br>3-in-1 OSL cal kit, Type-N (f),<br>6 GHz    |  |

| Description   | Accessory   |
|---|---|
| 85514A<br>4-in-1 OSLT cal kit, Type-N<br>(m) 9 GHz            |    |
| 85515A<br>4-in-1 OSLT cal kit, Type-N (f),<br>9 GHz           |    |
| 85518A<br>4-in-1 OSLT cal kit, Type-N<br>(m), 18 GHz          |    |
| 85519A<br>4-in-1 OSLT cal kit, Type-N (f),<br>18 GHz          |  |
| 85054D<br>Economy cal kit, Type-N,<br>18 GHz                  |  |
| 85572A-006<br>Triaxial Isotropic Antenna<br>(30 MHz to 6 GHz) |  |

| Description  | Accessory   |
|--|---|
| 85520A<br>4-in-1 OSLT cal kit, 3.5 mm (m),<br>26.5 GHz       |    |
| 85521A<br>4-in-1 OSLT cal kit, 3.5 mm (f),<br>26.5 GHz       |    |
| 85033D/E<br>3.5 mm cal kit, 9 GHz                            |    |
| 85052D<br>3.5 mm cal kit, 26.5 GHz                           |  |
| 85571A-028 <sup>1</sup><br>5G Phased Array Antenna<br>28 GHz |  |
| 85056D<br>2.4 mm cal kit, 50 GHz                             |  |

1. This product is currently not RoHS-compliant.



| Description  | Accessory   |
|--|---|
| N9911X-211/212/213/214<br>WR-90 economical cal kit     |    |
| N4692A <sup>1</sup><br>2.92 mm, 2-port ECal,<br>40 GHz |    |
| N4691D<br>3.5 mm, 2-port ECal, 26.5 GHz                |    |
| N4693D<br>2.4 mm, 2-port ECal, 50 GHz                  |   |
| X11644A<br>WR-90 standard cal kit                      |  |

| Description  | Accessory  |
|--|--|
| N4691B <sup>1</sup><br>3.5 mm, 2-port ECal, 26.5 GHz |   |
| N4693A <sup>1</sup><br>2.4 mm 2-port ECal, 50 GHz    |   |
| N4692D<br>2.92 mm, 2-port ECal,<br>40 GHz            |   |
| N4694D<br>1.85 mm, 2-port ECal, 67 GHz               |  |

1. Product is discontinued.

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

