


# Jitter and Eye-diagram Analysis Solution

## DPOJET datasheet

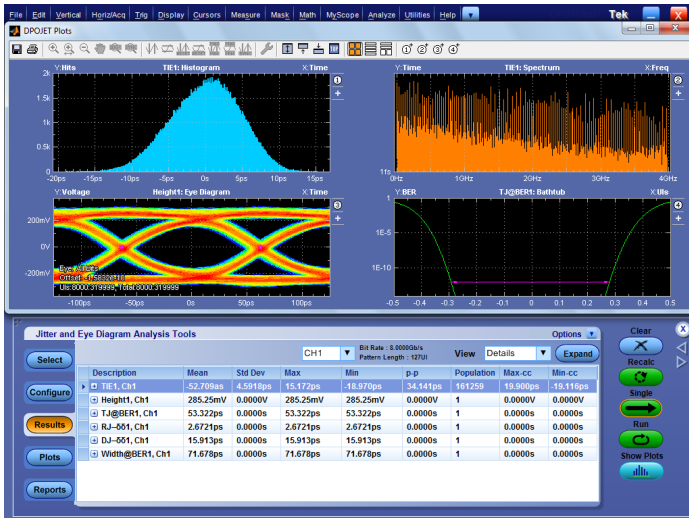

DPOJET is the premiere eye-diagram, jitter, and timing analysis package available for real-time oscilloscopes. DPOJET provides the highest sensitivity and accuracy available in real-time instruments. With comprehensive jitter and eye-diagram analysis and decomposition algorithms DPOJET simplifies discovering signal integrity concerns and jitter and their related sources in today's high-speed serial, digital, and communication system designs.

### Key features DPOJET Advanced

- Jitter and Timing Analysis for analog and digital clocks and data signals
- Real-time Eye-diagram (RT-Eye®) Analysis <sup>1</sup>
- Selectable high- and low-pass measurement filters
- Ten plot types to view and analyze jitter: Eye Diagram, CDF Bathtub, Spectrum, Histogram, Composite Histogram, Trend, Data, Phase Noise, and Transfer Function
- Accurate jitter analysis using the spectral and Q-scale methods for detailed decomposition of jitter components, including the extraction of industry standard dual-dirac model parameters
- Jitter separation algorithms accurately measure the effects of bounded uncorrelated jitter (BUJ) which enables precise TJ measurements

<sup>1</sup> Patented USPTO #6,836,738

<sup>2</sup> Patented USPTO #6,812,688.

- Full pass/fail limits and mask testing with comprehensive standards support library; plus user limit and mask files allow support of custom test configurations and new or developing standards
- DPOJET Advanced is standard on DSA/MSO70000 Series, optional on DPO70000, DPO7000, and MSO/DPO5000 Series oscilloscopes

### Key features DPOJET Essentials-Advanced

- Period, frequency, and time interval error analysis
- Timing parametrics such as rise/fall times, pulse width, and duty cycle
- Many graphical tools such as Histograms, Time Trends, and Spectrums
- Programmable software clock recovery including software PLL <sup>2</sup>
- User-selectable golden PLL support for popular standards
- Automatic bit rate and pattern length detection eases measurement configuration
- Selectable high- and low-limit measurement bounds test
- Comprehensive statistics logging, reporting, and remote automation
- Capture and save worst-case signals for detailed analysis
- TekWizard™ interface for one-button and guided jitter summaries
- DPOJET Essentials is standard on all DPO/DSA/MSO70000, DPO7000, and MSO/DPO5000 Series oscilloscopes

### Applications

- Characterize performance of high-speed serial and parallel bus designs
- Characterize clock and data jitter and signal integrity
- Characterize PLL dynamic performance
- Characterize modulation of spread spectrum clock circuits
- Characterize jitter generation, transfer, and tolerance
- Perform PHY testing of PCI Express, Serial ATA, SAS, Fibre Channel, MIPI® D-PHY, MIPI® M-PHY, DisplayPort, Thunderbolt, MHL, DDR, DDR2, DDR3, LPDDR, LPDDR2, SD UHS-II, MOST50, MOST150, USB 3.0, 10GBASE-KR/KR4, SFF-8431 SFP+ / 10GSFP+ Direct Attach Cable, and other electrical and optical systems

## Realtime jitter and eye-diagram analysis

DPOJET is the premiere eye-diagram, jitter, and timing analysis package available for real-time oscilloscopes. Operating in the Tektronix DPO/DSA/MSO70000, DPO7000, and MSO/DPO5000 Series oscilloscopes, DPOJET provides engineers the highest sensitivity and accuracy available in real-time instruments. With comprehensive jitter and eye-diagram analysis and decomposition algorithms DPOJET simplifies discovering signal integrity concerns and jitter and their related sources in today's high-speed serial, digital, and communication system designs.

Analog and digital designers in the computer, semiconductor, and communications industries are facing new challenges as processor clock speeds race beyond 3 GHz and back-plane bus and serial link data rates exceed 8 GT/s. These increasing speeds mean reduced circuit tolerance, or margin, for jitter and related signal integrity problems. By using tools that help you rapidly characterize and discover sources of jitter and signal integrity concerns, you can bring new designs to market faster, with more confidence that they operate reliably in today's ultra high-speed environment.

### Partial list of measurements

Measurement	DPOJET Essentials	DPOJET Advanced
Period/Frequency Measurements		
Frequency <sup>3</sup> , Period <sup>3</sup> , N-Period, Cycle-Cycle Period, Positive Width <sup>3</sup> , Negative Width <sup>3</sup> , Positive Duty Cycle <sup>3</sup> , Negative Duty Cycle <sup>3</sup> , Positive Cycle-Cycle Duty <sup>3</sup> , Negative Cycle-Cycle Duty <sup>3</sup>	X	X
Time Measurements		
Rise Time, Fall Time, Skew <sup>3</sup> , High Time, Low Time, Setup <sup>3</sup> , Hold <sup>3</sup> , SSC Profile, SSC Modulation Rate, SSC Frequency Deviation, SSC Frequency Deviation Min, SSC Frequency Deviation Max, Time Outside Level, tCMD-CMD	X	X
Rise Slew Rate, Fall Slew Rate		X
Amplitude Measurements		
High, Low, High-Low, AC Common Mode, DC Common Mode, Overshoot, Undershoot, Cycle Min, Cycle Max, Cycle Pk-Pk, Common Mode, T/nT Ratio, Differential Crossover		X
Jitter Measurements		
TIE, Phase Noise	X	X
RJ, DJ, TJ @ BER, PJ, Clock NPJ, DCD, DDJ, RJ( $\delta$ - $\delta$ ), DJ( $\delta$ - $\delta$ ), J2, J9, Subrate, F/2, F/4, F/8		X
Eye-diagram Measurements		
Eye Height, Eye Height @ BER, Eye Width, Eye Width @ BER, Eye High, Eye Low, Q-Factor, Mask Hits, Autofit Mask Hits		X
Clock Recovery Methods		

<sup>3</sup> Available on MSO digital channels

Constant Clock Mean, Constant Clock Median, Constant Clock Fixed, Explicit Clock Edge, Explicit Clock PLL, Type I PLL, Type II PLL	X	X
Plots		
Histogram, Time Trend, Data Array, Spectrum, Phase Noise, Phase Noise, Transfer Curve	X	X
Eye Diagram, Waveform Database, Bathtub, Composite Histogram		X
Limit and Mask Testing		
Pass/Fail Measurement Test Limits, Load and Test to Standard Masks		X
Data Logging		
Measurements, Statistics, Worst-case Waveform, and Snapshots	X	X
Report Generation		
Export HTML Formatted Reports with Summary, Statistics, and Plots	X	X
Pass/Fail Status		X

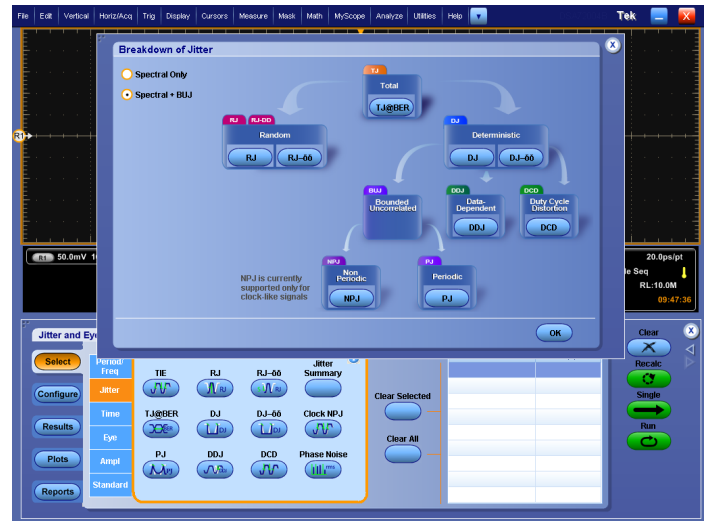


Figure 1 – DPOJET Jitter Separation selection for legacy or BUJ model

DPOJET Jitter and Eye-diagram Analysis Tools extend the capability of Tektronix real-time oscilloscopes, performing complex measurements and analysis of clock, serial, and parallel data signals captured in Single-shot Acquisition mode or in Continuous-run Acquisition mode. Measurements in DPOJET are supported on either analog or digital channels as shown in the measurement table above. Providing jitter and timing measurements with pass/fail parameter testing, and eye diagrams with mask testing for today's most common industry standards, DPOJET is specifically designed to meet the advanced measurement needs of today's high-speed digital designers in the computer and communications industries.

As data rates increase, next generation interfaces present new test and measurement challenges, including the need to measure and isolate sources of BUJ (for example crosstalk). Crosstalk can be caused due to the coupling of energy on the lane under test from adjacent lanes.

While Receiver and Transmitter Equalization can compensate for data dependent jitter (DDJ), crosstalk effects are difficult to remove. This has resulted in many standards, for example Thunderbolt, including BUJ in the jitter budget making BUJ a required measurement.

DPOJET provides support for both legacy and BUJ jitter separation algorithms as shown in Figure 1. When using the BUJ Jitter Decomposition method, the Clock NPJ measurement is available in the Jitter tab within DPOJET.

### Debug, Characterization, and Compliance

DPOJET is the only Jitter and Eye Analysis software that enables multi-source analysis with configuration flexibility on a measurement by measurement basis providing the ultimate debug, characterization, and compliance environment.

### Multi-Lane Analysis


With other jitter and eye analysis software solutions, analyzing multiple lanes is a painstaking process requiring multiple acquisitions to analyze each lane individually. DPOJET provides the capability to perform multiple measurements simultaneously on multiple sources, for example Ch1, Ch2, Ch3, and Ch4 enabling multi-lane analysis. Multiple lanes of traffic can be measured simultaneously allowing faster analysis and easy comparison of results for multi-lane standards including PCI Express, HDMI, and DisplayPort. This makes it easy to do visual comparison between the lanes and quickly note differences in signal quality parameters, for example noise, jitter, rise time, fall time, and amplitude between the lanes. Also available is DPOJET Reports which allows the generation of a html report which contains instrument and measurement configuration details, measurement results, and plots.



Simultaneous analysis of a four lane DisplayPort device.

### Multi-Source Analysis


Building upon the ability to perform the same measurement simultaneously multiple times, DPOJET provides an environment that is well suited for analyzing the effects of post-processing actions, for example de-embedding, embedding, and equalization. Together with SDLA Visualizer, DPOJET provides the analysis environment which allows simultaneous measurements on the signal and different test points within the link. For example, a comparison between the acquired waveform and the waveform after de-embedding can be quickly done providing the details needed to validate the effects of de-embedding on the acquired signal.

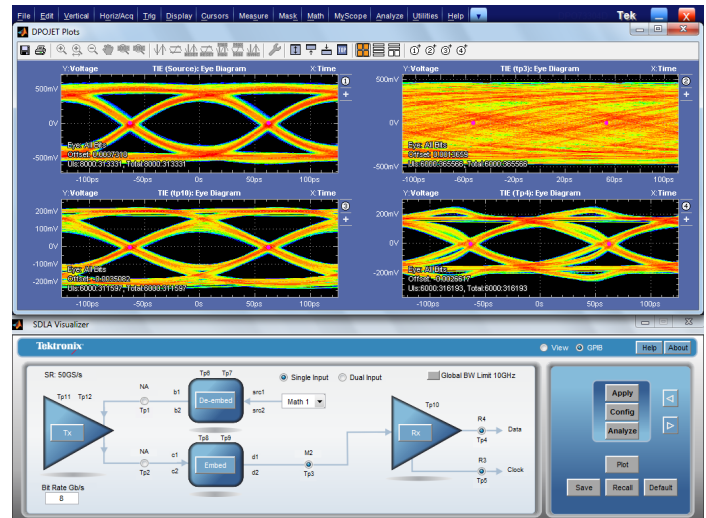

Analysis of a PCI Express Gen 3 signal after channel embedding, CTLE, and DFE using SDLA Visualizer and DPOJET.

### Multi-Measurement Configuration

Most high speed serial standards specify a reference phased locked loop (PLL) to use for clock recovery. This ensures that during the testing process that devices are all tested to the same standard. These PLLs are defined to filter or track the effects of low frequency jitter such as jitter due to Spread Spectrum Clocking (SSC). When using a PLL configuration that can track SSC, the SSC is attenuated and the result is a more open eye diagram. Typically, a 2<sup>nd</sup> order PLL is used to track the effects of SSC due to the ability to attenuate low frequency jitter. In cases where it is desired to see the effects of SSC constant clock recovery can be used which will not track the effects of SSC. Oftentimes, it is desired to see the effects of jitter, like SSC while at the same time evaluating the eye after using the reference PLL. This can quickly be done using the flexible measurement configuration feature in DPOJET. Measurements can be configured to all use the same clock recovery technique or individual measurements can be configured using different clock recovery methods.

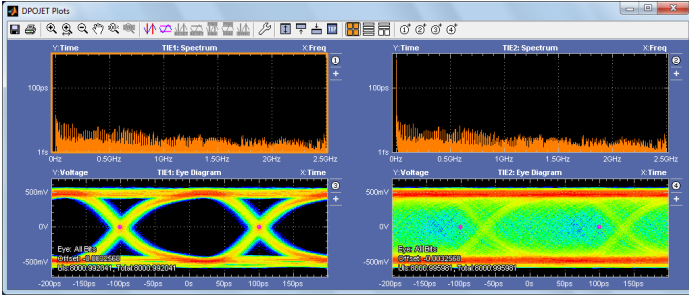

Analysis of a USB 3 signal showing the differences between using a Type II PLL (left side) to attenuate low frequency jitter and Constant Clock Recovery (right side).


In other cases, it is desired to see the results in the frequency domain. DPOJET provides a spectral plot which shows the spectral content of the signal after clock recovery. The spectral content of the signal can quickly be compared after applying a 2<sup>nd</sup> order pll versus using constant clock recovery as shown in the image above.

### Data Visualization


DPOJET supports displaying measurement results and plots on the internal display, on an external monitor, or both locations, thus making full use of the oscilloscope dual display ports.

DPOJET provides a rich set of interactive plots that enable analysis beyond what is possible with static plot images. Interactive features include zoom, pan, cursors, and finding the min and max values. For example, when looking at the spectral plot it is easy to find the frequency with the highest amplitude by using the Max cursor feature. The plot readout will then show the frequency and the amplitude of jitter.

DPOJET analysis plots, like Spectrum and Trend, go beyond simple measurements and results display. Trend analysis quickly shows engineers how timing parameters change over time, like frequency drift, PLL startup transients, or a circuit's response to power supply changes. Spectrum analysis quickly shows the precise frequency and amplitude of jitter and modulation sources for easy, rapid identification. Finding sources like adjacent oscillators and clocks, power supply noise, or signal crosstalk is no longer a tedious chore. Unique in the industry, DPOJET also provides Phase Noise plots to show jitter in root/Hertz and Transfer Function plots that allow direct comparison of jitter spectrums between two signals of differing frequencies, providing the perfect tool for determining jitter in PLL circuits like clock multipliers. The composite histogram plot shows further details into the jitter components and their distribution in the data set.

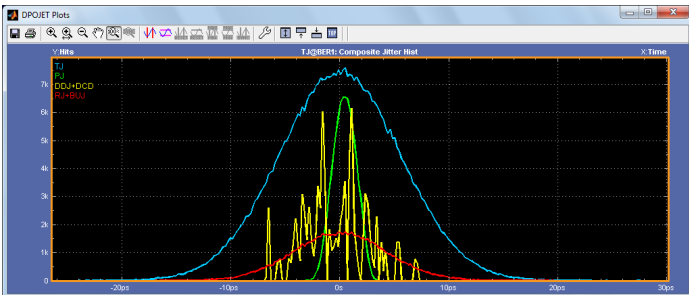


Composite histogram plot.

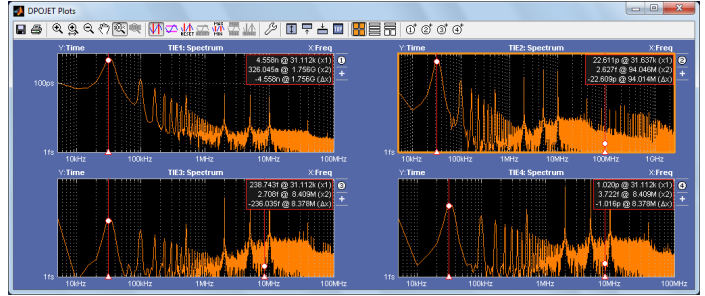

DPOJET Spectral Plots showing the effects on different clock recovery schemes on the amplitude of low frequency jitter.

Once all measurements are completed, the user has the flexibility to generate a test report which includes the instrument configuration, probe configuration, measurement results with pass fail status, measurement configuration details, and any plots that were generated. Alternatively, the user also has the flexibility to generate a .csv file that contains the results.

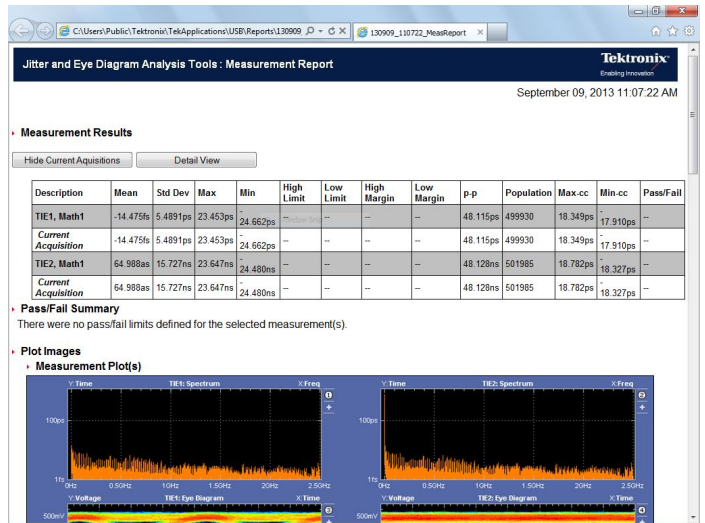

Example DPOJET Test Report showing measurement results and plots.

## Ordering information

### Model

DPOJET Advanced

### Options

Opt. DJA Order preinstalled on a new oscilloscope

### Upgrades

Order an upgrade for existing oscilloscope:

DPO-UP Opt. DJAE	MSO/DPO5000 Series
DPO-UP Opt. DJAM	DPO7000 Series
DPO-UP Opt. DJAH	DPO/MSO70000 Series, 4-8 GHz
DPO-UP Opt. DJAU	DPO/MSO70000 Series, >12 GHz
DPOFL-DJA	Floating License

### Physical characteristics

Software is supplied on internal hard disk and on compact disk media, or can be downloaded from [www.tektronix.com](http://www.tektronix.com). Software installs and operates with DPO/DSA/MSO70000, DPO7000, or MSO/DPO5000 Series oscilloscopes. Online documentation and printable manual in PDF format are supplied with the product.

### Recommended accessories

Opt. 10G-KR	Ethernet 10GBASE-KR/KR4 Compliance and Debug Solution
Opt. D-PHY	MIPI® D-PHY Essentials
Opt. DDRA	DDR Memory Bus Analysis
Opt. eDP	Embedded DisplayPort Essentials
Opt. FC-16G	Fibrechannel Essentials
Opt. MOST	MOST Essentials Electrical Compliance and Debug Test Solution for MOST50
Opt. M-PHY	MIPI® M-PHY Essentials
Opt. PCE	PCI Express® Measurements for DPOJET
Opt. PCE3	PCI Express Gen 3 (includes opt. PCE) Measurements for DPOJET
Opt. SAS3	SAS Essentials
Opt. SFP-TX	Ethernet SFP+ Compliance and Debug Solution
Opt. SSP	SuperSpeed Plus Essentials
Opt. UHS2	SDA UHS-II DPOJET Essentials
Opt. USB3	USB 3.0 Tx Essentials. Requires Opt. DJA and ≥8 GHz oscilloscope.

# Datasheet



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

**ASEAN / Australasia** (65) 6356 3900  
**Belgium** 00800 2255 4835\*  
**Central East Europe and the Baltics** +41 52 675 3777  
**Finland** +41 52 675 3777  
**Hong Kong** 400 820 5835  
**Japan** 81 (3) 6714 3010  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**People's Republic of China** 400 820 5835  
**Republic of Korea** 001 800 8255 2835  
**Spain** 00800 2255 4835\*  
**Taiwan** 886 (2) 2722 9622

**Austria** 00800 2255 4835\*  
**Brazil** +55 (11) 3759 7627  
**Central Europe & Greece** +41 52 675 3777  
**France** 00800 2255 4835\*  
**India** 000 800 650 1835  
**Luxembourg** +41 52 675 3777  
**The Netherlands** 00800 2255 4835\*  
**Poland** +41 52 675 3777  
**Russia & CIS** +7 (495) 6647564  
**Sweden** 00800 2255 4835\*  
**United Kingdom & Ireland** 00800 2255 4835\*

**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Canada** 1 800 833 9200  
**Denmark** +45 80 88 1401  
**Germany** 00800 2255 4835\*  
**Italy** 00800 2255 4835\*  
**Mexico, Central/South America & Caribbean** 52 (55) 56 04 50 90  
**Norway** 800 16098  
**Portugal** 80 08 12370  
**South Africa** +41 52 675 3777  
**Switzerland** 00800 2255 4835\*  
**USA** 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 April 2013

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tektronix.com](http://www.tektronix.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



11 Dec 2013

61W-21170-11

[www.tektronix.com](http://www.tektronix.com)

**Tektronix**<sup>®</sup>

