



I²C and SPI Protocol Triggering and Decode for Infiniium 9000 Series Oscilloscopes

Data sheet



This application is available in the following license variations.

- Order N5391B for a user-installed license
- Order Option 007 for a factory-installed license with new 9000 Series oscilloscopes
- Order N5435A Option 006 for a server-based license



Agilent Technologies

Easily debug and test designs that include I²C or SPI protocols using your Infiniium 9000 scope

Lower-speed serial bus interfaces such as I²C (inter-integrated circuit) and SPI (serial peripheral interface) are widely used today in electronic designs for chip-to-chip communication. In many designs these serial buses tend to provide content-rich points for debug and test. However, since these protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort, can't be done in real-time, and includes potential for human error. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions.


Extend your scope capability with I²C and SPI Triggering and Decode application. This application makes it easy to debug and test designs that include I²C or SPI protocols using your Infiniium 9000 scope.

- Set up your scope to show I²C or SPI protocol decode in less than 30 seconds.
- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.




Easy to find

Turn decode on/off via the "Serial Decode" button on the front of the instrument or in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5).

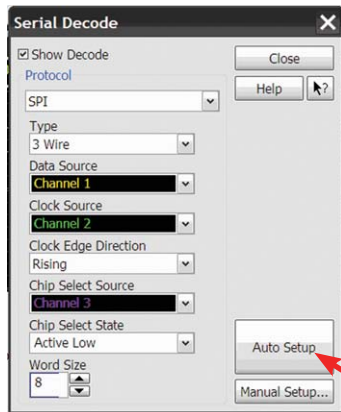

30 Second SPI or I²C Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

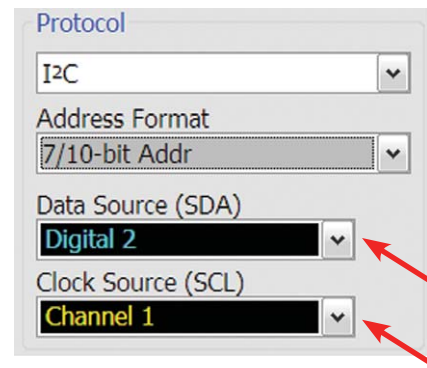


Support for both analog and digital channels

Acquire serial buses using any combination of scope or digital channels. Using digital channels on MSO models preserves analog channels for viewing other time-correlated signals.

I²C and SPI protocol triggering and searching


Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to I²C and SPI. When serial triggering is selected, the application enables special real-time triggering hardware inside the scope.

Hardware-based triggering ensures that the scope never misses a trigger event when armed. This hardware takes signals acquired using either scope or digital channels and reconstructs protocol frames. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

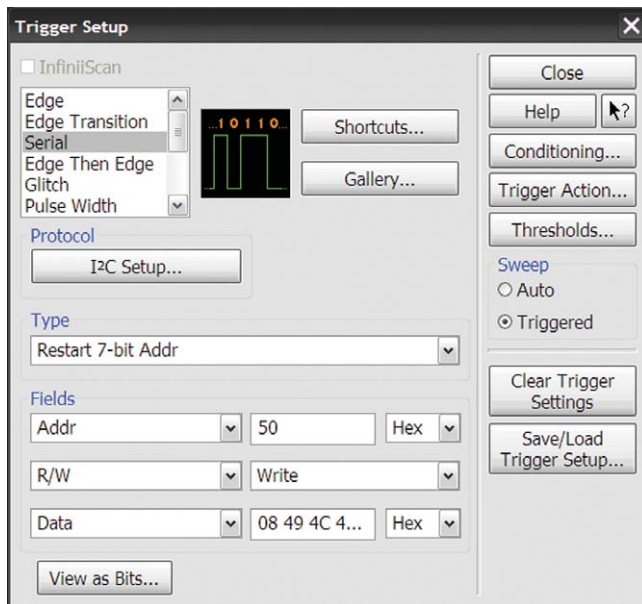

I²C Trigger Setup

Choose a combination of address, read/write, address acknowledge and data values for I²C triggers.

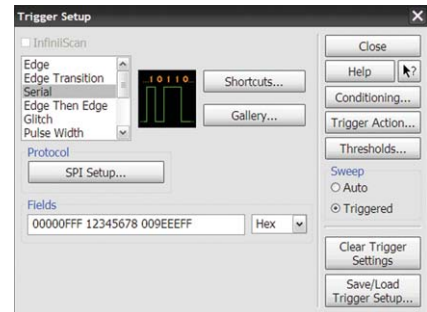


SPI Trigger Setup

Quickly access protocol triggering via the scope's trigger menu. Specify SPI trigger in HEX, binary, or decimal up to 200 bits.




Payload editor

Use the payload editor to specify data values word by word. Operators give additional triggering flexibility.

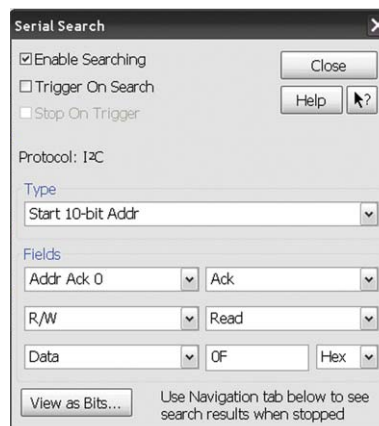

Post-acquisition searching


Search acquired protocol listing using a menu that is identical to the trigger menu.

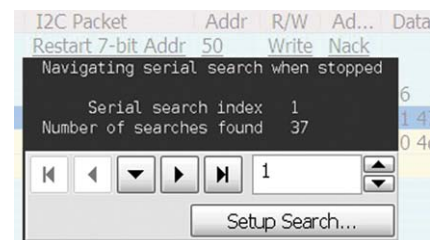

Quickly find occurrences

Quickly move to next occurrence of a specified event. Jump to the next or previous occurrence of the specified event.

SPI protocol decode

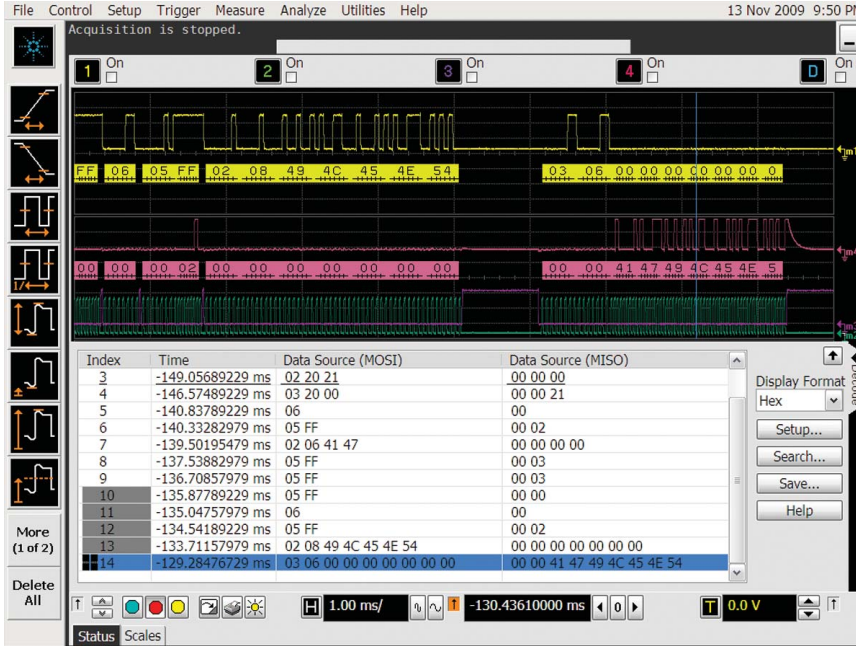

Protocol

SPI

Type

- 4 Wire
- 2 Wire
- 3 Wire
- 4 Wire

Support for 2, 3, and 4-Wire SPI

The application supports 2-, 3-, and 4-wire SPI. Use digital channels on MSO models to preserve analog channels for simultaneously viewing other signals.


SPI protocol decode with precise time-correlation between waveforms and listing

Agilent's SPI protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.



SPI decode embedded in waveform area

Utilize the oscilloscope waveform area to display decode information. For SPI, minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet.

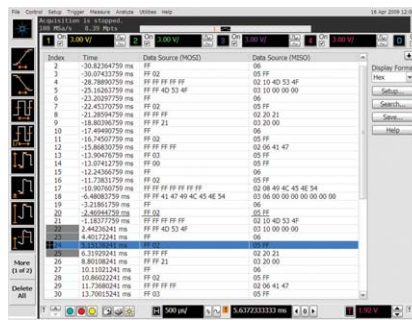

Full screen SPI listing

Fill the entire display with compact protocol information using the full screen listing. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.

Analog Samples/Segment Segmented Memory

Automatic

Manual

512.000 kpts

of Segments

1024

Segments acquired 1024

Time tag 440.92739910 s



1024

Play Play Rate: 100 ms

Long Time Captures using Segmented Memory


Capture seconds to days of serial protocol. The scope fills memory as each acquisition sees its trigger condition. Segmented memory uses time tags to track time between segment acquisitions.

I²C protocol decode

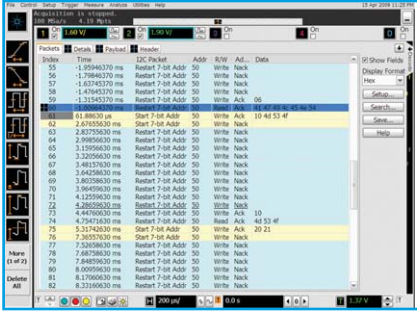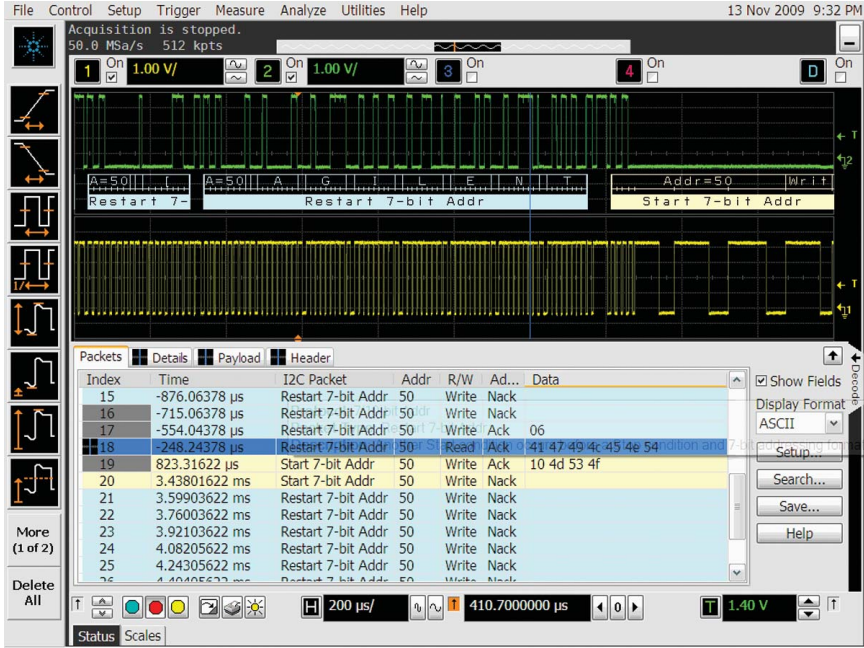


Fill the entire display with compact protocol information. The protocol viewer shows index number, time stamp, and data content for each serial packet. Listing content can be saved to a .csv or .txt file for off-line analysis or documentation. Use search capability to quick navigate through an acquisition.


Quickly move between physical and I²C protocol layer information using the time-correlated tracing marker. Display protocol content using embedded decode in the waveform area. Or, see protocol events in a compact listing format using the industry's first scope based multi-tab protocol viewer. For I²C minor tick marks indicate clock transitions. Major tick marks indicate sections of the serial packet such as address, acknowledge, and data.

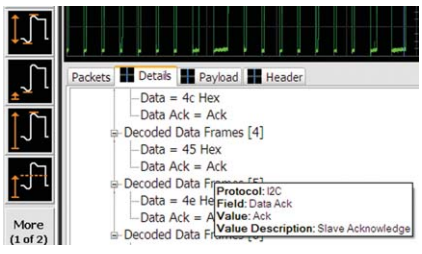

Details tab breaks the packets into easy-to-read textual fields. Hovering shows additional detail.

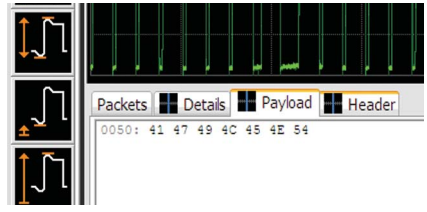

Payload tab shows data carried by the packet in byte-by-byte HEX and ASCII.

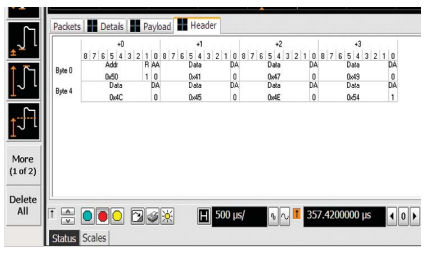

Header tab shows packets in a data book format. Hovering at any field reveals additional detail.

I²C specifications and characteristics

I ² C source (clock and data)	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15 any waveform memory
Max clock/data rate	Any waveform memory up to 3.4 Mbps (automatic)
Auto Setup	Automatically configures scope settings for proper I ² C decode and protocol triggering
Triggering	Start and re-start 7-bit address Start and re-start 8-bit address Start and re-start 10-bit address Start and re-start 11-bit address Specify value for 3 fields choosing between the following Read or write Address (value in HEX or binary) Address acknowledge Data (up to 20 bytes (specify in HEX, binary, ASCII, or decimal) Operators include: = on 8-bit word boundaries.


SPI specifications and characteristics

SPI protocols supported	2-wire SPI signals: data source and clock source 3-wire SPI signals: data source, clock source, and chip select source 4-wire SPI signals: data source (MOSI), clock source, chip select source, data source (MISO)
SPI source (all signals)	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15
Max clock/data rate	Up to 50 Mbps (automatic)
Autoset	Automatically configures scope settings for proper SPI decode and protocol triggering
Decode word size	User-selectable from 4 to 32 bits
Decode bit order	User-selectable LSB or MSB
Triggering	Data length up to 200 bits Number of words * word size < 200 bits Number of words selectable up to 50 Word size selectable from 4 to 32 bits Data operators include: =, OR

Ordering information

This application is compatible with all 9000 Series oscilloscope models.

Software applications	Factory-installed node-locked license for new scope purchases	User-installed node-locked license	Server-based license (N5435A option)
I ² C/SPI triggering and decode	007	N5391B	006

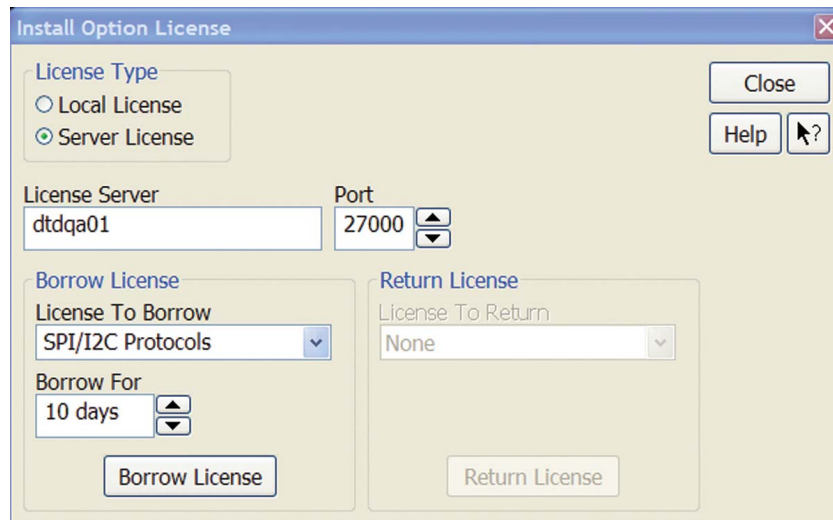

Sharing the application across multiple instruments? Server-based licensing allows users to borrow an application license for a specified period of time.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



www.lxistandard.org

LXI is the LAN-based successor to GPIB, providing faster, more efficient connectivity. Agilent is a founding member of the LXI consortium.

Windows® is a U.S. registered trademark of Microsoft Corporation.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

www.agilent.com

www.agilent.com/find/9000_I2C-SPI

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008


Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201
Other European Countries:	

Product specifications and descriptions in this document subject to change without notice.

October 1, 2009

© Agilent Technologies, Inc. 2009
Printed in USA, December 8, 2009
5990-3925EN

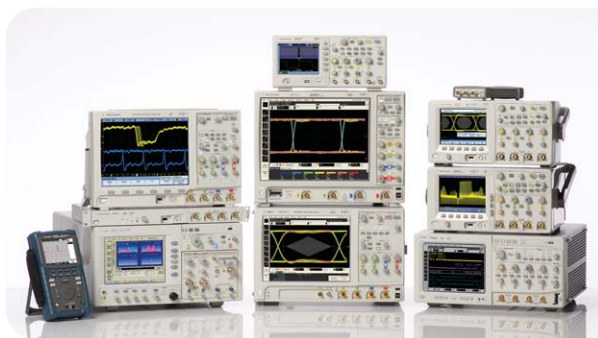

Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications



Agilent Technologies