

# EXTRACTION TOOL

**W-HT-2285**



This tool is designed to extract Standard .062" Pin and Socket Crimp Terminals from the connectors



## SPECIFICATIONS

O.D. ~ (0 .099 to 0.105)", Length: 4.75",  
Weight: 1.3oz., Brass Handle - Green

Harmonized Tariff Cd: 8203.40.6000


Country of Origin: US

Use with .062" Diameter Terminals. This is the Deluxe version of the W-HT-2023 tool.

Extracts .062" pins from housings designed to extract Male and Female Terminals from Housings (Plug and Receptacle) with smoothness and ease without damage.

Push the terminal forward before using the Tool. The Locking Tabs on the terminal must be depressed by the Retractable Spring Loaded Tube before it contacts the solid Terminal Push out pin. This pushes the terminal back through the hole as the retractable tube recedes into the handle.

Always re-spread the locking tabs when reinserting the same terminal.

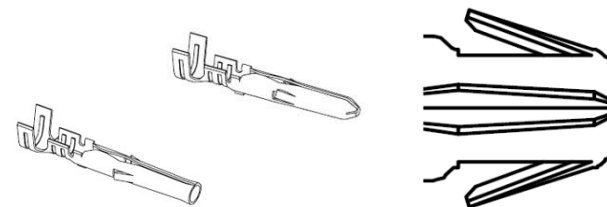

|       | <u>P/N #</u> | <u>Series:</u> |
|-------|--------------|----------------|
| Reel  | 02-06-2101   | 1560           |
| Loose | 02-06-2103   | 1560           |
| Reel  | 02-06-6100   | 1560           |
| Loose | 02-06-6103   | 1560           |
| Reel  | 02-06-6101   | 1560           |
| Loose | 02-06-6102   | 1560           |
| Loose | 02-06-6104   | 1560           |
| Reel  | 02-06-6105   | 1560           |
| Reel  | 02-06-6118   | 1560           |
| Loose | 02-06-6119   | 1560           |
| Reel  | 39-00-0278   | 1560           |
| Loose | 39-00-0327   | 1560           |
| Reel  | 02-06-1101   | 1561           |
| Loose | 02-06-1103   | 1561           |
| Reel  | 02-06-1118   | 1561           |
| Reel  | 02-06-5100   | 1561           |
| Loose | 02-06-5103   | 1561           |
| Reel  | 02-06-5101   | 1561           |
| Loose | 02-06-5102   | 1561           |
| Loose | 02-06-5104   | 1561           |
| Reel  | 02-06-5105   | 1561           |
| Reel  | 02-06-5108   | 1561           |
| Loose | 02-06-5109   | 1561           |
| Reel  | 39-00-0279   | 1561           |
| Loose | 39-00-0331   | 1561           |
| Loose | 39-00-0334   | 1561           |

|       | <u>P/N #</u> | <u>Series:</u> |
|-------|--------------|----------------|
| Loose | 02-06-6122   | 1778           |
| Loose | 02-06-8103   | 1778           |
| Loose | 02-06-8104   | 1778           |
| Loose | 02-06-7103   | 1779           |
| Loose | 02-06-7104   | 1779           |
| Reel  | 02-06-2131   | 1854           |
| Loose | 02-06-2132   | 1854           |
| Reel  | 02-06-6130   | 1854           |
| Loose | 02-06-6135   | 1854           |
| Reel  | 02-06-6138   | 1854           |
| Loose | 02-06-6139   | 1854           |
| Reel  | 02-06-6143   | 1854           |
| Loose | 02-06-6144   | 1854           |
| Loose | 39-00-0335   | 1854           |
| Reel  | 02-06-1131   | 1855           |
| Loose | 02-06-1132   | 1855           |
| Reel  | 02-06-1141   | 1855           |
| Reel  | 02-06-1143   | 1855           |
| Reel  | 02-06-5130   | 1855           |
| Loose | 02-06-5135   | 1855           |
| Reel  | 02-06-5138   | 1855           |
| Loose | 02-06-5139   | 1855           |
| Reel  | 02-06-5147   | 1855           |
| Loose | 02-06-5148   | 1855           |
| Loose | 39-00-0339   | 1855           |
| Reel  | 02-06-1104   | 4529           |