

JBC

www.jbctools.com

INSTRUCTION MANUAL



DS360


Micro Desoldering Iron

This manual corresponds to the following reference:

- DS360-A

Packing List

The following items are included:



Micro Desoldering Iron 1 unit
Tip Ref. C360004 already inserted

Manual 1 unit
 Ref. 0028149

DS360 Accessories Ref. 0010259

<p>Tips 10 units Ref. C360002 (x5) C360004 (x5)</p>	<p>Union Flanges 2 units Ref. 0011356</p>	<p>Filter 2 units Ref. 0008473</p>
<p>Cleaning Brush 1 unit Ref. 0008297</p>	<p>Solder Collector 2 units Ref. 0008467</p>	<p>Cleaning Rods 1 unit Ref. 0008466</p>

Connection


Micro Desoldering Iron Ref. DS360-A



Desoldering process


When desoldering, use a tip with a diameter larger than the pad being desoldered. This will achieve maximum suction and thermal efficiency.

1. Placing




Place the tip so that it fits over the component terminal.

2. Rotating



When the solder liquefies, gently rotate the tip so that the component terminal can be lifted off.

3. Aspirating



Press the vacuum pump button long enough to remove the solder.


The vacuum pump will continue to run for a few seconds. This makes sure that the vacuum circuit is completely empty. If there are any solder remains left on a terminal, just resolder it with fresh solder and repeat the desoldering operation.

Desoldering Iron Maintenance


⚠ Note: For the following operations, turn off the station or disconnect the tool and wait until the tool temperature drops to room temperature.

Changing Heating Element


1. Remove the filter before changing the heating element.

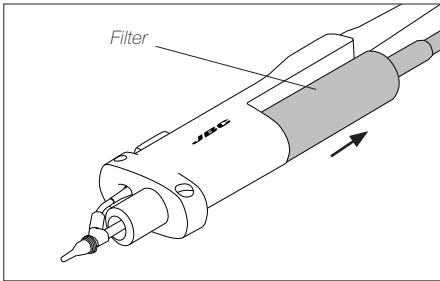


2. Remove the fixing screw and take out the heating element.

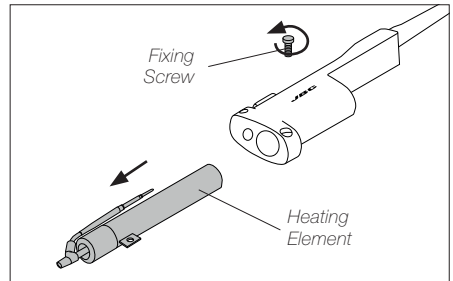

3. Insert the new heating element into the tool.

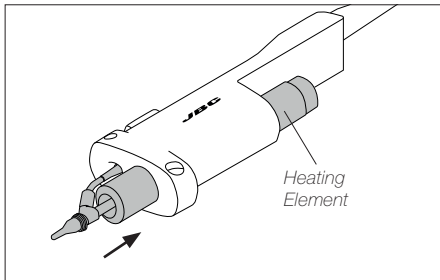


4. Tighten the fixing screw and insert the filter.

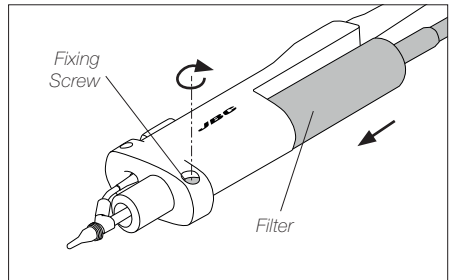


Changing Iron Filter


1. Remove the tube from the filter.

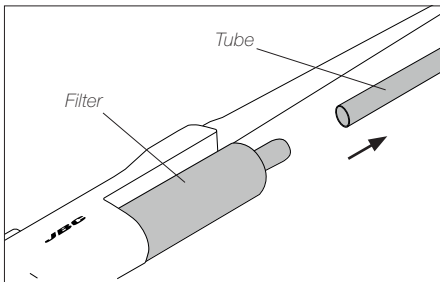

2. Remove the filter from the tool.

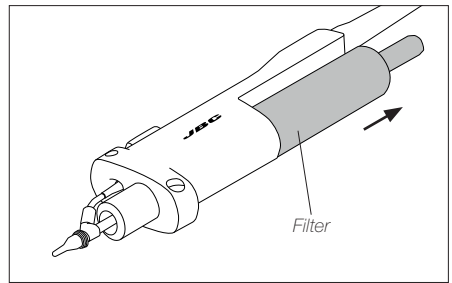


3. Insert a new filter (ref. 0008473) into the tool and mount the tube onto the filter.

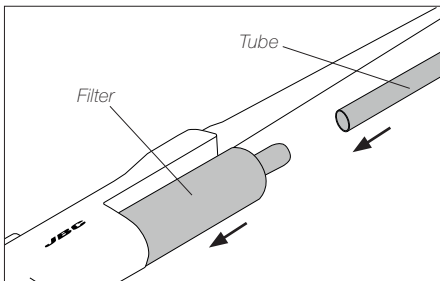


Cleaning Solder Collector

⚠ Note: For this operations, turn off the station or disconnect the tool and wait until the tool temperature drops to room temperature.


1. Remove the filter before cleaning the solder collector.

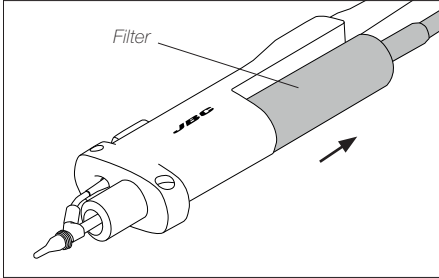


2. Take out the solder collector with the metal solder retention.

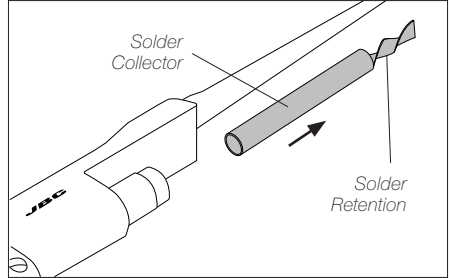


3. Use the cleaning brush (ref. 0008297) to clean the solder collector inside or replace it for a new one.

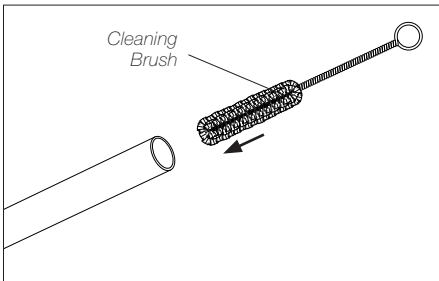

4. Insert the solder collector with the metal solder retention into the heating element.

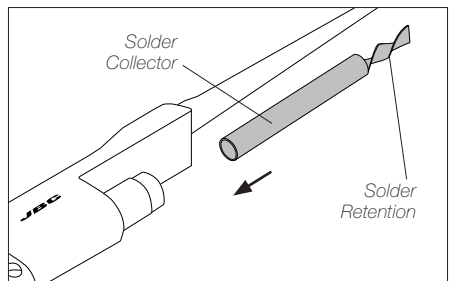

5. Mount the filter onto the tool.

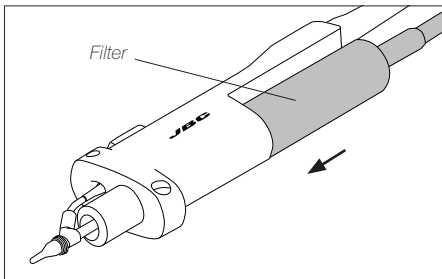


Tip Care

To prevent tip oxidation cover tip with solder tin when not in use. ⚠ **Note:** Do not press the vacuum pump button while tinning the desoldering tip, as the fumes given off by the flux would quickly block the ducts and the air filter.


Changing Tips

⚠ **Note:** This operation should be done while the tip is hot and at a minimum temperature of 250°C, so that any tin left inside is still molten.

1. To remove the tip, use a pair of flat-nosed pliers, twist the tip and pull.

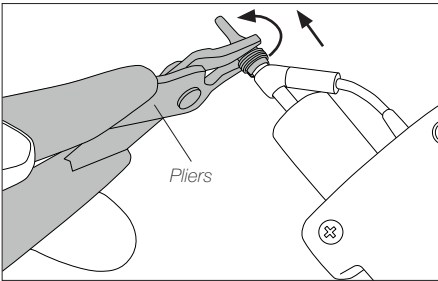

2. To fasten the tip, do not hold it on the spring clamp. Place the pliers directly in front of the spring.

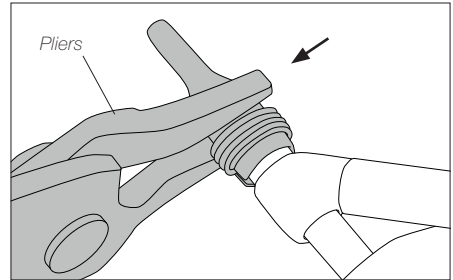


Cleaning Tips

The tip hole should be periodically cleaned.

⚠ **Note:** Let the tool cool down before performing this operation.

Choose the cleaning rod diameter according to the tip size. Put the rod at the tip, gently move it back and forth while turning it slightly.

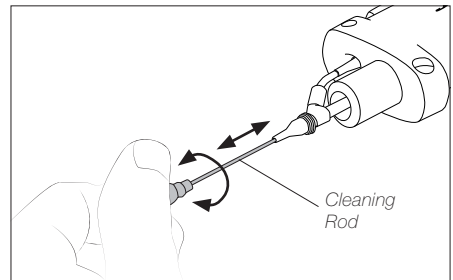

Compatible Tips

DS360 uses C360 tips. Different sizes are available for through-hole desoldering and for pad cleaning. Find the model that best suits your soldering needs at: www.jbctools.com

Through-Hole
Desoldering



Pad Cleaning



Maintenance

Before carrying out maintenance, always switch the device off and disconnect it from the mains. Allow the equipment to cool down.

- Use a damp cloth to clean the tool. Alcohol can only be used to clean the metal parts.
- Periodically check that the metal parts of the tool and stand are clean so that the station can detect the tool status.
- Maintain tip surface clean and tinned prior to storage in order to avoid tip oxidation. Rusty and dirty surfaces reduce heat transfer to the solder joint.
- Periodically check all cables and tubes.
- Replace any defective or damaged pieces. Use original JBC spare parts only.
- Repairs should only be performed by a JBC authorized technical service.

Safety



It is imperative to follow safety guidelines to protect health and prevent electric shock, injury, fire or explosions.

- Do not use the tool for any purpose other than soldering or rework. Incorrect use may cause fire.
- Do not work on electrically live parts.
- The tool should be placed in the stand when not in use in order to activate the sleep mode. The soldering tip or nozzle, the metal part of the tool and the stand may still be hot even when the station is turned off. Handle with care, including when adjusting the stand position.
- Do not leave the appliance unattended when it is on.
- It is necessary to turn the station off before changing tips.
- Heat can cause inflammable products to ignite even when out of sight.
- Be careful with the remains of liquid tin. Avoid flux coming into contact with skin or eyes to prevent irritation.
- Utmost care must be taken with liquid tin waste which can cause burns.
- Be careful with the fumes produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- This appliance can be used by children over the age of eight as well as persons with reduced physical, sensory or mental capabilities or lacking of experience provided that they have been given adequate supervision or instruction concerning use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

Specifications

DS360

Micro Desoldering Iron

Ref.: **DS360-A**

- | | |
|---|---|
| - Total Net Weight: | 176 g / 0.39 lb |
| - Package Dimensions / Weight:
(L x W x H) | 300 x 125 x 65 mm / 341 g
11.81 x 4.92 x 2.56 in / 0.75 lb |

Complies with CE standards.
ESD safe.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.

Get 1 extra year JBC warranty by registering here:
<https://www.jbctools.com/productregistration/>
within 30 days of purchase.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.



www.jbctools.com

0028149-0122