


1.9kW Single-Phase Switched PDU, LX Platform, Outlet Monitoring, 120V Outlets (24 NEMA 5-15/20R), L5-20P Plug, 0U, TAA

MODEL NUMBER: PDUMVR20NETLX

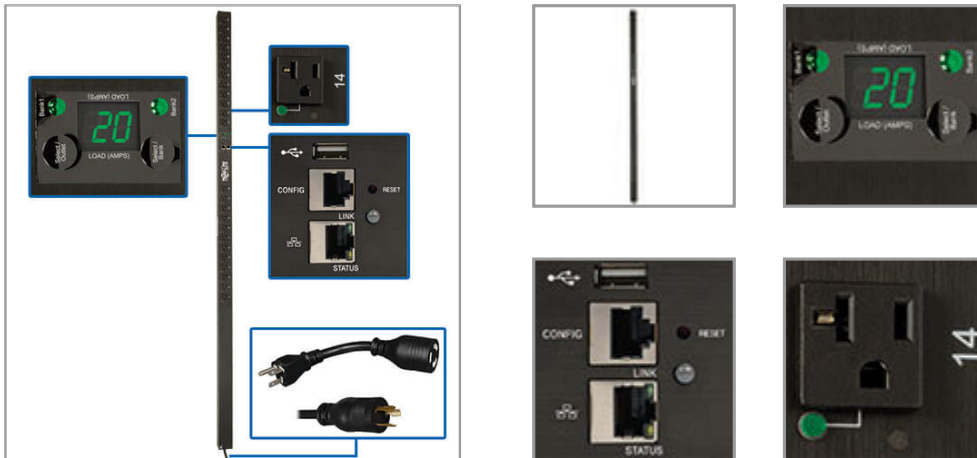

1.9kW vertical PDU with individual outlet metering distributes, monitors and manages single-phase power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

Description

The PDUMVR20NETLX 1.9kW Single-Phase Switched PDU with individual outlet metering provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. By reducing the frequency of on-site visits, these advanced remote capabilities can save you money and reduce downtime.

The switched PDU features 24 individually controllable NEMA 5-15/20R outlets with cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-ft. (3.05 m) power cord with NEMA L5-20P plug and optional 5-20P adapter connects the PDU to an AC source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor each load bank's current, each outlet's current and the total connected PDU load in real time to ensure they remain well below maximum capacity with no danger of overload. The switched PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets.

Features

Distributes, Monitors and Manages Network-Grade AC Power 1.9kW 120V 20A switched PDU with single-phase input 10-ft. (3.05 m) power cord with NEMA L5-20P plug and 5-20P adapter Firmware upgrades support future product enhancements

24 NEMA 5-15/20R Switched Outlets Distribute AC Power Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Included cord retention brackets prevent cables from becoming accidentally disconnected

Digital Ammeter Reports current for each load bank, each individual outlet, and total PDU load Supports IP-address self-ID Digits flip 180° for easy reading at either angle

Highlights

- 1.9kW 120V single-phase switched 70-inch 0U PDU
- 24 controllable NEMA 5-15/20R outlets in 2 load banks
- Pre-installed WEBCARDLX with latest version of PADM20 for IP-based Auto Probe feature
- Digital ammeter for on-site load monitoring in real time
- 10-ft. (3.05 m) power cord with NEMA L5-20P plug and 5-20P adapter

Package Includes

- PDUMVR20NETLX 1.9kW Single-Phase Switched PDU
- Built-in LX Platform interface
- NEMA 5-20P plug adapter
- Configuration cable
- Cord retention brackets
- (24) Cable ties
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Built-In LX Platform Interface Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities. PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations. IP-based Auto Probe detects lost connectivity and restores service autonomously.

Broad Communications Compatibility Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2c, SNMPv3, telnet, SSH, CLI, FTP, DHCP and NTP. Supports automatic and manual assignment of IP address.

Essential Safety Features Tiered access allows administrator and guest to log in via web browser. Immediate alert notifications via email or SNMP traps. Supports user-specified alarm notification thresholds. Real-time clock backup maintains day/date even if PDU is unpowered.

Easy 0U Installation in EIA-Standard 19 in. Racks 70 in. PDU mounts vertically using included toolless buttons or rack-mounting brackets. Included PDUMVROTATEBRKT allows mounting with rear-facing outlets.

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases.

Specifications

| OVERVIEW | |
|----------------------------------------|---------------------------------------------------------------|
| UPC Code | 037332204141 |
| PDU Type | Switched |
| INPUT | |
| PDU Input Voltage | 120 |
| Recommended Electrical Service | Single-phase 20A 120V service |
| Maximum Input Amps | 16 |
| Maximum Input Amps Details | Agency de-rated to 16A continuous |
| PDU Plug Type | NEMA 5-20P; NEMA L5-20P |
| Input Phase | Single-Phase |
| Input Cord Length (ft.) | 10 |
| Input Cord Length (m) | 3.05 |
| OUTPUT | |
| Output Capacity Details | 1.92kW (120V) / 16A total capacity; 16A max per outlet |
| Frequency Compatibility | 50 / 60 Hz |
| Output Receptacles | (24) 5-15/20R |
| Output Nominal Voltage | 120V |
| Customized Load Management Receptacles | Each outlet is individually controllable via remote interface |
| USER INTERFACE, ALERTS & CONTROLS | |



| | |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Front Panel LCD Display | Digital display reports load level in amps for LOAD BANK 1 (Outlets 1-12), LOAD BANK 2 (Outlets 13-24), LOAD BANKS 1&2 COMBINED (Outlets 1-24) and each individual output receptacle; Digital display can also be used to scroll the configured IP address |
| Front Panel LEDs | BANK 1 and BANK 2 LEDs verify which load bank the digital current display is reporting (Bank 1, Bank 2 or Banks 1&2 Combined); BANK 1 or BANK 2 LED will flash when the digital display is reporting output current for one of the outlets in that load bank; 24 additional LEDs, one near each output receptacle, will light continuously to verify power on/off status and flash to indicate that the digital display is reporting output current for just that individual receptacle. LX Platform Interface: Network Link/Activity Status LED (Yellow), Network Speed LED (Green); LX Platform status LED (Green) |
| Switches | SELECT OUTLET and SELECT BANK switches advance the LCD screen and associated LED to display power consumption for individual output receptacles and output load banks; Press and hold the SELECT BANK button for 4 seconds to rotate the digital display 90 degrees for overhead power input; Press and hold the SELECT OUTLET button for 4 seconds to scroll the configured IP address. LX Platform Interface: Recessed reset switch for interface reboot and factory reset |
| Current Measurement Accuracy (Amps) | +/-1% |
| Voltage Measurement Accuracy (Volts) | +/-1% |
| Power Measurement Accuracy (Watts) | +/-1% |
| SURGE / NOISE SUPPRESSION | |
| Automatic Shut-Off | No |
| PHYSICAL | |
| Material of Construction | Metal |
| Form Factors Supported | 0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks |
| PDU Form Factor | Vertical (0U) |
| Shipping Dimensions (hwd / cm) | 11.51 x 15.49 x 192.48 |
| Shipping Dimensions (hwd / in.) | 4.53 x 6.10 x 75.78 |
| Shipping Weight (kg) | 6.77 |
| Shipping Weight (lbs.) | 14.93 |
| Unit Dimensions (hwd / in.) | 70 x 2.2 x 2.04 |
| Unit Dimensions (hwd / cm) | 178 x 5.6 x 5.2 |
| Unit Weight (lbs.) | 9.6 |
| Unit Weight (kg) | 4.35 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 0C ~ 40C (32F ~ 104F) |
| Storage Temperature Range | -30°C to +60°C (-22°F to +140°F) |
| Relative Humidity | 5-95% non condensing |
| Operating Elevation (ft.) | 0-10,000 |
| Operating Elevation (m) | 0-3000 |



| COMMUNICATIONS | |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PowerAlert Software | LX Platform Interface: PowerAlert Device Manager |
| Communications Cable | RJ45-to-DB9 configuration/console Access cable |
| Network Monitoring Port | RJ45 Network port, RJ45 Serial Config/Console Access port; USB A port supports a variety of Envirosense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. |
| SNMP Compatibility | Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, telnet, SSH and SNMP management systems |
| Network Compatibility | 10 Mbps; 100 Mbps (Fast Ethernet) |
| FEATURES & SPECIFICATIONS | |
| High Availability PDU Features | Auto Probe Monitoring and Reboot (included); Auto Load Shedding |
| STANDARDS & COMPLIANCE | |
| Product Certifications | CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1 |
| Product Compliance | RoHS; FCC Part 15 Class A (USA) |
| WARRANTY | |
| Product Warranty Period (Worldwide) | 2-year limited warranty |

© 2022 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>