



Datasheet

MSO3000X Series Mixed Signal Oscilloscope

V1.0

2024.05


Product Introduction

MSO3000X series mixed signal oscilloscope with the maximum bandwidth of 500 MHz, maximum sampling rate of 5 GSa/s and equipped with 4 analog channels and 16 digital channels, the memory depth up to 500 Mpts. MSO3000X has unique Ultra Phosphor 3.0 technology, the waveform capture rate is up to 2,000,000 wfms/s, 256 grey temperature color, innovative digital trigger system with high trigger sensitivity and low jitter. This oscilloscope supports multiple advanced triggers, serial bus trigger and decoding, and supports the advanced sampling and analysis mode of spectrum analyzing, power analysis, histogram, waveform recording, enhanced resolution (ERES), hardware acceleration template testing, Search and Navigate. In addition, this oscilloscope has multiple measurements and mathematical operations. MSO3000X series adopts 10.1 - inch capacitive touch screen that supports multiple gestures for common waveform operations, and combined with multiple one-touch keys on the front panel, this greatly optimizes the efficiency of oscilloscope operation and improves the user experience.



Mainstream touchscreen design, intelligent interactive experience

Featuring a 10.1 - inch HD capacitive multi-touch screen, it supports a variety of gesture operations, such as touch, drag, zoom and rectangle drawing, making operation more convenient and smooth, and helping the user can master the instrument more easily. It retains the traditional key and knob operation while supporting mouse and keyboard, making instrument operation more versatile and greatly improving the interactive experience.

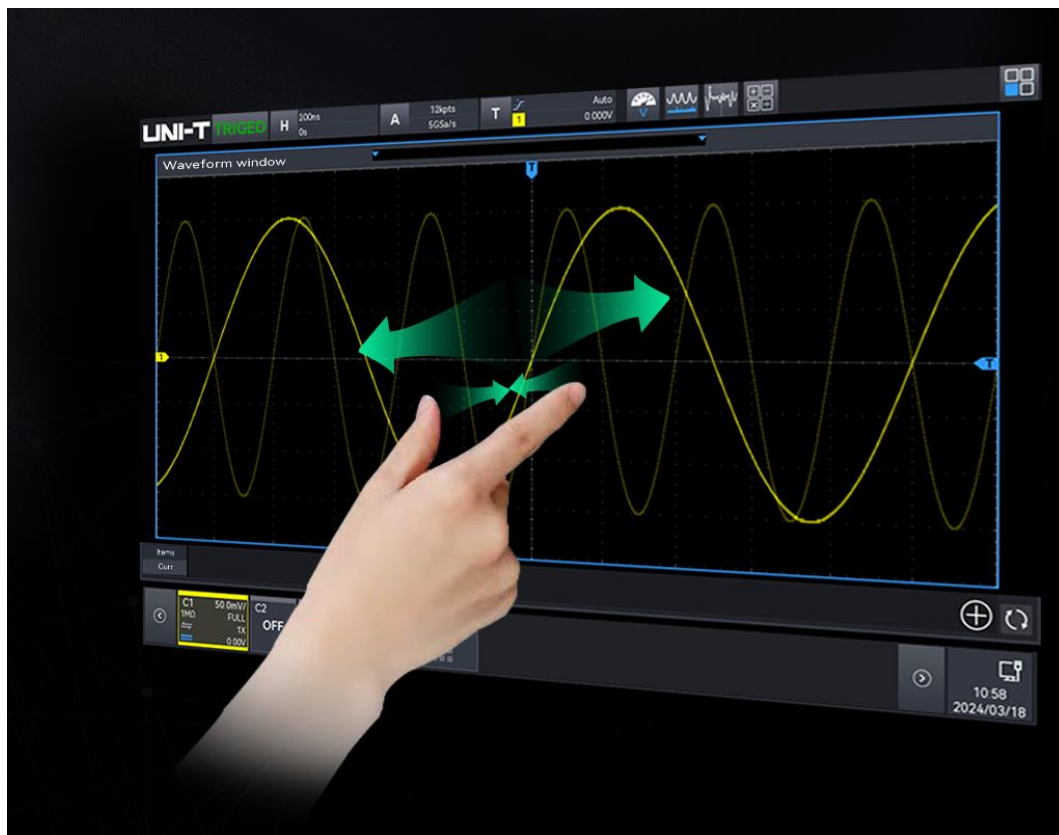

Brand new appearance design

Innovative appearance of the instrument, double-sided thinning design; display and panel level, to enhance the touch operation and visibility range; display edge black frame margin + metal grey and black body, to enhance the overall sense of the instrument.




Features and advantage

- Analog channel bandwidth: 500 MHz/350 MHz
- Real-time sampling rate of the analog channel is up to 5 GSa/s. The maximum sampling rate of the digital channel is 1.25 GSa/s
- 4 analog channels, 16 digital channels, Maximum memory depth 500 Mpts
- The maximum waveform capture rate is 800,000 wfms/s (sequence mode: 2,000,000 wfms/s)
- 9 instrument functions: Digital Oscilloscope, Logic Analyzer, Function/Arbitrary Waveform Generator, Spectrum Analyzer, Digital Voltmeter, Frequency Counter, Protocol Analyzer, Bode Plot Analyzer and Power Analyzer
- Built-in 50 MHz equivalent performance dual channel function/arbitrary waveform generator, supporting load the oscilloscope on-screen data to Gen arbitrary waveform output in real time, and supporting multiple built-in arbitrary waveforms
- Bode plot loop test analysis to analyze the system stability
- Parameter measurement adds histogram and line graph display
- Up to 200,000 frames of uninterrupted hardware real-time waveform recording and analysis, with USB memory export support waveform recording and analyze
- Maximum 4Mpts enhanced FFT, supporting the spectrum analyzer function of frequency setting, waterfall curve, detection setting and marker
- 54 kinds of parameter measurement
- Multi-Windows display
- Multi-channel 7-digit hardware frequency counter, supporting adjustable frequency refresh time and effective digit
- DVM: DC, ACRMS and DC+ACRMS
- Multiple trigger types: edge, pulse width, ramp, runt pulse, over-amplitude pulse, delay, timeout, duration, setup & hold, Nth edge and code pattern
- Protocol trigger and decoding function: RS232/UART, I2C, SPI, CAN, CAN-FD, LIN, FlexRay, AUDIO, MIL-STD-1553B, Manchester, SENT, ARINC429
- Zone triggering for capturing accidental signal and observing complicated signal
- Ultra Phosphor3.0 super phosphor display effect, up to 256 grey display
- 10.1 - inch 1280x800 HD capacitive multi-touch screen, supporting gesture control: click, slide, zoom, edit and drag
- Multiple peripheral interfaces: USB Host, USB Device, LAN, EXT Trig, AUX Out (Trig Out, Pass/Fail, DVM), Gen Out, HDMI
- SCPI (Standard Command for Programmable Instrument)
- Built-in WebServer for accessing and controlling the instrument through browser, supporting PC/Mobil phone device for cross-platform access the instrument

Design Features


Cost-effective Nine-in-One integrated oscilloscope

MSO3000X series is integrated 9 instrument functions, which includes Digital Oscilloscope, Logic Analyzer, Function/Arbitrary Waveform Generator, Spectrum Analyzer, Digital Voltmeter, High-Precision Frequency Counter, Protocol Analyzer, Bode plot Analyzer and Power Analyzer. This is a cost-optimal oscilloscope for users.

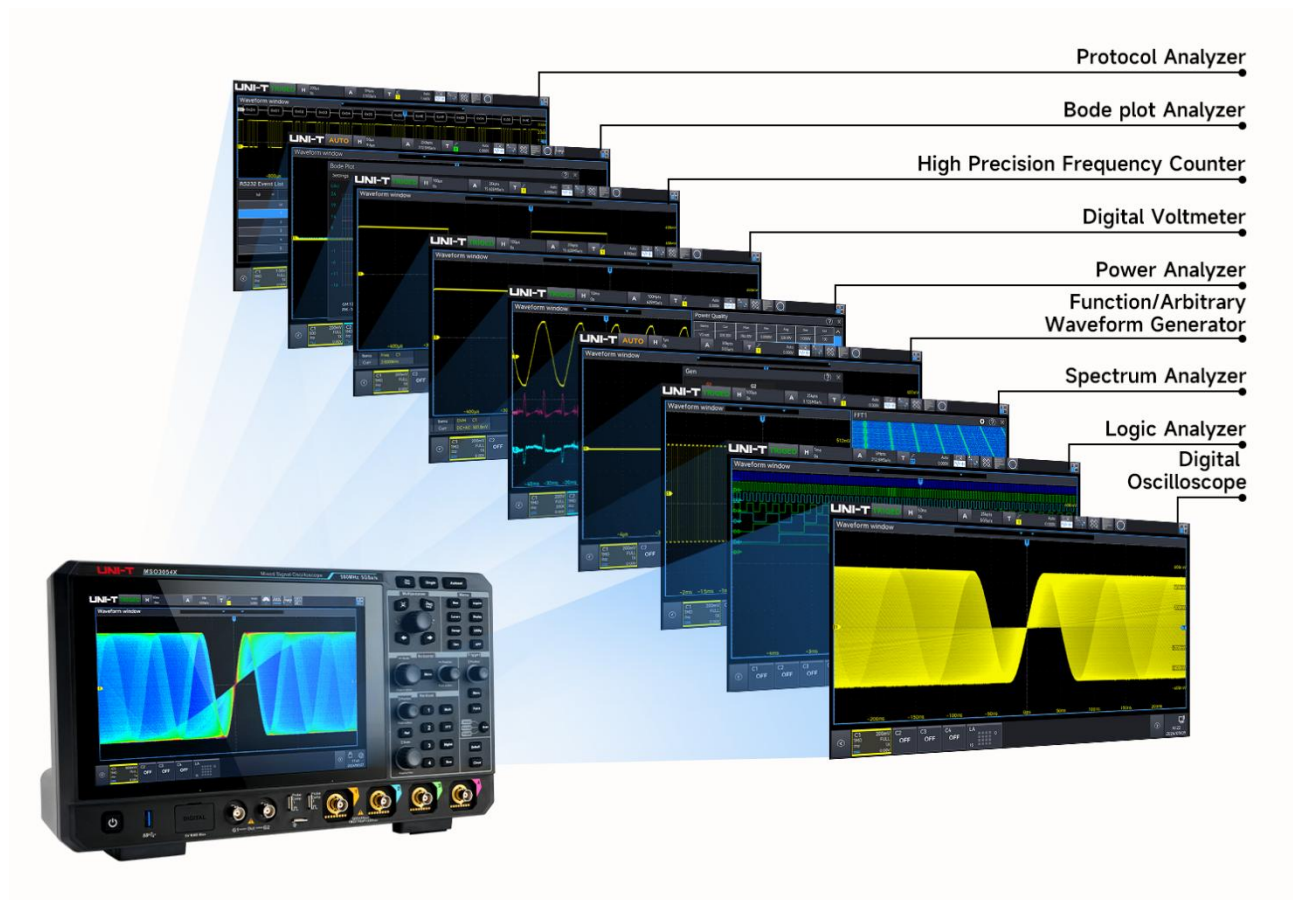

Digital Oscilloscope

- Bandwidth: 500 MHz/350 MHz
- Maximum real-time sampling rate: 5GSa/s
- Maximum memory depth: 500 Mpts
- 4 analog channels, 1 external trigger channel

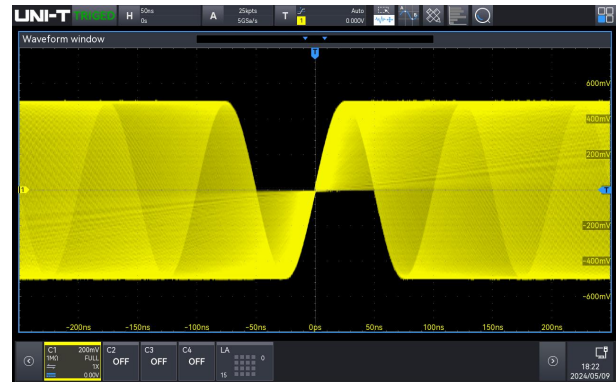

Logic Analyzer

- 16-channel logic analyzer can be used with purchase of a UT-M15 logic analyzer probe (option)
- Maximum sampling rate: 1.25 GSa/s
- Maximum memory depth: 500 Mpts
- Minimum detectable pulse width 800ps
- Digital probe provides high 8-bit and low 8-bit signal input port, it simplifies the connection of DUT. When connecting to a square pins, UT-M15 can be connected directly to 8x2 square pins 2.54 mm
- Logic analyzer probe UT-M15 has great electrical feature, the input impedance is $101\ \Omega \pm 1\%$, but the capacitive load is only 9.0




Function/Arbitrary Waveform Generator (option)

- 50 MHz equivalent performance dual channel output
- Sampling rate: 250 MSa/s
- Vertical resolution: 16-bit
- Built-in multiple standard waves: Sine, square, pulse, ramp, arbitrary, noise and DC
- AM, FM, ASK, FSK and sweep output



Spectrum Analyzer

- Standard enhanced FFT, up to 4 Mpts, 4 channels signal analysis
- Frequency range: 0Hz~1.25GHz
- Waterfall curve
- 4 traces and 4 detections
- Mark type: Auto, manual and threshold
- Marker point list

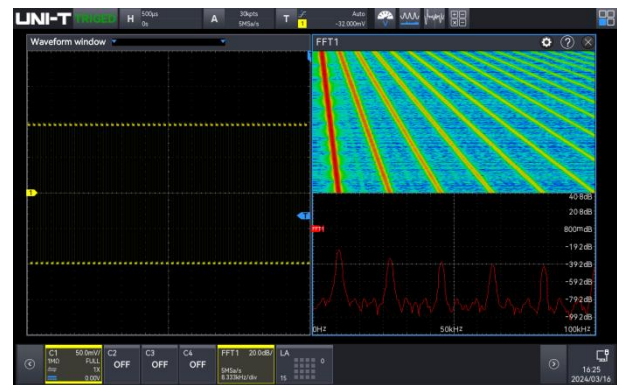


Digital Voltmeter

- 4-digit voltmeter
- DC/ACRMS/AC+DCRMS
- Limit alarm



High-Precision Frequency Counter

- 7-digit hardware frequency counter
- Adjustable frequency counter refresh time and effective digit
- Summary counter

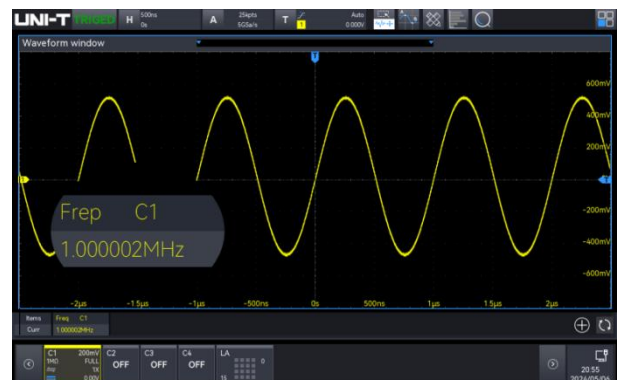

Bode Plot Analyzer

- Built-in function/arbitrary waveform generator
- Frequency response analysis
- Loop stability analysis
- Filter analysis
- Amplifier analysis



Protocol Analyzer

- 12 kinds of trigger protocol and decoding, which including the field of computer, embedded serial
- bus, automobile, aerospace and audio
- Decoding can be operated in the pause and record modes
- Event list and search function



Option name	Description	Option model	Standard/Option
Computer serial bus triggering and decoding	RS-232/422/485/UART	-	Standard
Embedded serial bus triggering and decoding	I2C, SPI	-	Standard
Automobile serial bus triggering and decoding	CAN	MSO3000X-CAN	Option
Automobile serial bus triggering and decoding	LIN	MSO3000X-LIN	Option
Automobile serial bus triggering and decoding	CAN-FD	MSO3000X-CAN-FD	Option
Automobile serial bus triggering and decoding	FlexRay	MSO3000X-FLEX	Option
Automobile sensor bus triggering and decoding	SENT	MSO3000X-SENT	Option
Audio serial bus triggering and decoding	Audio	MSO3000X-AUDIO	Option
Aerospace serial bus triggering and decoding	MIL-STD-1553, ARINC 429	MSO3000X-AREO	Option
Wireless communication serial bus triggering and decoding	Manchester	MSO3000X-MANCH	Option

Power Analyzer

With the development of chip technology, the power supply system requirements are also increased. When the power supply network of small voltage and high current has been the trend, especially for the chip or the power supply network composed of precision components, the requirements of the various parts of the circuit reliable power supply and noise suppression, but also to ensure that the

ures as shown in the diagram, connecting to the channel that you want to observe, and then finally make appropriate fine-tuning to get the results you want.

- Power quality
- Harmonic analysis
- Switching loss*
- Ripple wave analysis
- Loop analysis
- Safety operation area*




10 / 37

Ultra Phosphor 3.0

When you try to find and debug the occasional or intermittent anomalies in the signal, the waveform capture rate is a very important indicator. The capture rate of an oscilloscope is the ability to capture how many waveforms per unit of time, it reflects the oscilloscope speed of the process and analysis signal.


MSO3000X adopts advanced software and hardware architecture to achieve data processing that is 5~10 times higher than the previous version. It is equipped with Ultra Phosphor 3.0, which supports 8-channel parallel graph mapping, the processing rate is up to 20 Gbps, the waveform capture rate is up to 800,000 wfms/s, and up to 2,000,000 wfms/s in the sequence mode.

Compared with the traditional oscilloscope, the dead time of MSO3000X can be $< 1\mu\text{s}$, that is, capture 750ps fast edge signal of 2000,000 per second, so the accidental signal can be captured easily and correctly.

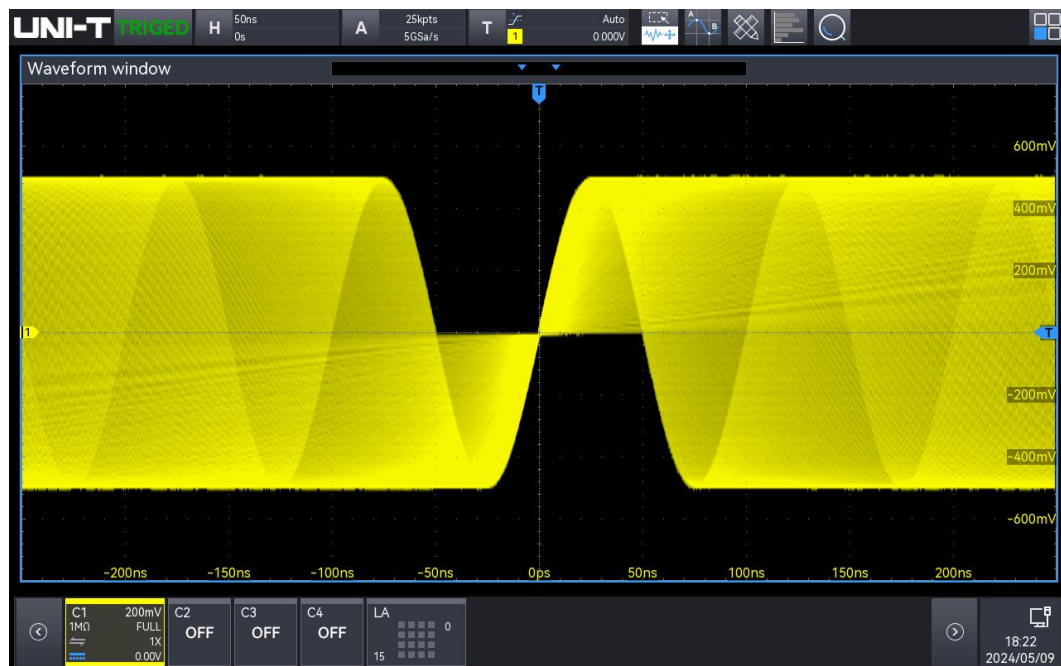

Multi-Windows

Multi-Windows can be freely dragged and extended.

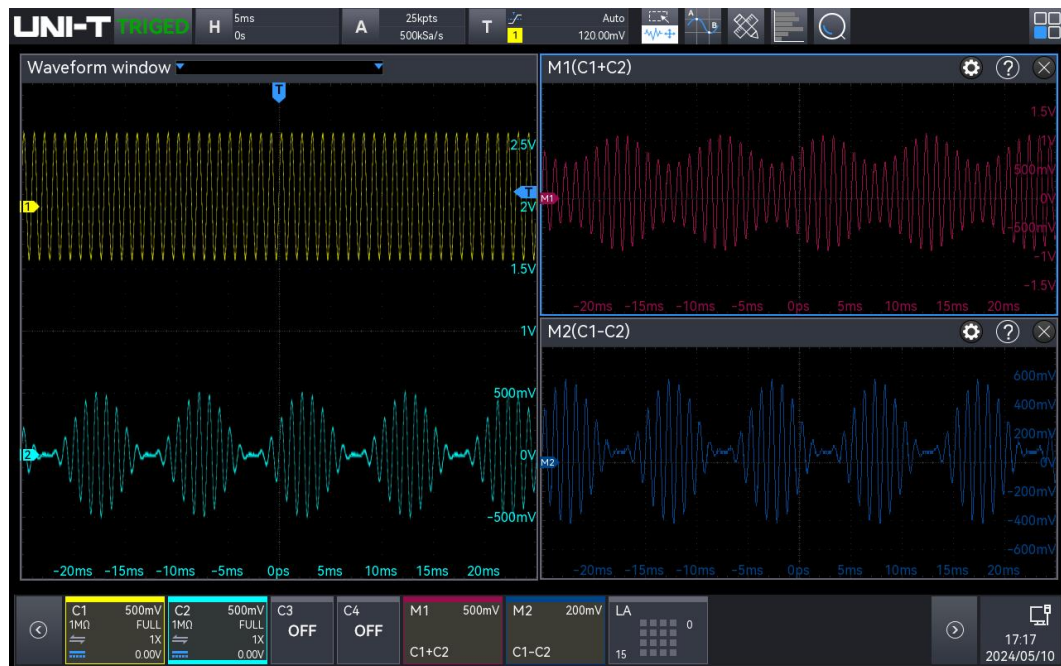

Brand new quick Autoset strategy

Fuzzy control is an intelligent control method based on fuzzy set theory, fuzzy linguistic variables and fuzzy logic reasoning. The advantages of the algorithm are fewer iterations, faster speed, and better anti-interference ability.

In the past, the oscilloscope is performed Autoset to find the appropriate signal amplitude and frequency to display, but the response speed of oscilloscopes is very different due to different solutions adopted by each oscilloscope manufacturer, it affecting the experience of using oscilloscopes.

UNI-T redefines the execution of Autoset by adopting fast fuzzy algorithm based on analog signals and multi-channel parallel processing technology, combined with a 7 bits high-precision hardware frequency counter, which allows the oscilloscope to quickly find and process the amplitude and frequency of the unknown signals displayed when executing the Autoset strategy. It takes less than 1.5s to open the whole channel, and less than 1s to open a single channel, which greatly improves the working efficiency and reduces the risk of misuse for users who need to change test objects frequently and need to test quickly.

Multiple parameter measurements

The parameter measurement is a very important function for engineer when using an oscilloscope. MMSO3000X series provides 54 kinds of measurement parameters, and added 27 measurement parameter can be displayed at the same time. Each page of measurement statistics displays 9 measurement parameters, and it can be displayed in histogram and tendency chart. The histogram

can visually show the possibility distribution of the parameter. The tendency chart can reflect the parameter changing with time.

The parameter snapshot displays 39 kinds of test items for a single channel measurement. The parameter of parameter snapshot includes the measurement parameter of voltage and time in single channel, the measured result will be constantly refreshed during the process.


MSO3000X series adds a new strategy of amplitude calculation, top and bottom. It is convenient for the engineer to use the parameter measurement function. In addition, the added burst function of MSO3000X series can display the burst parameter, so that the channel measured data can be learned accurately and immediately.



Waveform math


MSO3000X provides a system of algorithms for complex waveform math that you can use to further process your waveforms and display the results directly on the oscilloscope.

- Basic operation: +, -, *, ÷
- Digital filter (high-pass, low-pass, band-pass and band-limit)
- Custom function operation: analog channel, reference waveform

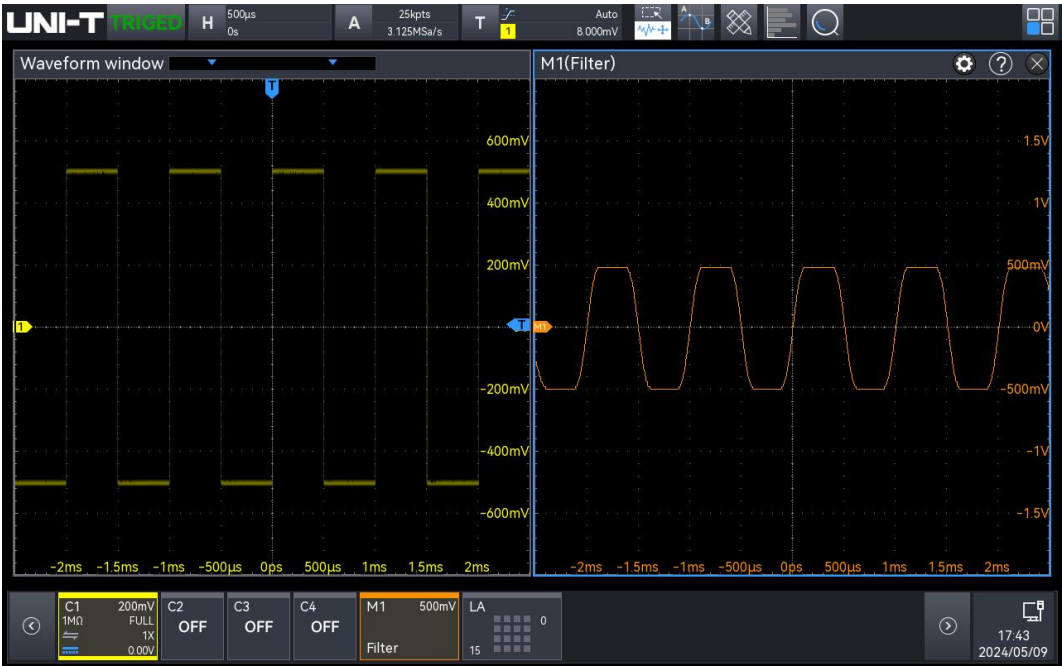


Navigate and Search

The memory depth of MSO3000X series is upgraded to 500 Mpts, and the high memory depth can capture tens of thousands of waveforms in one capture. It takes a lot of time for engineers to search the waveform by themselves. The search condition can be customized, which is very useful for searching the sampled signal and finding the waveform of interest. With the analysis function, the event can be analyzed in detail, eliminating the time consuming and inconvenience of manual search.

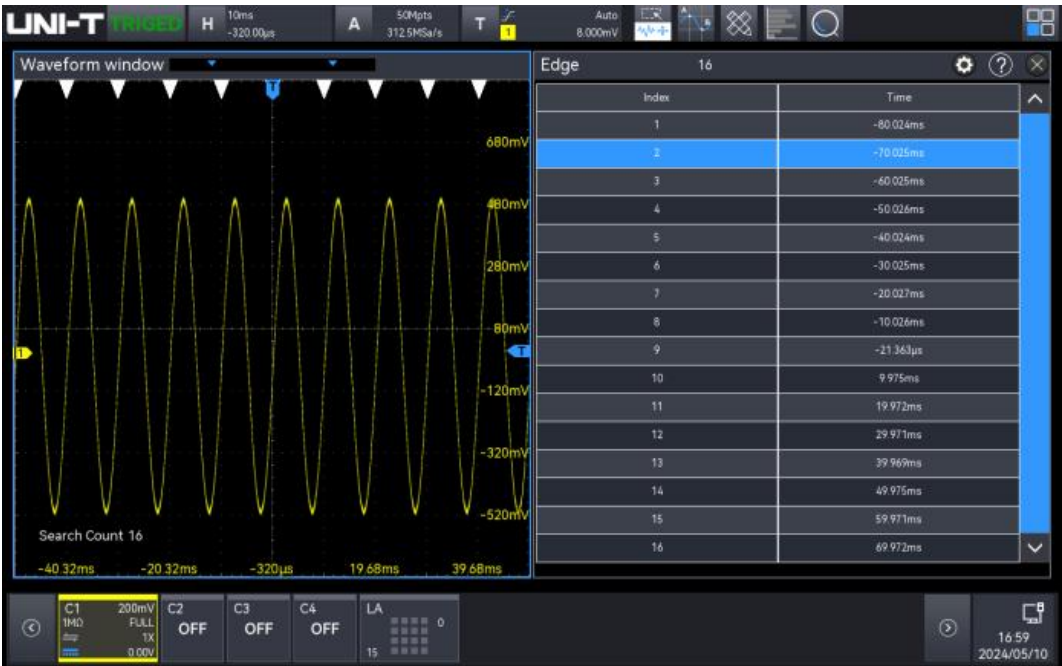

Zone triggering

The function of the zone triggering is twofold, firstly, to isolate the occasional abnormal signal. Secondly, to stabilize the waveform display. Only a stable trigger can provide a stable waveform display. With this function, engineers can deal with complex and variable signals during debugging. The zone triggering function is easy to use, so engineers don't have to spend time learning how to use it, A rectangle drawing gesture can quickly separate a signal that to be observed. The waveform does not have to be completely stable to trigger when using the zone triggering function, the zone triggering function can capture a waveform that meets the condition and make it stable to trigger.

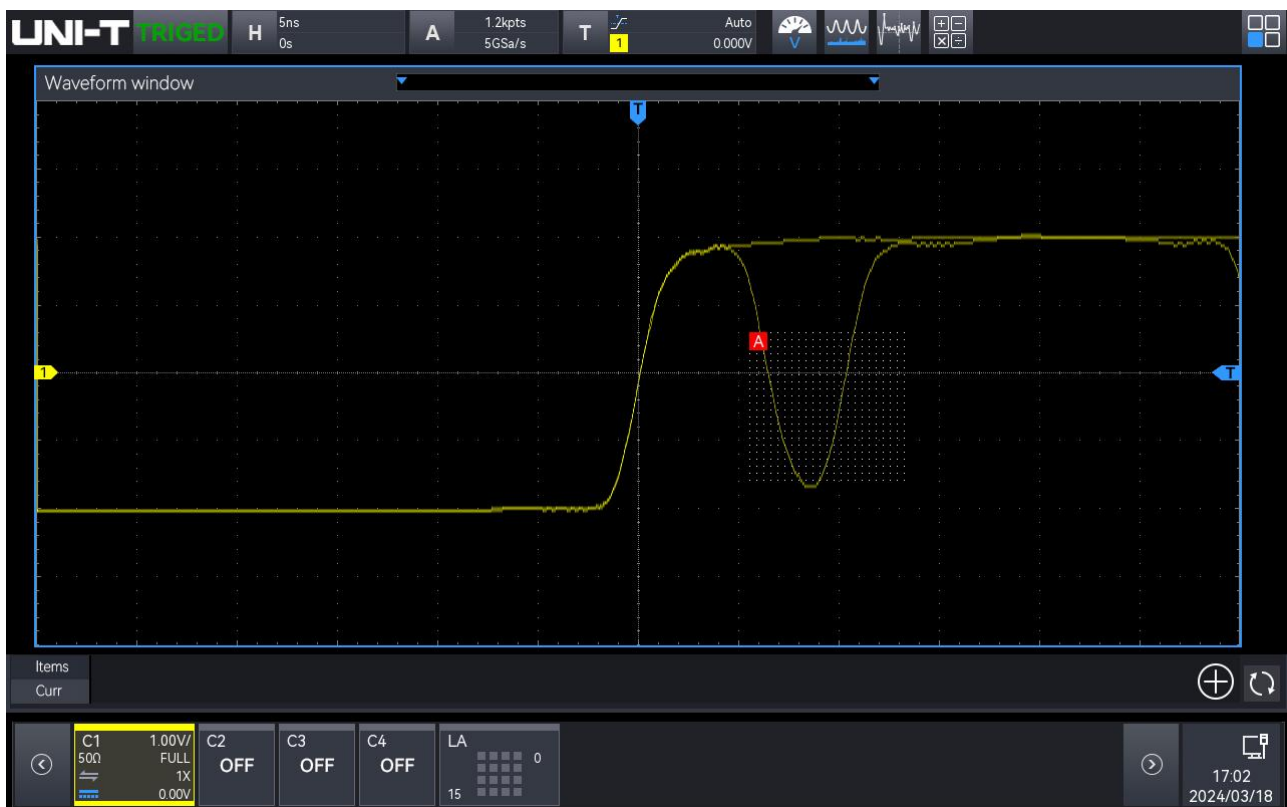

Various connection

MSO3000X series offers a wide range of connection with flexibility and convenience.

USB host ports on the front and rear panel that allow you to easily transfer screenshots, detailed instrument configuration information and waveform data to a storage device, and support USB, keyboard and mouse access for intuitive data entry and control.

USB device port on the rear-panel that allows you to remotely control the oscilloscope from a PC. The HDMI port allows the oscilloscope's high-resolution display to be projected in real time on other external monitors, ideal for teaching and teamwork.

WebServer

- SCPI for remote control
- Remotely check and control
- Export waveform file
- Browse user manual on-line
- PC/Mobil phone access



Active probe UT-PA2000 (Option)

- Bandwidth: 2 GHz
- Offset range: ± 8 V
- DC attenuation ratio: 10:1 $\pm 1\%$
- Automatically sense the attenuation ratio
- Automatically adjust the scale and measured value



Performance Characteristics

All specifications are guaranteed, except those marked "typical".

Unless otherwise stated, all the performance characteristics are suitable for the probe that the attenuation switch set to 10x and MSO3000X series mixed signal oscilloscope.

To meet these specifications, the oscilloscope should first meet the following conditions.

- The instrument must be operated continuously for at least thirty minutes at the specified operating temperature.
- The self-calibration must be performed when the operating temperature reaches or exceeds 5 °C.

Model	MSO3054X	MSO3034X
Analog bandwidth	500 MHz	350 MHz
Calculated rise time (10 to 90%) (typical)	≤0.75 ns	≤1.00 ns
Input/output channel number	4 analog channels	
	16 digital channels	
	2-channel signal output	
Sampling mode	Real-time sampling	
Acquisition mode	Normal, peak detect, high resolution, averaging, sequential sampling	
ERES	Enhanced bit : 1 , 1.5 , 2 , 2.5 , 3 , 4 (8~12-bit)	
Maximum sample rate	Analog channel: 5 GSa/s (interweave mode), 2.5 GSa/s (non-interweave mode) Digital channel: 1.25 GSa/s	
Average	After all channels have reached N samples simultaneously, the number of N times can be selected from 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192.	
Memory depth	Auto (limit to 10 Mpts), 25 kpts, 250 kpts, 500 kpts, 5 Mpts, 50 Mpts, 100 Mpts, 500 Mpts	
Maximum waveform capture rate	800,000 wfms/s 2,000,000 wfms/s (sequence mode)	
Hardware real-time waveform recording and playing	200,000 frames	

Screen	10.1 - inch 1280x800 HD capacitive touch screen
Vertical System (Analog channel)	
Input coupling	DC, AC, GND
Input impedance	$(1\text{ M}\Omega \pm 2\%) \parallel (16\text{ pF} \pm 3\text{ pF})$
Probe attenuation factor	Voltage probe ratio: 0.001 \times , 0.01 \times , 0.1 \times , 1 \times , 10 \times , 100 \times , 1000 \times , Custom Current probe ratio: 5 mV/A, 10 mV/A, 50 mV/A, 100 mV/A, 200 mV/A, 500 mV/A, 1V/A, Custom
Maximum input voltage	1M Ω : 400 V (DC+ACV _{pk}) 135 V _{RMS} 50 Ω : 5 V _{RMS} Max
Vertical resolution	8-bit
Vertical scale	500 $\mu\text{V}/\text{div}$ ~ 10 V/div (1 M Ω) 500 $\mu\text{V}/\text{div}$ ~ 1 V/div (50 Ω)
Offset range	500 $\mu\text{V}/\text{div}$ ~ 50 mV/div: $\pm 2\text{ V}$ (50 Ω and 1 M Ω) 100 mV/div ~ 1 V/div: $\pm 5\text{ V}$ (50 Ω) 100 mV/div ~ 1 V/div: $\pm 25\text{ V}$ (1 M Ω) 2 V/div ~ 10 V/div: $\pm 250\text{ V}$ (1 M Ω) Vertical offset reading: V
Band limit (typical)	50 Ω : 20 MHz , Full , Custom 1 M Ω : 20 MHz , Full , Custom
Low-frequency response	(AC coupling, -3 dB); $\leq 5\text{ Hz}$ (on BNC)
DC gain accuracy	$< 5\text{ mV}$: $\pm 3\%$ full scale, $\geq 5\text{ mV}$: $\pm 2\%$ full scale
DC offset accuracy	$\pm (2\% + 0.1\text{ div} + 2\text{ mV})$
Unit	W, A, V and U, default: V
Channel-to-channel isolation (typical)	DC~ maximum bandwidth: $> 40\text{ dB}$
Digital channel	
Threshold	8-channel in one group
Threshold selection	TTL (1.4 V) 5.0 V CMOS (+2.5 V), 3.3 V CMOS (+1.65 V) 2.5 V CMOS (+1.25 V), 1.8 V CMOS (+0.9 V) ECL (-1.3 V) PECL (+3.7 V) LVDS (+1.2 V) 0 V

	Custom
Threshold range	± 20.0 V, 20 mV stepping
Threshold accuracy	$\pm(100$ mV + threshold setting of 3%)
Dynamic range	± 10 V + threshold
Input impedance	$(101\text{ k}\Omega \pm 1\%) \parallel (9\text{ pF} \pm 1\text{ pF})$
Minimum voltage swing	500 mVpp
Minimum detectable pulse width (typical)	800 ps
Vertical resolution	1 bit
Channel-to-channel skew range	± 100 ns

Horizontal System (Analog channel)

	350 MHz (1 ns/div ~ 1 ks/div)
Time base range	500 MHz (500 ps/div ~ 1 ks/div) (simultaneously display the current sampling rate and memory depth)
Time base accuracy	± 1 ppm (original accuracy); ± 1 ppm (the aging rate of first year); ± 3.5 ppm (the aging rate of ten years)
Timebase delay time range	Pre-trigger (negative delay): ≥ 1 screen width Post-trigger (positive delay): 1 s ~ 7 ks
	Y-T (default)
	X-Y (CH1-CH2, CH1-CH3, CH1-CH4, CH2-CH3, CH2-CH4, CH3-CH4)
Time base mode	Roll, time base ≥ 50 ms/div, using the horizontal rotary knob to enter or exit Roll mode
	Scan, time base ≥ 50 ms/div, user can select Roll or Scan mode

Trigger

Trigger level range	Internal: ± 5 div from the center of the screen EXT: ± 7 V
Trigger modes	Auto, Normal, Single
Trigger holdoff range	80 ns ~ 10 s
Trigger coupling (typical)	DC: all signal can pass AC: block DC component of input signal HF reject: suppress high-frequency components of signals above 40 kHz

	LF reject: suppress low-frequency components of signals below 40 kHz
Noise reject	Suppress the high-frequency noise of signal, to reduce the error-touched possibility
Zone Triggering	
Zone	2 Zones; source: CH1~ CH4; feature: Intersect, Not Intersect
Edge	
Slope	Rising, Falling, Either
Source	CH1 ~ CH4, AC Line, EXT, D0 ~ D15
Runt	
When	>, <, ≤, ≥, None
Polarity	Positive, Negative
Pulse width	3.2 ns ~ 10 s
Source	CH1 ~ CH4, D0 ~ D15
Window	
Polarity	Rising, Falling, Either
When	Enter, Exit, Time
Set	3.2 ns ~ 10 s
Source	CH1 ~ CH4
Nth edge	
Slope	Rising,Falling
Idle time	3.2 ns ~ 10 s
Edge number	1 ~65535
Source	CH1 ~ CH4, D0 ~ D15
Delay	
Edge type	Rising, Falling
When	>, <, ≤, ≥, > <
Delay time	3.2 ns ~ 10 s
Source	CH1 ~ CH4, D0 ~ D15
Timeout	
Slope	Rising, Falling, Either
Timeout	3.2 ns ~ 10 s
Source	CH1 ~ CH4, D0 ~ D15
Duration	
Code pattern	H, L, X
When	>, <, ≤, ≥
Duration	3.2 ns ~ 10 s

Source	CH1 ~ CH4, D0 ~ D15
Setup and Hold	
Clock edge	Rising, Falling
Data type	H, L
Setup	3.2 ns ~ 10 s
Hold	3.2 ns ~ 10 s
Source	CH1 ~ CH4, D0 ~ D15
Pulse width	
Polarity	Positive, Negative
When	>, <, ≤, ≥
Pulse Width	0.8 ns ~ 4 s
Source	CH1 ~ CH4, AC Line, EXT, D0 ~ D15
Slope	
Slope	Positive, Negative
When	>, <, ≤, ≥
Time	3.2 ns ~ 1 s
Source	CH1 ~ CH4
Video	
Standard	PAL, NTSC, SECAM, 525p/60, 625p/50, 720p/24, 720p/25, 720p/30, 720p/50, 720p/60, 1080i/25, 1080i/30, 1080p/24, 1080p/25, 1080p/30, 1080pfs/24
Source	CH1 ~ CH4
Pattern	
Code pattern	H, L, X, Rising, Falling
Source	CH1 ~ CH4, D0 ~ D15
RS232/UART	
When	Start, FrameErr, CheckErrr, Data
Baud rate	2400 bps, 4800 bps, 9600 bps, 19200 bps, 38400 bps, 57600 bps, 115200 bps, custom
Data bit	5 bits, 6 bits, 7 bits, 8 bits
Source	CH1 ~ CH4, D0 ~ D15
I2C	
When	Start, Restart, Stop, Loss, Address, Data, Address & Data
Addr mode	7 bits, 10 bits
Addr range	0 ~77, 0 ~3 FF
Byte length	1 ~ 5

Source	CH1 ~ CH4, D0 ~ D15
SPI	
Mode	Timeout, CS
When	Start, Data
Timeout	100 ns ~1 s
Data bit	4 bits~32 bits
Source	CH1 ~ CH4, D0 ~ D15
CAN	
Signal type	CAN_H, CAN_L
When	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier & Data, End of Frame, Missing Ack, Biterror
Data rate	10kbps, 19.2kbps, 20kbps, 33.3kbps , 38.4kbps, 50kbps, 57.6kbps, 62.5kbps, 83.3kbps, 100kbps, 115.2kbps, 125kbps, 230.4kbps, 250kbps, 490.8kbps, 500kbps, 800kbps, 921.6kbps, 1Mbps, 2Mbps, 3Mbps, 4Mbps, 5Mbps, custom
Source	CH1 ~ CH4, D0 ~ D15
CAN-FD	
Signal type	CAN_H, CAN_L
When	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier & Data, End, Lost, Biterror
Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps , 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
FD data rate	250 kbps, 500 kbps, 800 kbps, 1 Mbps, 1.5 Mbps, 2 Mbps, 4 Mbps, 6 Mbps, 8 Mbps, custom
Source	CH1 ~ CH4, D0 ~ D15
LIN	
Trigger condition	Sync, Identifier, Data, Identifier & Data, Wake Frame, Sleep Frame, Error
Version	v1.x, v2.x, Either
Baud rate	1.2 kbps, 2.4 kbps, 4.8 kbps, 9.6 kbps, 10.417 kbps, 19.2 kbps, 20 kbps, custom
Data length	1 ~ 8
Source	CH1 ~ CH4, D0 ~ D15
FlexRay	
When	Start, Indicators, Identifier, Cycle, Heade, Data, Identifier & data, End frame, Error
Polarity	BM, BDiff/BP

Baud rate	2.5M bps, 5M bps, 10M bps
Source	CH1 ~ CH4, D0 ~ D15
Audio	
When	Word, Left, Right, Any
Format	Standard, Left Aligned, Right Aligned, TDM
Source	CH1~CH4, D0~D15
MIL-STD-1553B	
When	Sync, Command , Status, Data, Error
Polarity	Positive, Negative
Response time	2 μ s ~ 100 μ s
Source	CH1~CH4
SENT	
When	Fast: Sync, Status, Data, CRC, STAT+Data, S&D +CRC, F_ CRC Error, CONT Pul Err Slow: Sync, Short ID, Short Data, Short CRC, Short ID & data, Enh ID, Enh Data, Enh CRC, Enh ID & data, SLO CH CRC error
Source	CH1~CH4, D0~D15
Manchester	
When	Start, Header SEG, Data SEG, Tail SEG, Error
Baud rate	500 bps ~ 5 Mbps
Source	CH1~CH4, D0~D15
ARINC 429	
When	Start bits, End bits, Label, Source/Destination Identifier, Data, Signal/Status Matrix, Label & bits, Check bit error, Bit Error, Gap Error, All Error
Source	CH1~CH4
Decoding	
Number of decodes	4
Decoding type	Standard: RS232/UART, I2C, SPI Option: CAN, CAN-FD, LIN, FlexRay, I2S, MIL-5TD-1553B, SENT, Manchester, ARINC 429
Parallel	Up to 18 bits parallel bus decoding, supports the combination of analog channel and digital channel and supports custom time setting
Source	CH1 ~ CH4 , D0 ~ D15
Measurement	
Cursor	Voltage difference between cursors (ΔY)

	Time difference between cursors (ΔX)
	Reciprocal of ΔX (Hz) ($1/\Delta X$)
	Voltage and time of waveform point
	Display the cursor in the automatic measurement
Automatic measurements	Analog channel: 54 kinds of parameter Maximum, Minimum, Top, Base, Amplitude, Middle, Peak-Peak, Average, Average-Cycles, RMS, RMS-Cycles, AC RMS, AC RMS-Cycles, Area, Area-Cycles, +Area, -Area, +Area-Cycles, -Area-Cycles, +Overshoot, -Overshoot, +Preshoot, -Preshoot, Period, Frequency, Rise time, Fall time, +Width, -Width, +Duty, -Duty, +Pulse count, -Pulse count, Rising edge count, Falling edge count, Burst width, Burst Interval, Burst Period, Burst Per count, Ratio, Period Ratio, Setup time, Hold time, Setup & Hold Ratio, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, Phase(r-r), Phase(f-f) Digital channel: Frequency, Period, +Width, -Width, +Duty, -Duty, rising delay A→B, falling delay A→B, phase A→B, phase B→A
Measurement mode	Common measurement and accuracy measurement (Full memory hardware measurements)
Measurement type	Simultaneously display 27 kinds of parameter measurement
Measurement range	Main time base, Zoom time base, Cursor area
Measurement statistics	Mean, Maximum, Minimum, Std Dev, Count, Tendency chart, Histogram
Frequency Counter	7 bits hardware frequency counter Adjustable refresh time and effective digit
XY measurement	Time, Cartesian, Polar, Product, Ratio
Analysis	Frequency Counter, DVM, Pass/Fail, Waveform recording, Bode plot, Power Analysis
Math	
Waveform math	A+B, A-B, A×B, A÷B, advanced, Filter
Filter	Low pass, High pass, Band pass, Band stop
Operation	0,1,2,3,4,5,6,7,8,9(+, -, *, /, ^, >, <, &, , =, !=)
Function	sin, cos, sinc, tan, sqrt, exp, lg, ln, floor, abs, acos, asin, atan, sinh, tanh, ceil, cosh, fabs, intg, diff
FFT	
Channel number	4
Window types	Hanning, Hamming, Rectangle, Blackman

FFT count	Up to 4 Mpts
FFT vertical scale	Vrms, dB
FFT	Waterfall: ON, OFF
	Spectrum range: Start frequency, Stop frequency, Center frequency, Span
	Four traces: Normol, Average, Max Hold, Min Hold
	Marker: Marker type, Marker Points, Marker list
Storage	
Setting	Set Status(.set)
Waveform	Waveform data (*.dat) (*.csv)
Image	Image storage(*.bmp) (*.png) (*.jpg)
Report	Decoding Event List (*.csv) (*.pdf) (*.html)
Gen (Option)	
Channel	2
Sample rate	250 MSa/s
Vertical resolution	16-bit
Maximum frequency	50 MHz
Standard	Sine, Square, Ramp, Noise, DC and Arbitrary wave
Built-in arbitrary	200 types including Sinc, ExpRise, ExpFall, Cardiac, Gauss, Lorentz, and HaverSine
Sine wave	Frequency range: 1 μ Hz~ 50 MHz
	Flatness: ± 0.5 dB (relative 1 kHz)
	Harmonic distortion: -40 dBc
	Non-harmonic spurious (typ): -40 dBc
	Total harmonic distortion: 1% (DC ~ 20 kHz, 1Vpp)
Square wave/Pulse wave	SNR: 40 dB
	Frequency range
	Square wave: 1 μ Hz ~ 15 MHz; Pulse wave: 1 μ Hz ~ 15 MHz
	Rising/falling time: <13 ns (typical 1kHz, 1Vpp, 50 Ω)
	Overshoot: typical 2% (1 kHz, 1 Vpp, 50 Ω)
	Duty ratio
	Square wave: 1% ~ 99%, adjustable; Pulse wave: 1% ~ 99%, adjustable
	Resolution of duty ratio: 1% or 10 ns (take the greater value of both)
	Minimum pulse width: 20 ns
Square wave/Pulse wave	Resolution of pulse width: 10 ns
	Jitter: 2 ns

Ramp wave	Frequency range: 1 μ Hz ~ 400 kHz
	Linearity: 1%
	Symmetry: 0.1% - 99.9%
Noise	Bandwidth: 50 MHz (typical)
Arbitrary wave	Frequency range: 1 μ Hz ~ 5 MHz
	Waveform length: 8 k
	Internal save position: 200
Frequency	Accuracy: 100 ppm (< 10 kHz); 50 ppm (> 10 kHz)
	Resolution: 1 μ Hz
Amplitude	Output range: 20 mVpp ~ 6 Vpp (high resistance); 10 mVpp ~ 3 Vpp (50 Ω)
	Resolution: 1 mV
	Accuracy: $\pm 5\%$
DC offset	Range: ± 3 V (high resistance); ± 1.5 V (50 Ω)
	Resolution: 1 mV
	Accuracy: offset set value $\pm 5\%$

AM

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz ~ 50 kHz
Modulation depth	0% ~ 120%

FM

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 mHz ~ 50 kHz
Deviation	12.5 MHz (maximum)

ASK

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz ~ 50 kHz

FSK

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz ~ 50 kHz
Hopping frequency	Any frequency within the range of the Carrier wave signal

Sweep

Mode	Linear, Logarithmic and step
Sweep time	1 ms~500 s
Start and stop frequency	Any frequency within the range of the waveform

Display

Screen	10.1 - inch multi-touch capacitive screen
Resolution	1280×RGB×800 vertical pixel
Color	24-bit true colors
Persistence	Minimum, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 5 s, 10 s, 20 s, infinite, close
Display type	Point, Vector
Real-Time clock	Time and data (user-defined)
Waveform Intensity	1%~100% (default 50%)
Grid Intensity	0%~100% (default 50%)
Backlight Intensity	1%~100% (default 50%)
Transparent	0%~100% (default 50%)

Bode plot (option)

Start frequency	50 Hz ~ 50 MHz
Stop frequency	60 Hz ~ 50 MHz
Count	1 ~ 1000
Amplitude	High resistance: 20 mVpp~ 6 Vpp 50Ω: 10 mVpp~ 3 Vpp

DVM (typical)

Source	Analog channel
Mode	DC, AC+DC RMS, AC RMS
Resolution	4-bit
Buzzer	Beeps when the specified limit values are reached or exceeded

Interface

USB-Host 3.0	1 on the front panel, 2 on the rear panel
USB-Device 3.0	1 on the rear panel
LAN	LAN (VXI11), 10/100/1000 Base, RJ-45
AUX Out	Trig Out, Pass/Fail, DVM
Gen Out	2 on the front panel
10MHz reference input	50 Ω , amplitude 400 mVpp ~ 4.5 Vpp (-3.979 dBm, 17.044 dBm), frequency 10 MHz \pm 10 ppm
10MHz reference output	50 Ω , 1.65 Vpp square wave
HDMI ¹	1 port for external display or projector
WIFI	802.11b/g/n, WPA-PSK

General technical specification**Probe compensator output**

Output voltage	3 Vp-p
Frequency	10 Hz, 100 Hz, 1 kHz (default), 10 kHz

Power Source

Power source voltage	100 V ~ 240 VAC (fluctuate: $\pm 10\%$), 50 Hz/60 Hz 100 V ~ 120 VAC (fluctuate: $\pm 10\%$), 400 Hz
Power consumption	120 W Max
Fuse	3 A, F-class, 250 V

Environmental

Temperature	Operating: 0°C ~ +40°C Non-operating: -20°C ~ +70°C
Cooling	Forced cooling by fan
Humidity	Operating: below + 35 °C, relative humidity $\leq 90\%$; non-operating: + 35 °C ~ + 40 °C, relative humidity $\leq 60\%$
Altitude	Operating: below 3,000 meters; non-operating: below 15,000 meters
Pollution degree	2
Operating environment	In-door

Mechanical Specifications

Dimension (W×H×D)	378 mm×218 mm×120 mm
Weight	3.83 kg

Calibration interval

Calibration
interval 1 year

Safety Regulations

Compliance with EMC directive (2014/30/EU), compliance with or superior to
IEC 61326-1:2021/ EN61326-1:2021,
IEC 61326-2-1:2021/ EN61326-2-1:2021

Electromagnetic compatibility	Conducted disturbance	CISPR 11/EN 55011	CLASS B group 1, 150 kHz-30 MHz
	Radiation disturbance	CISPR 11/EN 55011	CLASS B group 1, 30 MHz-1 GHz
	(ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV (contact) , 8.0 kV (air)
	Radio sensitivity	IEC 61000-4-3/EN 61000-4-3	0V/m (80 MHz to 1 GHz) ; 3V/m (1.4 GHz to 2 GHz) ; 1V/m (2.0 GHz to 2.7GHz)
	Electrical fast transient (EFT)	IEC 61000-4-4/EN 61000-4-4	2kV (AC input)
	Surge	IEC 61000-4-5/EN 61000-4-5	1kV (live to zero) 2kV (live/zero to ground)
	Radio continuous sensitivity	IEC 61000-4-6/EN 61000-4-6	3V,0.15-80 MHz
	Voltage dip and short-term interruption	IEC 61000-4-11/EN 61000-4-11	Voltage dip: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles Short-term interruption: 0% UT during 250/300 cycles
	Safety specification	EN 61010-1:2010+A1:2019 EN IEC61010-2-030:2021+A11:2021 BS EN61010-1:2010+A1:2019 BS EN IEC61010-2-030:2021+A11:2021	

Remarks

1: only support standard HDMI, not support other adapters.

Order information




	Description	Order No.
Model	MSO3054X (500 MHz, 5 GSa/s, 4 analog channels)	MSO3054X
	MSO3034X (350 MHz, 5 GSa/s, 4 analog channels)	MSO3034X
Standard accessories	National standard cable x 1	
	USB3.0 cable x 1	UT-D30
	BNC-BNC direct-through line x 1	UT-L45
	BNC-red and black alligator connecting wire x 1	UT-L02A
	Passive probe (500 MHz/350 MHz) x 4	UT-P07A/UT-P08A
Optional accessories	350MHz Upgrade to 500MHz Bandwidth	MSO3000X-BW3M5T5M
	All serial bus triggering and decoding options	MSO3000X-BND
	Automobile serial bus triggering and decoding option (CAN, CAN-FD, LIN, FlexRay, SENT)	MSO3000X-AUTO
	Automotive serial bus triggering and decoding option CAN	MSO3000X-CAN
	Automotive serial bus triggering and decoding option CAN-FD	MSO3000X-CAN-FD
	Automotive serial bus triggering and decoding option LIN	MSO3000X-LIN
	Automotive Serial Bus Trigger and decoding Option FlexRay	MSO3000X-FLEX
	Automotive sensor serial bus triggering and decoding option SENT	MSO3000X-SENT
	Audio serial bus triggering and decoding option Audio	MSO3000X-AUDIO
	Aerospace serial bus triggering and decoding Option (MIL-STD-1553 and ARINC429)	MSO3000X-AREO
	Aerospace serial bus triggering and decoding Option MIL-STD-1553	MSO3000X-MIL1553
	Aerospace serial bus triggering and decoding Option ARINC429	MSO3000X-ARINC429
	Wireless communication serial bus triggering and decoding option MANCHESTER	MSO3000X-MANCH
	Bode plot loop analysis	MSO3000X-BODE








Dual channel function/arbitrary waveform generator	MSO3000X-AWG
Power analysis	MSO3000X-PWR
Isolation transformer	UT-ISOT
High voltage probe	UT-V23/UT-P21/UT-P20
High voltage differential probe	UT-P30/UT-P31/UT-P32/ UT-P33/UT-P35/UT-P36
Active probe single-end	UT-PA2000
Current probe	UT-P40/UT-P41/UT-P42/ UT-P43/UT-P44/UT-P403 0D/UT-P4150/UT-P4500/ P4100A/P4100B
16-channel logic analyzer probe	UT-M15

Remarks: Please order all hosts, accessories and options from your local UNI-T distributor.

Oscilloscope's probe and accessory

Passive probe

Model	Type	
UT-P01	High resistance probe	1X: DC ~ 8 MHz 10X: DC ~ 25 MHz Oscilloscope compatibility: all series of UNI-T
		
UT-P03		1X: DC ~ 8 MHz 10X: DC ~ 60 MHz Oscilloscope compatibility: all series of UNI-T
		
UT-P04	High resistance probe	1X: DC ~ 8 MHz 10X: DC ~ 100 MHz Oscilloscope compatibility: all series of UNI-T
		
UT-P05	High	1X: DC ~ 8 MHz






	resistance probe	10X: DC ~ 200 MHz Oscilloscope compatibility: all series of UNI-T
<p>UT-P06</p> 	High resistance probe	1X: DC ~ 8 MHz 10X: DC ~ 300 MHz Oscilloscope compatibility: all series of UNI-T
<p>UT-P07A</p> 	High resistance probe	10X: DC ~ 500 MHz Input resistance: 10 MΩ Maximum of operating voltage: <600V pk Oscilloscope compatibility: all series of UNI-T
<p>UT-P08A</p> 	High resistance probe	10X: DC ~ 350 MHz Input resistance: 10 MΩ Maximum of operating voltage: <600V pk Oscilloscope compatibility: all series of UNI-T
<p>UT-P20</p> 	High resistance probe	DC ~ 100 MHz Probe coefficient 100:1 Maximum of operating voltage: 1500 Vrms Oscilloscope compatibility: all series of UNI-T
<p>UT-V23</p> 	High voltage probe	DC ~ 100 MHz Probe coefficient 100:1 Input resistance: 100 MΩ±2% Maximum of operating voltage: 2000 Vpp Oscilloscope compatibility: all series of UNI-T
<p>UT-P21</p> 	High voltage probe	DC ~ 50 MHz Probe coefficient 1000:1 Maximum of operating voltage: DC 15 kVrms, AC 10kV (sine wave) Oscilloscope compatibility: all series of UNI-T



Current probe

Model	Type	
UT-P40		
	Current probe	DC ~ 100 kHz Range: 50 mV/A, 5 mV/A Current range: 0.4 A ~ 60 A Maximum of operating voltage: 600 Vrms Oscilloscope compatibility: all series of UNI-T
UT-P41		
	Current probe	DC ~ 100 kHz Range: 100 mV/A, 10 mV/A Current range: 0.4 A ~ 100 A Maximum of operating voltage: 600 Vrms Oscilloscope compatibility: all series of UNI-T
UT-P42		
	Current probe	DC ~ 150 kHz Range: 100 mV/A, 10 mV/A Current range: 0.4 A ~ 200 A Maximum of operating voltage: 600 Vrms Oscilloscope compatibility: all series of UNI-T
UT-P43		
	Current probe	DC ~ 25 MHz Range: 100 mV/A Maximum test current: 20 A Rising time: 14 ns Oscilloscope compatibility: all series of UNI-T
UT-P44		
	Current probe	DC ~ 50 MHz Range: 50 mV/A Maximum test current: 40 A Rising time: 7 ns Oscilloscope compatibility: all series of UNI-T
UT-P4030D		Bandwidth: DC~100 MHz

	<p>High-frequency current probe</p>	<p>Rising time: ≤ 3.5 ns Range selection: 30 A/5 A Maximum test current: 30A Voltage of insulated line: 300V CAT I Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4150</p> 	<p>High-frequency current probe</p>	<p>Bandwidth: DC~12 MHz Rising time: ≤ 29 ns Range selection: 150 A/30 A Maximum test current: 150A Voltage of insulated line: 600V CAT II 300V CAT III Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4500</p> 	<p>High-frequency current probe</p>	<p>Bandwidth: DC~5MHz Rising time: ≤ 70 ns Range selection: 500 A/75 A Maximum test current: 500 A Voltage of insulated line: 600V CAT II 300 V CAT III Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4100A</p> 	<p>Low-frequency current probe</p>	<p>Bandwidth: DC~ 600kHz Rising time: ≤ 583 ns Maximum test current: 100A Range selection: 100A/10A Range sensitivity: 0.01V/A Common-mode voltage RMS: CAT I 600V CAT II 600V CAT III 300V Oscilloscope compatibility: all series of UNI-T</p>
<p>UT-P4100B</p> 	<p>Low-frequency current probe</p>	<p>Bandwidth: DC~ 2 MHz Rising time: ≤ 175 ns Maximum test current: 100 A Range selection: 100 A/10 A Range sensitivity: 0.01 V/A Common-mode voltage RMS: CAT I 600V CAT II 600V CAT III 300V Oscilloscope compatibility: all series of UNI-T</p>

Active probe

Model	Type
UT-PA2000 	10X: DC~2 GHz; Input capacitance: ≤ 1 pF Dynamic range: $\pm 7V$ (DC or peak AC) Oscilloscope compatibility: MSO7000X/MSO3000X/MSO3000HD series
UT-P30 	DC ~ 100 MHz Attenuation ratio 100:1,10:1 Input differential-mode voltage: $\pm 800V_{pp}$ Oscilloscope compatibility: all series of UNI-T
UT-P31 	DC ~ 100MHz Attenuation ratio 1000:1,100:1 Input differential-mode voltage: ± 1.5 kVpp Oscilloscope compatibility: all series of UNI-T
UT-P32 	DC ~ 50MHz Attenuation ratio 1000:1,100:1 Input differential-mode voltage: ± 3 kVpp Oscilloscope compatibility: all series of UNI-T
UT-P33 	DC ~ 120MHz Attenuation ratio 100:1,10:1 Input differential-mode voltage: ± 14 kVpp Oscilloscope compatibility: all series of UNI-T

UT-P35		DC ~ 50MHz	
		Attenuation ratio 500:1,50:1	
		Rising time: 7ns	
		Accuracy: 2%	
	High voltage differential probe	Input differential-mode voltage:	
		1/50:130(DC+peakAC)	
		1/500:1300(DC+peakAC)	
		Input common-mode voltage:	
		100Vrms,CAT I 600Vrms,CAT II	
		Oscilloscope compatibility: all series of UNI-T	
UT-P36		DC ~ 50MHz	
		Attenuation ratio 2000:1,200:1	
		Rising time: 3.5ns	
		Accuracy: 2%	
	High voltage differential probe	Input differential-mode voltage:	
		1/200:560 (DC+peakAC)	
		1/2000:5600 (DC+peakAC)	
		Input common-mode voltage:	
		2800Vrms,CAT I 1400Vrms,CAT II	
		Oscilloscope compatibility: all series of UNI-T	

Limited Warranty and Liability

Uni-T guarantees that the product is free from any defect in material and workmanship within three years from the purchase date. This warranty does not apply to damages caused by accident, negligence, misuse, modification, contamination or improper handling. If you need warranty service within the warranty period, please contact your seller directly. Uni-T will not be responsible for any special, indirect, incidental or subsequent damage or loss caused by using this device. Visit instrument.uni-trend.com for full warranty information.

Learn more at: www.uni-trend.com

UNI-T is the licensed trademark of UNI-TREND TECHNOLOGY CO., Ltd. The product information in this document subject to update without notice. For more information on UNI-T Test & Measure Instrument products, applications or service, please contact UNI-T instrument for support, the support center is available on www.uni-trend.com -> instruments.uni-trend.com
<https://instruments.uni-trend.com/ContactForm/>



Copyright © MSO3000X-2024-03 by UNI-T

All Rights Reserved.