

CIRCUIT BREAKER FINDERS

AUTOMATICALLY FINDS BREAKERS AND FUSES ON 120V AC CIRCUITS

- cULus 1436 Listed
- Transmitter Triple Function - Signal Transmitter, Receptacle Tester & GFCI Trip Test (61-534 only)
- Receiver Dual Function - Breaker Finder and Non-Contact Voltage Tester (61-534 only)
- Includes transmitter, receiver and battery



GFCI Trip



Non-Contact Voltage Tester



LED Indicators



Audible Tone



Polarity & Live Circuit Indication



Live Circuit Indication

61-534

61-532




Scan this QR code with your smartphone to see a video to learn more about the tester.



Lead Adapter Kit

Provides adapters for use in lighting fixtures.

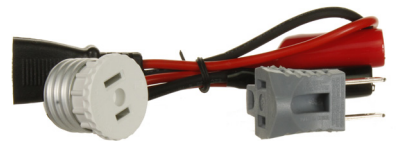

TL-532A

Test Lead & Adapter Kit (sold separately)

CIRCUIT BREAKER FINDERS



61-534

Transmitter

Triple Function - Signal Transmitter, Receptacle Tester & GFCI Trip Test



61-534

Receiver

Dual Function - Breaker Finder and Non-Contact Voltage Tester



61-532

Transmitter



61-532

Receiver

Specifications are subject to change without notice.

CIRCUIT BREAKER FINDER SELECTION GUIDE



TRANSMITTER FEATURES	61-534	61-532
CAT Rating (Safety)	CAT II 300V	CAT II 300V
Listing	UL 1436	UL 1436
Line Voltage	Line Powered (120V AC only)	Line Powered (120V AC only)
Supply Frequency	47-63Hz	47-63Hz
Weight	50g (approx.)	50g (approx.)
Pulse Amplitude	18A (approx.) @ 120V	18A (approx.) @ 120V
Pulse Rate	4mS every 17ms (@ 60Hz)	4mS every 17ms (@ 60Hz)
Power Consumption	200mW max. @ 120V AC	200mW max. @ 120V
Operating Temperature	32° - 122°F (0 to 50°C)	32° - 122°F (0 to 50°C)
GFCI	✓	—
Polarity Indication	✓	—
RECEIVER FEATURES		
Visual and Audible Indicators	✓	✓
Low Battery Indication	✓	✓
Auto Power Off (after 10 mins. of no activity)	✓	✓
Battery Type	9V	9V
Weight	0.2 lbs. (w/o battery)	0.2 lbs. (w/o battery)
Warranty	2-Year*	2-Year*
ACCESSORIES		
Light Socket and 3-prong to 2-prong Adapters, Alligator Clips	TL-532A	TL-532A



IDEAL INDUSTRIES, INC.

IDEAL INDUSTRIES, INC.

1800 S. Prairie Drive, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:

Australia • Canada • China • India • Mexico • UK

For complete sales office contact information, visit us at:

www.idealind.com