

The side mount M8750 Series liquid level switch is designed for liquid level sensing for a wide variety of fluids and conditions. These hermetically sealed float switches provide years of dependable sensing at an economical cost. Used with standard  $1/2"$  NPT threaded stem, these plastic switches provide control signals for many different liquid level sensor applications. Any of our side-mounted float switches can easily be mounted through the wall of a tank as a high or low level float switch.

### Custom Configurations

Contact us directly for custom solutions.  
Email: [info@madisonco.com](mailto:info@madisonco.com)

### Applications

- Low temperature food processing applications as a single point liquid level float switch
- Steam tables and condensate pans to monitor high/low levels
- Single point low level float switch for pump dry protection

### Materials

- Stem and Float: Polypropylene

### Specifications

- Mounting:  $1/2"$  NPT
- Max. temperature:  $221^{\circ}\text{F}$  /  $105^{\circ}\text{C}$
- Max. pressure: 100 psi

### Lead Wires

- 24", 22 AWG, MTW insulated

### Electrical Ratings

- 240V AC, 0.14A; 120V AC, 0.28A;  
120V DC, 0.07A; 24V DC, 0.28A

Part Number	Minimum Media SG	Switch Rating	Approvals
M8750	0.63	30 watt, SPST	CE, UL, CSA, NSF

NOTE: Other fittings and voltages are available. [Contact us](#) to discuss your application.

Level Switch Electrical Considerations and Reed Switch Protection

When using Madison level switches, it is important to consider the application’s electrical parameters. Our level switches utilize reed switch technology, which are glass encapsulated, magnetically actuated switches. Madison generally provides electrical ratings for resistive loads; however, where the maximum current of the load permits, the switches are capable of controlling devices such as motors, solenoids or coils that produce capacitive or inductive electrical loads. Where possible, Madison recommends the use of general-purpose/isolation relays or controllers to protect the switch.

Protect your level switch: Protection Techniques and Common Failure Modes

Reed Switch protection is the most successful method of increasing the performance and life of your level sensor. Since every application varies, it is important to understand your protection options. The life of the reed switch is typically 1 million cycles, within rated load conditions. The table below is a guide to suggested protection techniques and common failure modes associated with each load type.

Load	Load Example	Protection	Diagram	Common Failure Modes	Failure Mode Description
Resistive (DC)	Indicator Lamp, Heaters	Current Limiting Resistor	A	In-rush Current (Switching)	In-rush current exceeds rating and welds switch closed
				Over-Current (Carry)	Carry-current exceeds rating and switch welds or burns open like a fuse
Inductive & Capacitive (DC)	Relay Coil, Solenoids, Motor	Reversing Diode	B	Over-Voltage (Arcing)	Voltage arcing during switching welds contacts closed
Inductive & Capacitive (AC or DC)		Resistor & Capacitor Network	C		
Resistive, Inductive & Capacitive (AC or DC)	Indicator Lamp, Heaters, Relay Coil, Solenoids, Motor	Varistor or MOV	D	Over-Voltage (Arcing)	Transients voltage spikes exceed breakdown voltage and weld switch closed

Capacitive Load

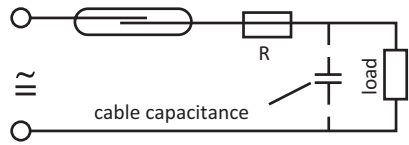


Diagram A: Current Limiting Resistor

Inductive Load

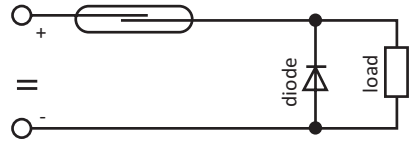


Diagram B: Reversing Diode

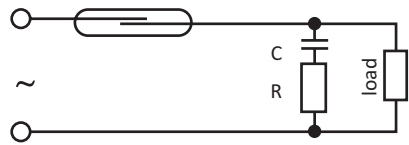


Diagram C: RC Network

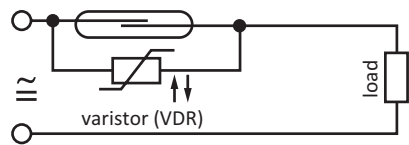


Diagram D: Varistor or MOV

For DC circuits: Insert a 1N4004 diode across the load (i.e.: relay coil) with the cathode end (marked with circular line) connected toward the positive side. This way the diode conducts only when the field collapses. General rule is to use a diode with a voltage rating at least three times the circuit voltage. A 1N4004 has a rating of 1 amp continuous, 30 amp surge, 400V max. Refer to diagram B.

For typical 120V AC circuits: Insert a 50 to 100 ohm, 1/2 watt Resistor in series with a .1 micro farad 400 to 600 volt capacitor across the switch. The capacitor is a high impedance to 60 hertz, but is essentially a short circuit to high frequencies of generated voltages. Alternately, a varistor V130LA10A by itself across the switch will also work for 120V AC. Refer to diagram D.



Madison Company | Sensing Solutions since 1959

27 Business Park Drive  
Branford, CT 06405 USA

Toll-Free: 800.466.5383  
Outside the USA: +1.203.488.4477



www.madisonsensors.com