


# Creating a Differential Signal with a Waveform Generator

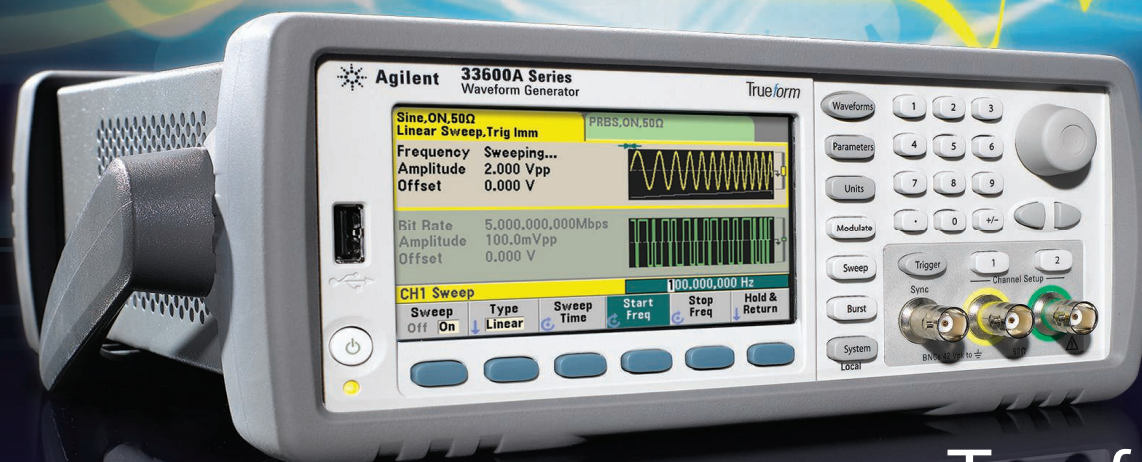

## Test Challenge Examples:

- Simulating an IC output
- Simulating balance twisted pair outputs
- Simulating a biomedical signal
- Generating an LVDS stimulus signal

## How Trueform Can Help:

- Dual channels
- Frequency or amplitude coupling
- Identical or inverted signals between two channels
- Floating outputs up to 42 V
- 1 mVpp to 10 Vpp outputs

Differential signals have many advantages over single-ended signals; namely, fewer timing errors, better signal-to-noise ratio, and better immunity to electromagnetic noise. However, creating a differential signal from previous generation Agilent waveform generators with single-ended outputs is not intuitive or even possible. Trueform waveform generators now make creating a differential signal easier and much more cost effective.



## CREATING A DIFFERENTIAL SIGNAL WITH A WAVEFORM GENERATOR

See our test challenges below to learn how Trueform waveform generators can help you create differential signals for a variety of applications:

### Simulating an IC output

Test signals are used by engineers to try out their designs. If you are designing analog or digital circuits, or want to reproduce your integrated circuit's output signal, a waveform generator should be your first choice. Using that generator to generate a differential signal; however, might give you second thoughts. Dual-channel Trueform waveform generators can simulate your test signals, even if they are differential. You can capture your signals with an oscilloscope, and then use the Trueform generator to accurately simulate the waveform as a differential signal on your bench. The arbitrary waveforms generated by the Trueform generators output each point without skipping or adding points like DDS-based generators.

### Simulating a biomedical signal

When simulating a biomedical signal such as a heart rate to test your equipment, your requirements will include an isolated differential signal and small-amplitude levels. The dual-channel Trueform waveform generators can create small-amplitude, differential signals and do not require an external attenuator. Output levels as low as 1 mV peak-to-peak can be used. The generators even feature a standard cardiac arbitrary waveform in an internal library. Using the 33600A Series Trueform waveform generators, you not only simplify your system design, but also gain the ability to more accurately create versatile test waveforms.

### Simulating balanced twisted pair outputs

You need to simulate a balanced, twisted differential pair. The differential pair signals require equal and opposite polarity, and must be tightly timed together. Like any good engineer you want the simulation to be accurate, the development time to be efficient, and the cost to be low. Thanks to the versatility of the Trueform waveform generators, all of your needs can now be met. Dual-channel models make creating a differential pair signal easy, while arb generation tools speed up your development time. Moreover, by adjusting the load impedance setting of the generator to match your load circuit's impedance, you can be assured the amplitude of your waveform will be correct.


### Generating a LVDS stimulus signal

Do you need help generating a Low-Voltage Differential Signaling (LVDS) output test signal? Such signals are typically implemented as constant current 3.5-mA signals that terminate into a 100- to 120-ohm load. With Trueform waveform generators, you can now simulate LVDS signals even though waveform generators are typically constant voltage instruments. All you have to do is change the generator's load setting to match your load impedance (see additional details below). With up to 120-MHz of bandwidth and voltage settings ranging from 1 mVpp to 20 Vpp (into high impedance loads), Trueform waveform generators are ideal for helping you reproduce the signals you need.

### Easy creation of differential signals

In the simplest terms, a differential signal is made up of a pair of wires devoted to a single signal. One path is at a higher potential than the other. Trueform waveform generators have dual-channel isolated outputs that are referenced to the outer shell. In order to combine the two channels into a single differential output, you must connect the two common connections (the connector shells) of each channel. The middle pin (signal pin) of one channel is used as the high signal path of the differential signal, while the signal pin of the other channel is used as the inverse return path. You can connect the connector shells to a cable shield if you would like additional shielding or a ground connection.

With the Trueform waveform generators (both the 33500B Series and 33600A Series dual-channel units), it is easy to mirror the two signals to create a differential signal. Simply use

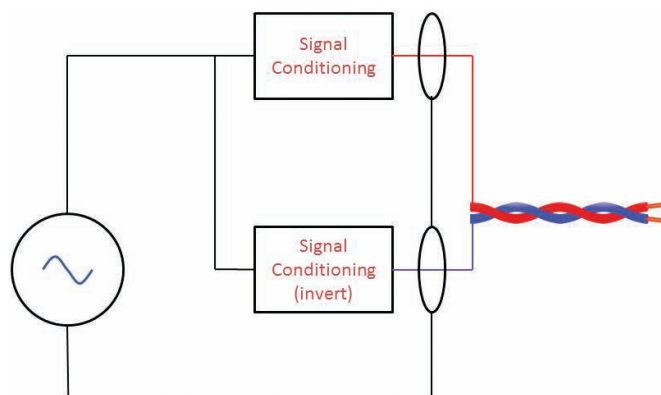

**Figure 1.** Differential signal block diagram.


## CREATING A DIFFERENTIAL SIGNAL WITH A WAVEFORM GENERATOR

the inverted tracking capability enabled when the generator is in Dual-Channel Operation mode. This mode may be activated from either the Channel 1 or Channel 2 Output menu.

The Inverted tracking mode causes Channel 2 to be a mirror image of the signal from Channel 1, which is exactly what you need for a differential signal. Once you have this enabled, all you have to do is set up your signal on Channel 1. It will then be automatically inverted on Channel 2, creating your differential signal.

33500B Series dual-channel models	33600A Series dual-channel models
33510B (20 MHz)	33612A (80 MHz, Arb)
33512B (20 MHz, Arb)	33622A (120 MHz, Arb)
33520B (30 MHz)	
33522B (30 MHz, Arb)	

**Table 1.** 33500B/33600A dual-channel Trueform waveform generators.

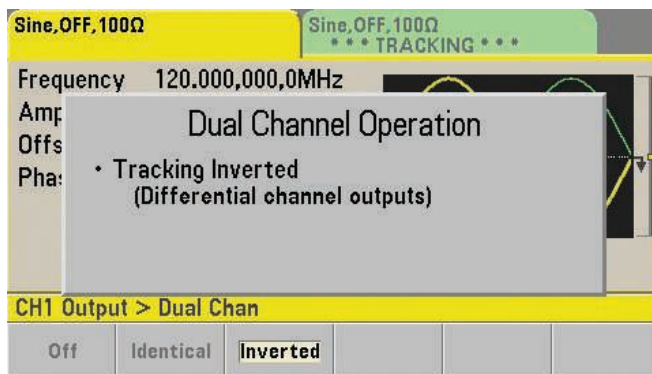

**Figure 2.** Channel tracking menu.


### Measurement Tip:

Don't forget to set the load impedance of your output channels. Doing so will enable the generator to accurately determine the voltage output to match your load impedance. Go to **Channel 1 > Output Load** to enter your circuit's load impedance.

## Reproduce differential signals from your design


Reproducing the actual signal from your design can help you isolate your test circuit. Using a Trueform waveform generator to perform this task offers a number of key benefits, including the ability to change your signal's frequency, amplitude and offset. With Trueform generators' arb reproduction capability, even glitches from your design are reproduced accurately.

To recreate your signal, first capture it using an oscilloscope with trace saving features. The 33600A Series Trueform waveform generator recreates signals with 1 GSa/s resolution. Modern Agilent scopes can be used to save your signal to a .csv file. Once saved, a USB thumb drive or the 33600A Series' USB drag and drop feature moves the file to your Trueform

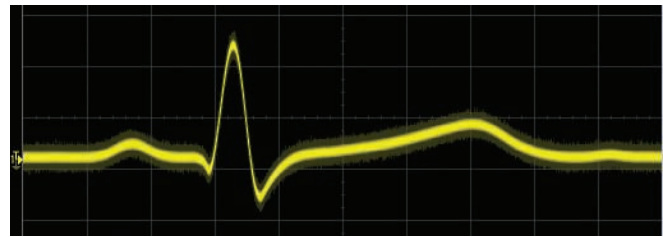


**Figure 3.** Reproduction of an actual design signal.

waveform generator. You can then import the data in the **Waveforms > Arbs** menu. For a differential signal, the data will be a single channel arb. The process above can then be used to recreate the output as a differential signal.

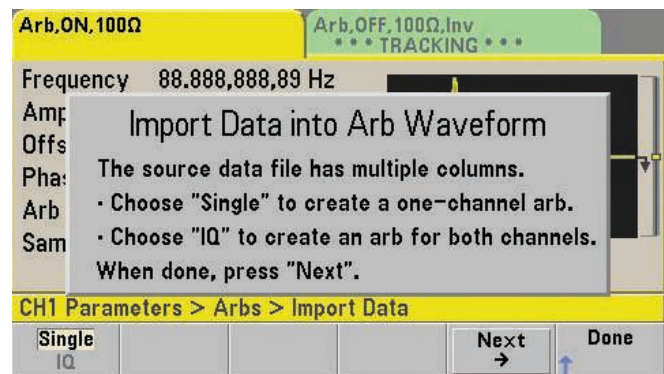

**Figure 4.** Importing data into an arb waveform.

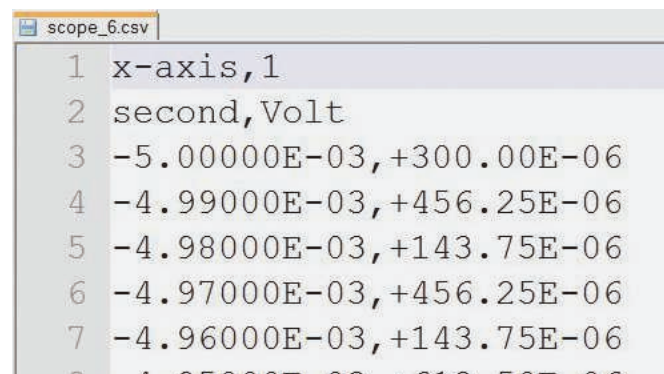

**Figure 5.** Saving a signal to a .csv file.

### Measurement Tip:

You can directly output scope trace files if you rename the extension from .csv to .dat files. Trueform waveform generators recognize .dat formats as arb files and can load them without the import data process.

### Measurement Tip:

If you'd like to design a signal, consider using Agilent's Benchlink Waveform Builder Pro software to build your signals. For more information on the software visit: [www.agilent.com/find/33503](http://www.agilent.com/find/33503)



## Summary

Simulating differential signals can be simple using Trueform waveform generators. You just recreate your own signals with an oscilloscope, capture and then output the data using a Trueform waveform generator. With this process you gain greater flexibility in your signal generation.



## See the Trueform waveform generator test challenge web site for additional topics such as:

- Generating a waveform with many points
- Simulating signals with the highest integrity
- Effortlessly couple or synchronize two signals on a waveform generator
- Using a waveform generator to generate a PRBS signal
- Be more efficient designing and using your arbitrary waveforms

[www.agilent.com/find/trueformTC](http://www.agilent.com/find/trueformTC)

For 33600A Series Trueform waveform generator product information visit [www.agilent.com/find/33600A](http://www.agilent.com/find/33600A)



### myAgilent

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



### [www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.



### Three-Year Warranty

[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Beyond product specification, changing the ownership experience. Agilent is the only test and measurement company that offers three-year warranty on all instruments, worldwide.



### [www.agilent.com/quality](http://www.agilent.com/quality)

Agilent Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/trueformTC](http://www.agilent.com/find/trueformTC)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

(BP-01-15-14)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2014  
Published in USA, April 9, 2014  
5991-3992EN



**Agilent Technologies**