

Agilent Models 6690A-6692A System DC Power Supply

Data Sheet



Minimize your testing downtime with this reliable, high power DC supply

- Low ripple & noise
- Fast up-and-down programming
- High accuracy current programming and read back
- Industry standard SCPI programming commands
- Analog programming
- Analog monitoring
- Parallel connection for more current output
- Full protection from overcurrent, overvoltage overtemperature
- Remote sense
- Electronic calibration



Agilent Technologies

You Have Better Things to Worry About than DC Power.

Will failure of your DC power supply delay your testing?

Will failure of your DC power supply damage your DUT?

Will failure of your DC power supply keep you from meeting your customers' needs?

The 6690A Series is DC power you can depend on.

At the 6600 watt power level, it's not easy to design a reliable DC power supply. Agilent Technologies builds in ruggedness and durability, to meet even the grueling needs of continuous stress testing in harsh environments. During the development phase, Agilent power supplies undergo a battery of environmental tests such as 8-days temperature profile. Other tests include humidity, altitude, shock and vibration, ESD, AC line tests, EMC and RFI. The power supplies are designed with built-in margin so that they can meet their specifications over time, under all conditions, and withstand peak stress.

Protect your DUT

At these high power levels, you want to protect your expensive DUT. Whether your DUT is a rack of data storage control units, or a base station ready for deployment, it is quite valuable and well worth recovery. The 6690 Series has a wide range of protection features available to protect your DUT from damaging conditions.

- Overvoltage protection
- Overcurrent protection
- Overtemperature protection
- Programmable shut-down
- Error status reporting
- DFI-RI
- External TTL shut-down input
- Linked power supply shutdown

Easy GPIB programming

All Agilent system power supplies have SCPI (Standard Commands for Programmable Instruments) based command sets. This means that the same function would have the same command for any instrument. For example, to program the output voltage on two power supplies, the command would be the same, and to measure the output voltage the command would be the same for the Agilent system power supply as any SCPI voltmeter. Using SCPI instruments makes your software simpler and quicker to design.

Easy system configuration and enhancement

The 6600 watt DC power supplies of the Agilent 6690 Series are the same size as the 5000 watt power supplies of the Agilent 6680 Series. This means that system power can be upgraded without needing more rack space. All programming commands and features are 100% compatible between both series. Also, up to three same model 6690 Series power supplies can be connected in parallel, to provide additional power as your needs expand.

Manual power supply control

Non-automated testing in R&D, or power for the repair bench in manufacturing, are no problem for the 6690 Series. The front panel has everything that is needed to control both the power supply output and the associated protection features. Both the output voltage and current can be easily monitored on the front panel meters.

Analog programming and monitoring

Analog signals can be used to program the output voltage and current. This allows custom waveforms to be generated, and is also useful for process control applications. The output current and voltage can be monitored via analog signals on the rear panel, for custom interface applications, and process control implementations.

Specifications

Parameter	Agilent model number			
	6690A	6691A	6692A	
Output ratings				
Voltage	0-15 V	0-30 V	0-60 V	
Current*	0-440 A	0-220 A	0-110 A	
*Derated linearly 1%/°C from 40 to 55 °C				
Programming accuracy (@ 25 ±5 °C)				
Voltage	0.04% +	15 mV	30 mV	60 mV
Current	0.1% +	230 mA	125 mA	65 mA
Ripple & noise				
(from 20 Hz to 20 MHz with outputs ungrounded, or with either output terminal grounded)				
Constant Voltage	rms	2.5 mV	2.5 mV	1.5 mV
Constant Voltage	p-p	15 mV	25 mV	25 mV
Constant Current**	rms	200 mA	50 mA	30 mA
**With load inductance > 5 µH				
Readback accuracy				
(from front panel or over GPIB with respect to actual output @ 25 ±5 °C)				
Voltage	0.05% +	22.5 mV	45 mV	90 mV
±Current	0.1% +	300 mA	165 mA	80 mA
Load regulation				
(change in output voltage or current for any load change within ratings)				
Voltage	0.002% +	650 µV	1.1 mV	2.2 mV
Current	0.005% +	40 mA	17 mA	9 mA
Line regulation				
(change in output voltage or current for any line change within ratings)				
Voltage	0.002% +	650 µV	650 µV	650 µV
Current	0.005% +	40 mA	17 mA	9 mA
Transient response time				
(for the output voltage to recover to within 150 mV following any step change from 100% to 50% or 50% to 100% of the rated output current): < 900 µs				

Supplemental characteristics

DC floating voltage: Output terminal can be floated up to ± 60 VDC from chassis ground

Remote sensing: Up to half the rated output voltage can be dropped in each load lead. The drop in the load leads subtracts from the voltage available at the load.

Command processing time: Average time required for the output voltage to begin to change following receipt of digital data is 20 ms for power supplies connected directly to the GPIB.

Modulation: (analog programming of output voltage and current):

Input signal: 0 to -5 V for voltage, and 0 to $+5$ V for current.

Input impedance: 30 k Ω or greater.

AC input (47 to 63 Hz): 180 to 235 VAC (line-to-line 3 phase) 36 Arms maximum worst case, 28 Arms nominal; 360 to 440 VACX, 18 Arms maximum worst case, 14 Arms nominal. (Maximum line current includes 5% unbalanced phase voltage condition).

CD ships with: IVI and VXI Plug n Play drivers, Operating, Programming, Service and Quick Start Guides.

Input power: 9000 VA and 7950 W maximum; 175 W at no load.

Size: 425.5 W x 221.5 H x 674.7 mm D (16.75 x 8.75 x 25.56 in).

Specifications (at 0 to 55 °C unless otherwise specified)	6690A	6691A	6692A
--	-------	-------	-------

Supplemental Characteristics
(Non-warranted characteristics determined by design that are useful in applying this product)

Ripple and noise constant current mode
from 20 Hz to 20 MHz

rms	200 mA	50 mA	30 mA
-----	--------	-------	-------

Average programming resolution

Voltage	4.1 mV	8.1 mV	16 mV
Current	118.5 mA	59 mA	30 mA
OVP	90 mV	170 mV	330 mV

Output voltage programming response time (excludes command-processing time)
Full-load programming rise or fall time (10 to 90% or 90 to 10%, resistive load)

Output common-mode

rms	3 mA	3.5 mA	4 mA
noise current (to signal-ground binding post)	peak-to-peak 20 mA	20 mA	25 mA

Ordering information

Option 208 180 to 235 VAC, 3 phase, 47 to 63 Hz

Option 400 360 to 440 VAC, 3 phase, 47 to 63 Hz

Option 602 Two bus bar spacers for paralleling power supplies (p/n 5060-3514)

Option 1CM028A Rackmount flange kit 88.1 mm H (3U) and 132.6 mm H (2U) - 4 brackets (5U total)

Option 1CP014A Double rackmount flange and Handle Kit 88.1 mm H (2U) and 132.6 mm H (3U)

Accessories


5065-6935 Replacement fuse kit for 360-440 VAC line.

5065-6934 Replacement fuse kit for 180-235 VAC line.

E3663AC Support rails for Agilent rack cabinets.

5080-2148 Serial link cable 2 m (6.6 ft.)

Agilent models: 6690A, 6691A, 6692A

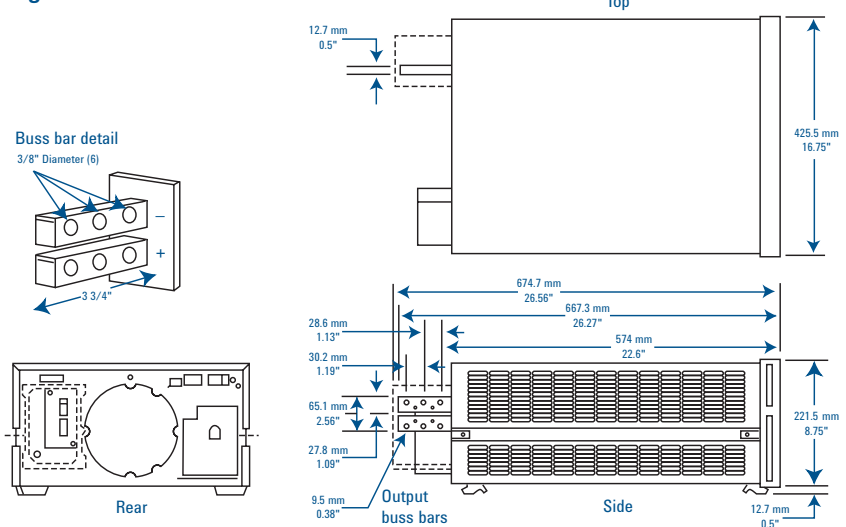



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices

www.agilent.com
www.agilent.com/find/power

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 131 452 0200

For other unlisted countries:

www.agilent.com/find/contactus

Revised: June 8, 2011

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2011
Published in USA, December 5, 2011
5988-3149EN



Agilent Technologies