

Standard Features

- **Protection Level:** IP54* / IP65**
- **Technical:**
 - Knockout Sidewalls
 - Tinted Transparent Door
 - Multiple Enclosure Combination Option
- **Enclosure Material:** Polystyrene
- **Door Material:** Polycarbonate
- **Gasket Material:** Polyurethane
- **Temperature Range:** -40°C to 70°C (-40°F to 158°F)
- **Color:** Light Gray
- **Included Accessories:**
 - 35mm DIN Rail, 5 Pole Ground/Neutral Terminal Strip
 - 4 ea. 9mm (0.35 in.) Filler Strips
 - 2 ea. Pg21 and 3 ea. Pg16 Entry Spouts
 - Label Strip
- **Accessories:** See section below



* With Supplied Entry Spouts

** As Equipped or With Optional IP65 Cable Glands

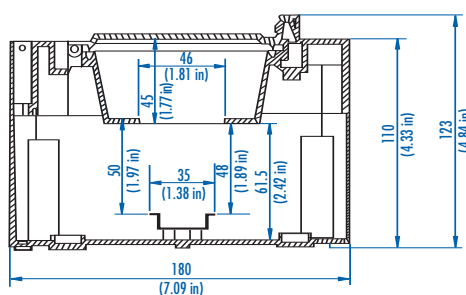
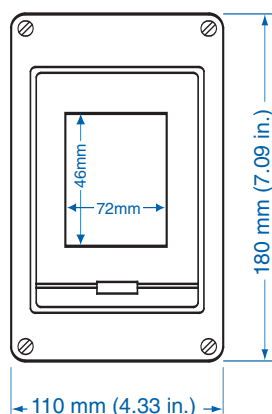

EK

Ordering Information	Cat. No.	Type	Length	Dimensions mm (in)	Height	Std. Pk.
Enclosure	542-404	EK004	180 mm (7.09 in)	Width	110 mm (4.33 in)	1

Accessories

Ordering Information	Cat. No.	Type	Std. Pk.
Key Lock	548-102	KL	1
Terminal	X-575	PE/N Terminal - 5 pole	1

Please refer to pages 106-113 for additional accessories and detailed information.

**Knockout Detail**

Pg11



Pg13.5



Pg16



Pg21/16



Pg29/21



Pg36/29