

Dino-Lite US | Dunwell Tech, Inc

sales@dunwell.com 888-668-2442 19803 Hamilton Ave Torrance, CA 90502








# AF3113T

## \$299

### **Product Images**

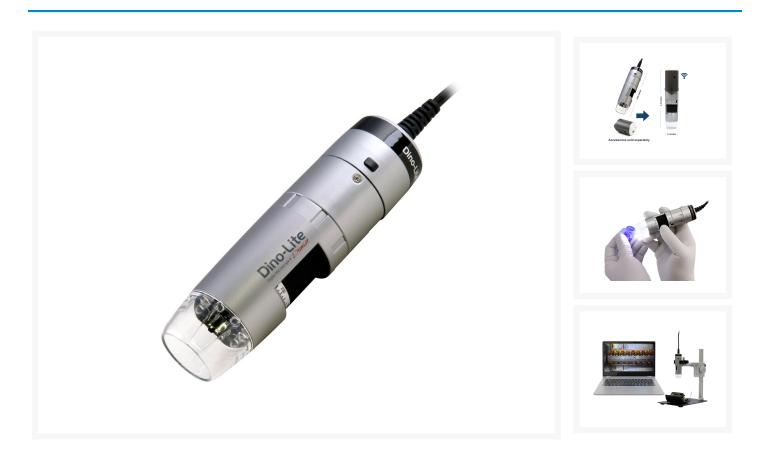

### Description

The Dino-Lite Premier 0.3MP AF3113T is designed to meet most applications within 20x- 220x magnifications with LED brightness control. The new modular wireless-ready design allows for USB connection or a quick swap to wireless with a WF-20 adapter (sold separately) making it a completely cordless and portable microscope.

This model is wireless-ready but requires the WF-20 adapter for wireless functionality. To purchase this model with the WF-20 adapter see AF3113T + WF-20 Bundle

#### Additional Information

Measurement	Yes
Flexible LED Control	LED Brightness Control Only
Automatic Magnification Reading	No
Extended Depth of Field	No
Enhanced Dynamic Range	No
Wireless Ready	Yes
Magnification Lock	Yes
Body Material	ABS Plastic
Microtouch Sensor	Yes
LEDs	White (8)
Axial	No
Polarization	No
Excitation Wavelength (LED)	N/A
Emission Wavelength (Filter)	N/A
Magnification Range	10x - 50x, 230x
Working Distance	Standard
Lens Type	Glass
Megapixels	0.3 MP
Image Save Formats (Windows)	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA, PCX, MNG, WBMP, JP2, JPC, PGX
Image Save Formats (Mac OS)	JPEG, PNG
Video Save Formats (Windows)	WMV, FLV, SWF
Operating System	Windows XP, Vista, 7, 8, 10, Mac OS 10.11.6 or newer
Connection Type	USB 2.0
Included Software	DinoCapture 2.0 (Windows), DinoXcope (Mac OS)
Imaging Standards	UVC
Sensor Type	CMOS
Resolution	640 × 480 pixels

Frame Rate (max)	30 FPS
Dimensions	11.4cm (H) x 3.3cm (D) (4.4" x 1.29")
Weight	111g (3.9 oz)
Cable Length	182cm (71.65 in)
Package Includes	Microscope, Carry Pouch, Software CD, Edge Calibration Target, Alternate end caps
Warranty Period	2 years
Manufactured in	Taiwan
Service & Support	U.S. (www.dinolite.us) English & Spanish
Regulatory Approval	CE, FCC

