


#### **Hollow Heater Soldering Tools and Stations**


Part No.	Description	
930	Soldering Station with CL1080 Soldering Tool and IP329 Base	
935	Soldering Station with CL1080 Soldering Tool and PS536 Power Supply	
951DX-230	Deluxe Soldering Station (includes all 230V models)	
951SX	Soldering Station (includes all 230V models)	
952DX-230	Dual Deluxe Soldering Station (includes all 230V models)	
952SX	Dual Soldering Station (includes all 230V models)	
CL1080	Temperature Controlled Soldering Tool	
CL1180	Temperature Controlled Soldering Tool	
CL1280I	Temperature Controlled Soldering Tool (230V)	
CL1580I	Temperature Controlled Soldering Tool (230V)	



### Hollow Threaded Heater Soldering Tools and Stations

#### Part No. Description

CL1481 Constant Temperature Soldering Tool



#### **Hollow Heater Soldering Tools and Stations**

Part No. Description


PSS2000 Hybrid Portable Soldering System



Hollow Heater LTC7 Collet Soldering Tip RCS7 Retaining Sleeve
NOTE: Loosen collar when changing tips.
DO NOT remove sleeve.

#### Front Loading Hollow Heater Soldering Tools and Stations

Part No.	Description
971	Deluxe High Performance Soldering Station (includes all 230V models)
971DX-230	Deluxe High Performance Soldering Station (includes all 230V models)
2020	Microprocessor Controlled Digital Soldering Station (includes all 230V models)









Front Loading Hollow Heater

LTC71 Collet

RCS71 Retaining Sleeve
NOTE: Loosen collar when changing tips.
DO NOT remove sleeve.

Soldering Tip

www.edsyn.com





General Purpo	ose Spade Tips		B
Part No.	Tip Image	Width A	Length B
LT375		.06" (1.5mm)	.48" (12.2mm)
LT376		.12" (3.0mm)	.48" (12.2mm)
LT394		.07" (1.8mm)	.93" (23.6mm)
LT395		.069" (2.3mm)	.74" (18.8mm)
LT431		.07" (1.8mm)	.74" (18.8mm)
LT444		.04" (1.0mm)	.78" (19.8mm)
General Purpo	ose Conical Tips		$A \xrightarrow{\square}$
LT374		.03" (0.8mm)	.48" (12.2mm)
LT382		.02" (1.5mm)	.62" (15.8mm)
LT429		.02" (0.5mm)	.74" (18.8mm)
General Purpo	ose Angled Conical Tip		B → 3
LT429-1		.02" (0.5mm)	.74" (18.8mm)





# LONER<sub>®</sub> High Temperature Tips

High Temperature	Rated Spade Tips		B →
Part No.	Tip Image	Width A	Length B
LT371LF		.03" (0.8mm)	.55" (14.0mm)
LT375LF		.06" (1.5mm)	.48" (12.2mm)
LT376LF		.12" (3.0mm)	.48" (12.2mm)
LT394LF		.07" (1.8mm)	.93" (23.6mm)
LT395LF		.09" (2.3mm)	.74" (18.8mm)
LT424LF		.06" (1.5mm)	.74" (18.8mm)
LT425LF		.05" (1.3mm)	.93" (23.6mm)
LT431LF		.07" (1.8mm)	.74" (18.8mm)
LT444LF		.04" (1.0mm)	.78" (9.8mm)
High Temperature	Rated Conical Tips		B →
LT374LF		.03" (0.8mm)	.48" (12.2mm)
LT380LF			
		.02" (0.5mm)	.32" (8.1mm)
LT382LF		.02" (0.5mm)	.32" (8.1mm) .62" (15.8mm)
LT382LF		.02" (0.5mm)	.62" (15.8mm)
LT382LF LT383LF		.02" (0.5mm) .02" (0.5mm)	.62" (15.8mm) .72" (18.3mm)
LT382LF LT383LF LT392LF		.02" (0.5mm) .02" (0.5mm) .01" (0.3mm)	.62" (15.8mm) .72" (18.3mm) 1.13" (28.8mm)
LT382LF LT383LF LT392LF LT429LF		.02" (0.5mm) .02" (0.5mm) .01" (0.3mm) .02" (0.5mm)	.62" (15.8mm) .72" (18.3mm) 1.13" (28.8mm) .74" (18.9mm)

www.edsyn.com





High Temperat	ture Rated Angle Face Tips		B → A
Part No.	Tip Image	Width A	Length B
LT298LF		.12" (3.1mm)	.59" (15.0mm)
LT299LF		.16" (4.0mm)	.59" (15.0mm)
LT373LF		.09" (2.3mm)	.59" (15.0mm)
LT387LF		.06" (1.5mm)	.48" (12.2mm)
LT393LF		.06" (1.5mm)	.94" (23.9mm)
LT398LF		.12" (3.0mm)	.59" (15.0mm)
LT399LF		.16" (4.0mm)	.59" (15.0mm)
LT430LF		.06" (1.5mm)	.74" (18.8mm)
LT433LF		.04" (1.2mm)	.69" (17.5mm)
LT443LF		.09" (5.6mm)	.69" (17.5mm)
High Temperat	ture Rated Angled Spade Tips		B → 3
LT444-1LF		.064" (1.0mm)	.78" (9.8mm)
LT392-1LF	ture Rated Angled Conical Tips	.01" (0.3mm)	1.13" (28.8mm)
LT439-1LF		.03" (0.8mm)	.50" (12.7mm)
LT602-1LF		.02" (0.5mm)	.44" (11.2mm)
High Temperat	ture Rated Mini Flow Rework Tips		B → ↓ A →
LT396LF		.13" (3.3mm)	.69" (17.5mm)






## **LONER**<sub>®</sub> Heavy Duty Tip Set-up & Tips



## Hollow Heater Soldering Tools and Stations

Part No.	Description
930	Soldering Station with CL1080 Soldering Tool and IP329 Base
935	Soldering Station with CL1080 Soldering Tool and PS536 Power Supply
951DX-230	Deluxe Soldering Station (includes all 230V models)
951SX	Soldering Station (includes all 230V models)
952DX-230	Dual Deluxe Soldering Station (includes all 230V models)
952SX	Dual Soldering Station (includes all 230V models)
CL1080	Temperature Controlled Soldering Tool
CL1180	Temperature Controlled Soldering Tool
CL1280I	Temperature Controlled Soldering Tool
CL 1580L	Temperature Controlled Soldering Tool

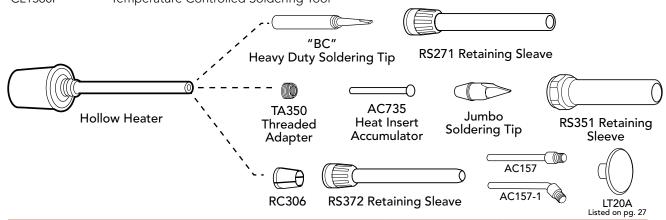

Heavy Duty Spade Tips			B →		
Part No.	Tip Image	Width A	Length B		
HS106BC		.18" (4.6mm)	.45" (11.4mm)		
LT336BC		.07" (1.8mm)	.74" (18.8mm)		
LT337BC		.10" (2.5mm)	.74" (18.8mm)		
LT338BC		.13" (3.3mm)	.74" (18.8mm)		
LT441BC		.21" (5.3mm)	.94" (23.9mm)		
Heavy Duty An	Heavy Duty Angle Face Tips				
LT339BC		.09" (2.3mm)	.77" (19.6mm)		
LT340BC		.12" (3.0mm)	.77" (19.6mm)		
LT341BC		.16" (4.0mm)	.77" (19.6mm)		
<b>Heavy Duty SM</b>	D Knife Tip				
LT570BC		.17" (4.3mm)	.68" (17.3mm)		
Heavy Duty Jumbo Spade & Angle Tips			A T		
LT151B		.06" (1.5mm)	1.13" (28.7mm)		
LT152B		.32" (8.1mm)	.89" (22.6mm)		
LT155B		.33" (8.4mm)	.97" (24.6mm)		

www.edsyn.com








#### Front Loading Hollow Heater Soldering Tools and Stations

Part No.	Description
971	Constant Temperature Soldering Tool (includes all 230V models)
971DX-230	Deluxe High Performance Soldering Station (includes all 230V models)
2020	Microprocessor Controlled Digital Soldering Station (includes all 230V models)

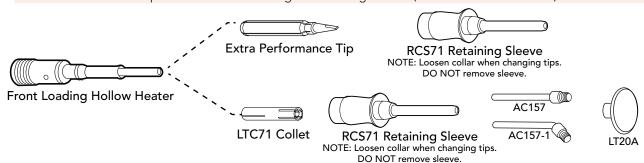

	lated Copper Leather Smoothing		
Part No.	Tip Image	Diameter	Length
LT20A		.79" (20mm)	N/A
Extra Performance	Spade Tips		F B → V
Part No.	Tip Image	Width A	Length B
XP371		.03" (.80mm)	.61" (15.5mm)
XP375		.06" (1.5mm)	.61" (15.5mm)
XP376		.12" (3.0mm)	.61" (21.2mm)
XP395		.09" (2.3mm)	.84" (21.2mm)
XP441		.20" (5.0mm)	.59" (15.0mm)
XP444		.04" (1.0mm)	.87" (22.0mm)
Extra Performance	Conical Tips		
XP374		.04" (.9mm)	.61" (15.5mm)
XP429		.02" (.6mm)	.83" (21.0mm)
Extra Performance	Angle Face Tip		
XP399		.20 (5.0mm)	.45 (11.5mm)

