



TWISTER®

WIRE CONNECTORS



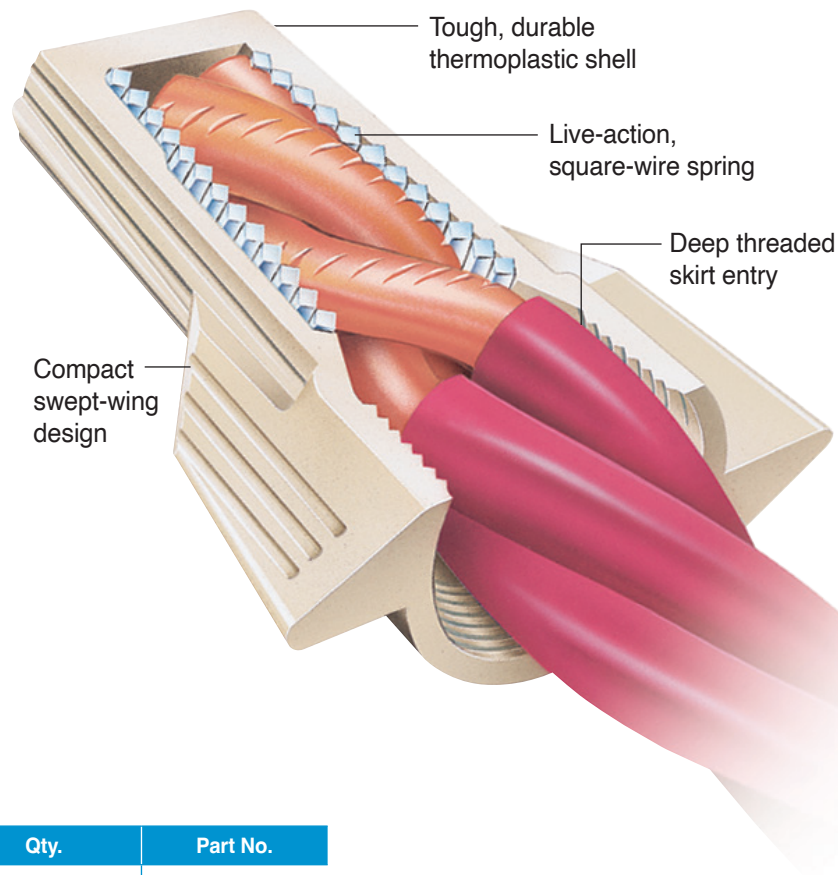
TWISTER®



WIRE CONNECTORS

Preferred Choice for Residential Jobs

Twister® Wire Connectors feature a swept-wing design that fits comfortably in your hand and provides improved leverage and greater torque. The live-action, square-wire spring provides fast, secure connections every time. Two sizes handle 95% of all typical branch-circuit wire combinations – from a minimum of 2 #22 AWG to a maximum of 2 #8. This means fewer connector models to carry at the job site, reduced inventory and lower total cost.

- Exceptional wire-range capacity – two models handle conductors from #22 to #6 AWG
- Swept-wing design provides improved leverage with less effort, especially on larger combinations
- The square-wire spring picks up fast and provides secure connections
- Hex-top allows installation using standard nut driver
- Ribbed shell provides added grip and fast fingertip starts
- Deep skirt protects against flash-over and turned-back strands for maximum dielectric strength
- Tough, UL 94V-2 flame-retardant shell.
Rated at 105°C (221°F)



Model No.	Wire Range (in.)	Wire Range (mm)	Qty.	Part No.
 341® Tan	600V* 22 to 8 AWG Min. 3 #22 Max. 3 #10	600V* ,34mm to 10,00mm ² dia. Min. 3-,34mm ² Max. 3-6,0mm ²	Box of 100	30-341
			Jar of 400	30-441J
			Bag of 500	30-641
			Jar of 750	30-341J
			Barrel of 25,000	30-841
 342® Gray	600V* 18 to 6 AWG Min. 3 #14 Max. 2 #8 w/2 #12	600V* ,75mm ² to 10,0mm ² dia. Min. 3-2,5mm ² Max. 2-10,00mm ² w/2-4,0mm ²	Box of 50	30-342
			Bag of 250	30-642
			Barrel of 15,000	30-842

*1,000 Volts maximum in fixtures and signs.



IDEAL INDUSTRIES, INC.
1375 Park Avenue, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA
For complete sales office contact information, visit us at: idealind.com

Form No. P-2257
©2025 IDEAL INDUSTRIES, INC.
PRINTED IN USA
4/25