



TWISTER® WIRE CONNECTORS

MODELS 341® & 342®

FEATURES/BENEFITS:



- Swept wings for more comfort, extra leverage and less effort on large combinations
- Expanding, live-action spring supports a wide range of common wire configurations
- Copolymer shell expands for smooth, progressive tightening ensuring dependable connections
- Hexagonal shape accommodates standard nut driver for easy installation, quick to take-up on even the toughest combinations, including solid-to-stranded

ELECTRICAL:

VOLTAGE: 600V Max.
*1000V Max. in Fixtures and Signs

PHYSICAL:

HOUSING: Polypropylene
Insert: Steel
Plating: Zinc
Temperature: 105°C (221°F)

STANDARDS & SPECIFICATIONS:

UL 486C
UL 94V-2 Flame Rating
CSA: C22.2 No. 188
IEC 988-2 and 998-2-4
Federal Specifications: W-S-610E




WIRE RANGE & COMBINATIONS:

- Solid and/or stranded wire combinations unless stated otherwise
- Consult website for other combinations not listed

Model 341°	Model 342°	
Strip Length: 1/2" (12.5mm)	Strip Length: 5/8" (16mm)	
3 to 6 #22 2 to 6 #20 2 to 6 #18 1 to 6 #16 1 to 5 #14 1 to 3 #12 1 to 3 #10	3 to 6 #14 4 #12 w/1 #10 2 to 6 #12 2 to 4 #10 1 to 2 #8	

DIMENSIONS:

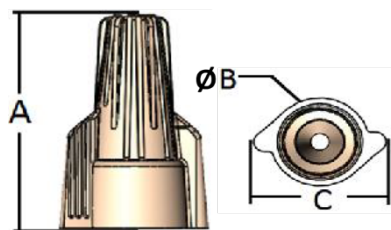

MODEL	A		B		C	
	Inches	mm	Inches	mm	Inches	mm
341	1.14	29.0	0.54	13.7	0.72	18.3
342	1.31	33.3	0.66	16.8	1.00	25.4

ORDERING INFO:

Model 341® (Tan)			Model 342® (Gray)		
QUANTITY	CAT. NO.	WEIGHT (lbs.)	QUANTITY	CAT. NO.	WEIGHT (lbs.)
Box of 100	30-341	0.52	Box of 50	30-342	0.56
Jar of 400	30-441J	2.08	Bag of 250	30-642	2.40
Bag of 500	30-641	2.00	Barrel of 15,000	30-842	139.50
Jar of 500	30-641J	2.65			
Jar of 750	30-341J	3.53			
Carton of 1,000	30-541	5.30			
Barrel of 25,000	30-841	120.00			

FACTORY CONTACT:

IDEAL INDUSTRIES, INC.
1375 Park Avenue; Sycamore, IL 60178
Ph: (800) 324-9571
Fax: (888) 222-6140
E: oem@idealindustries.com

NOTES: