




IN-SURE[®] PUSH-IN WIRE CONNECTORS

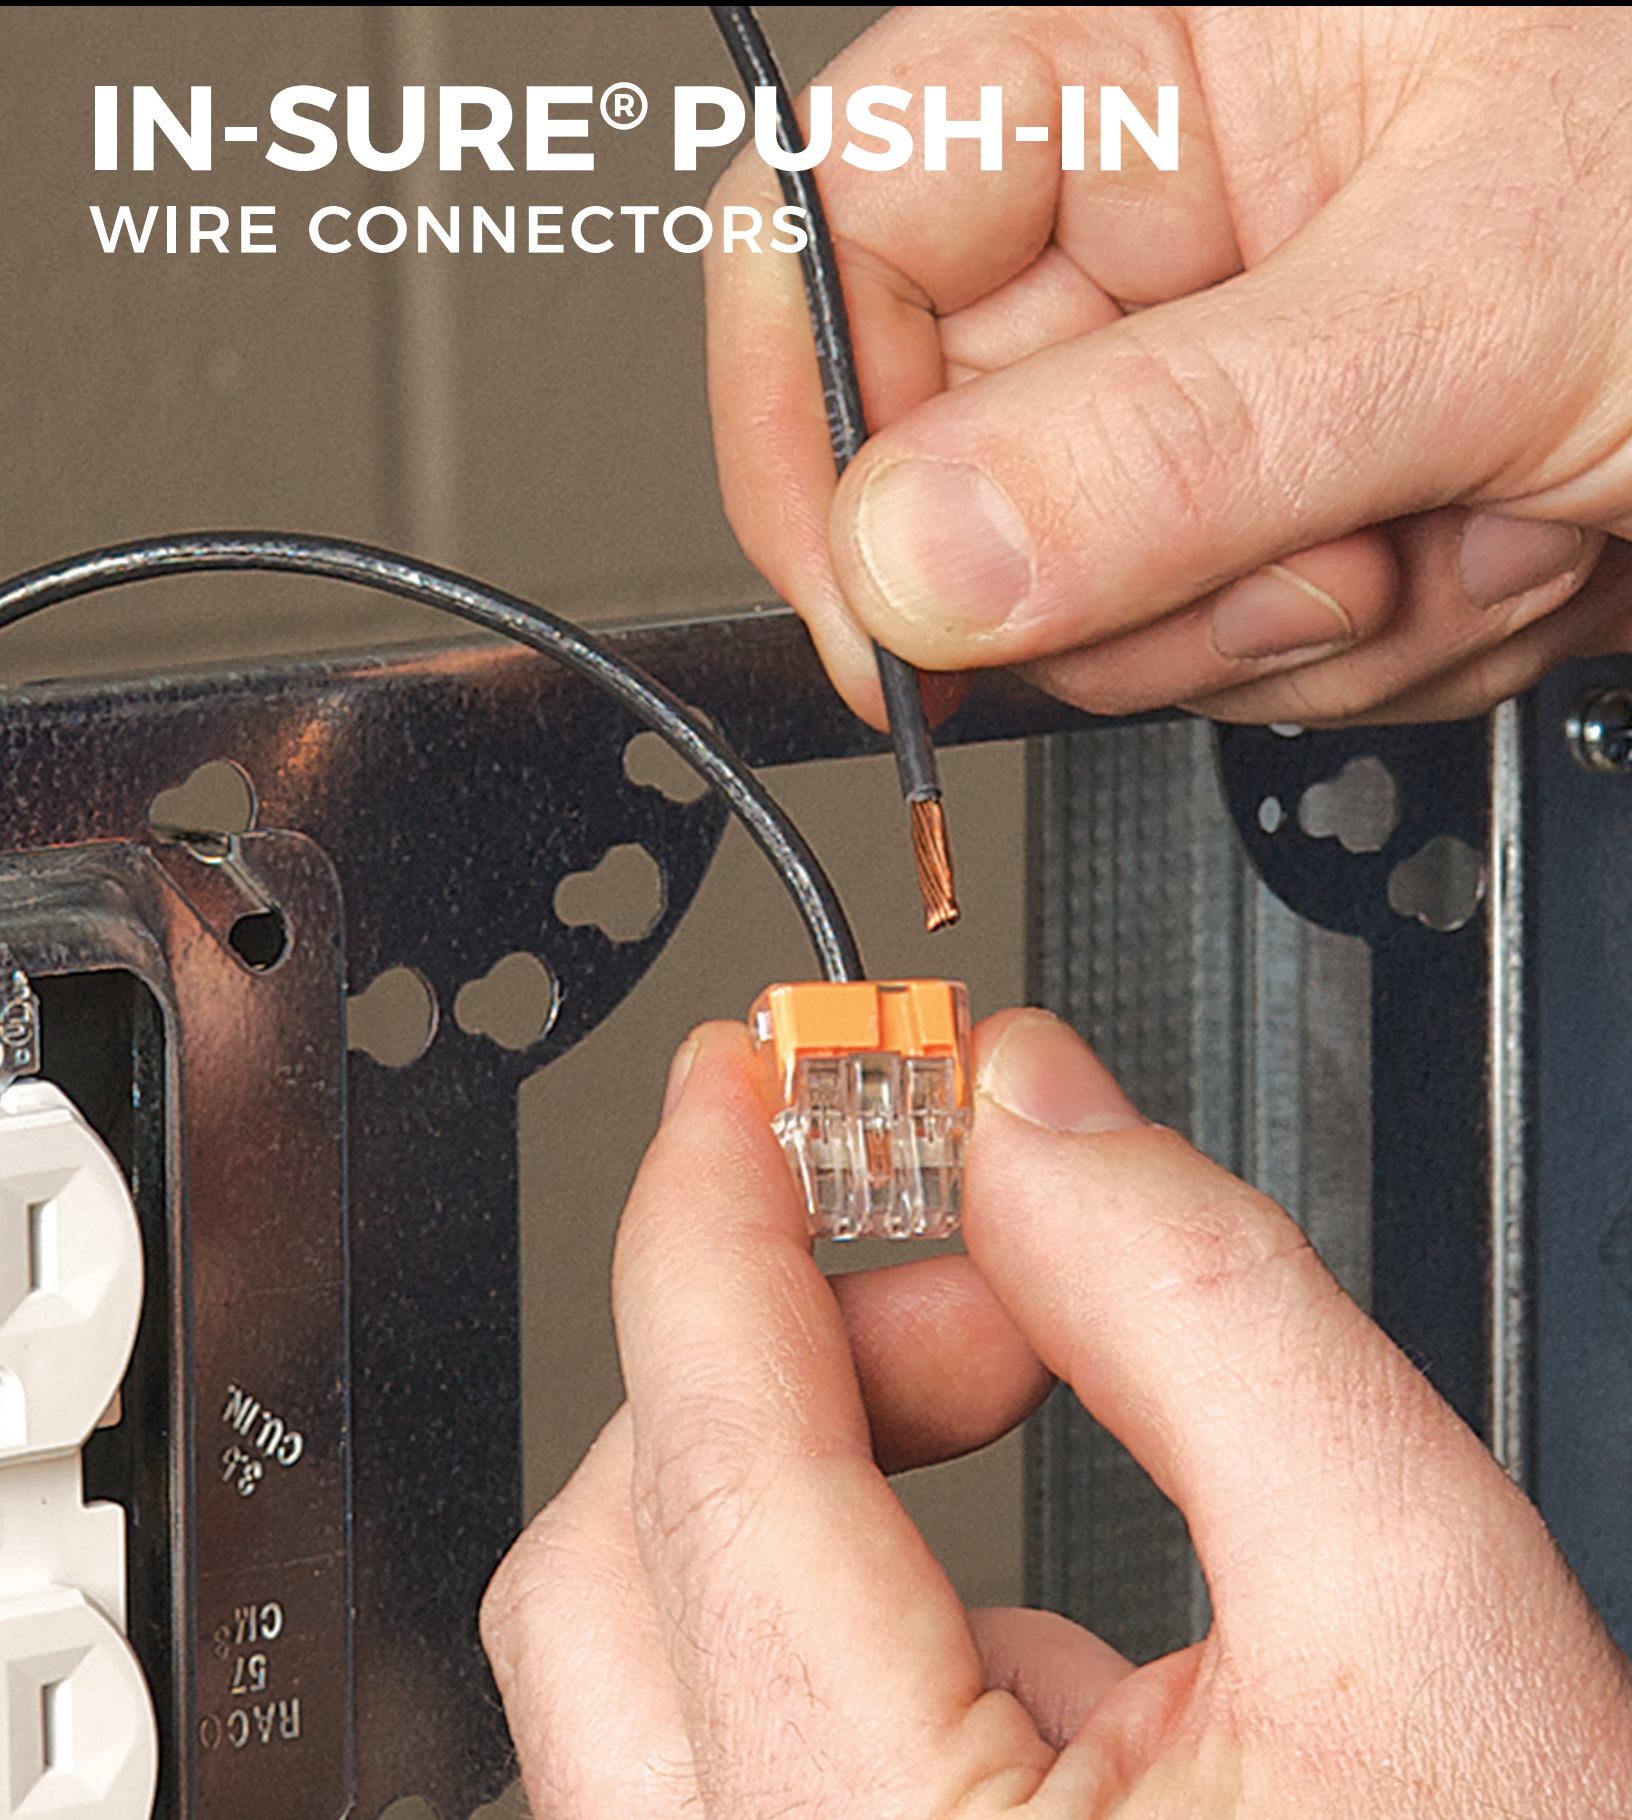


IN-SURE® PUSH-IN WIRE CONNECTORS

Save Time And Increase Productivity

If it's IDEAL®, it's a quality connector — and the In-Sure® Push-In Wire Connector is no exception. Color-coded, the clear polycarbonate housing allows for visual verification of every connection. The ergonomic design of the In-Sure® is easier to grip which means more comfortable push-in connections. Perfect for lighting installations, pre-fabricated wiring systems, and other branch circuit wiring applications. Simply push the wire in — the low insertion force makes it easy. UL Listed, CSA Certified and rated to 600V and 105°C.

In-Sure® Push-In Wire Connectors save time and improves productivity while perfecting connections.

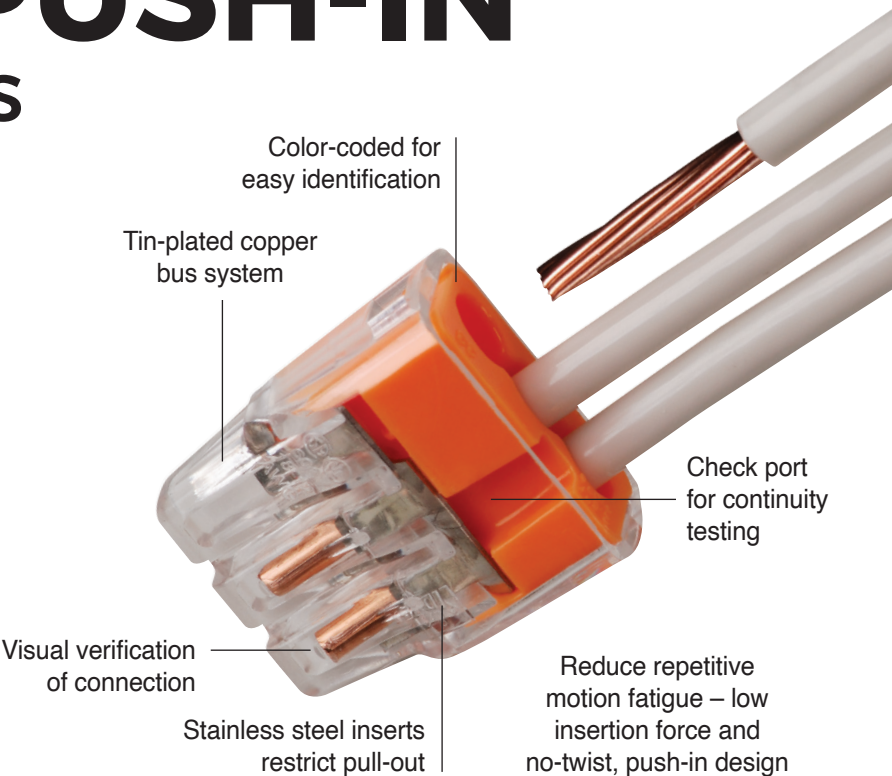

MODEL	COLOR	PORTS	AMP RATING	WIRE RANGE	QUANTITY	PART NO.
32	Red	2	20 Amp	Solid Copper: 12 – 20 AWG Stranded Copper: 12 – 16 AWG (≤ 19 Stranded) 18 AWG (7 Stranded) Stranded Copper (Tin Bonded): 14 – 18 AWG (≤ 19 Stranded)	Box of 100	30-1032
33	Orange	3	20 Amp		Jar of 300	30-1032J
					Box of 5,000	30-1632
34	Yellow	4	20 Amp	DO NOT use with 16 AWG (26 Strands)	Box of 100	30-1033
					Jar of 250	30-1033J
					Box of 5,000	30-1633
87	Gray	5	20 Amp	Solid Copper: 12 – 20 AWG Stranded Copper: 12 – 16 AWG (≤ 19 Stranded) 18 AWG (≤ 7 Stranded) Stranded Copper (Tin Bonded): 14 – 18 AWG (≤ 19 Stranded)	Box of 100	30-1034
88	Blue	6	20 Amp		Jar of 200	30-1034J
					Box of 5,000	30-1634
90	Black	8	20 Amp	DO NOT use with 16 AWG (26 Strands)	Jar of 200	30-1087J
					Box of 3,000	30-1687
39	Blue	3	30 Amp	Solid Copper: 10 – 14 AWG (6.0-2.5mm2 Rigid) Solid Copper-Clad Aluminum*: 10 – 12 AWG Stranded Copper: 10 – 12 AWG (≤ 19 Stranded) (Tin Bonded): 10 – 14 AWG (≤ 19 Stranded)	Jar of 200	30-1088J
					Box of 2,500	30-1688
					Jar of 150	30-1090J
					Box of 2,000	30-1690
					Box of 50	30-1039
					Jar of 150	30-1039J

Cu to Cu ONLY. Do not use on aluminum. Temperature rating: 105°C (221°F) maximum; 600V maximum building wire, 1000V maximum signs or lighting fixtures
Model 39 only: *Listed for use with CU or CC. Do not use on Aluminum.
UL Listed for US and Canada. EU and UKCA certified. RoHS compliant.



IDEAL INDUSTRIES, INC.
1375 Park Avenue, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA
For complete sales office contact information, visit us at: idealind.com

Form No. P-2854
©2025 IDEAL INDUSTRIES, INC.
PRINTED IN USA
4/25