


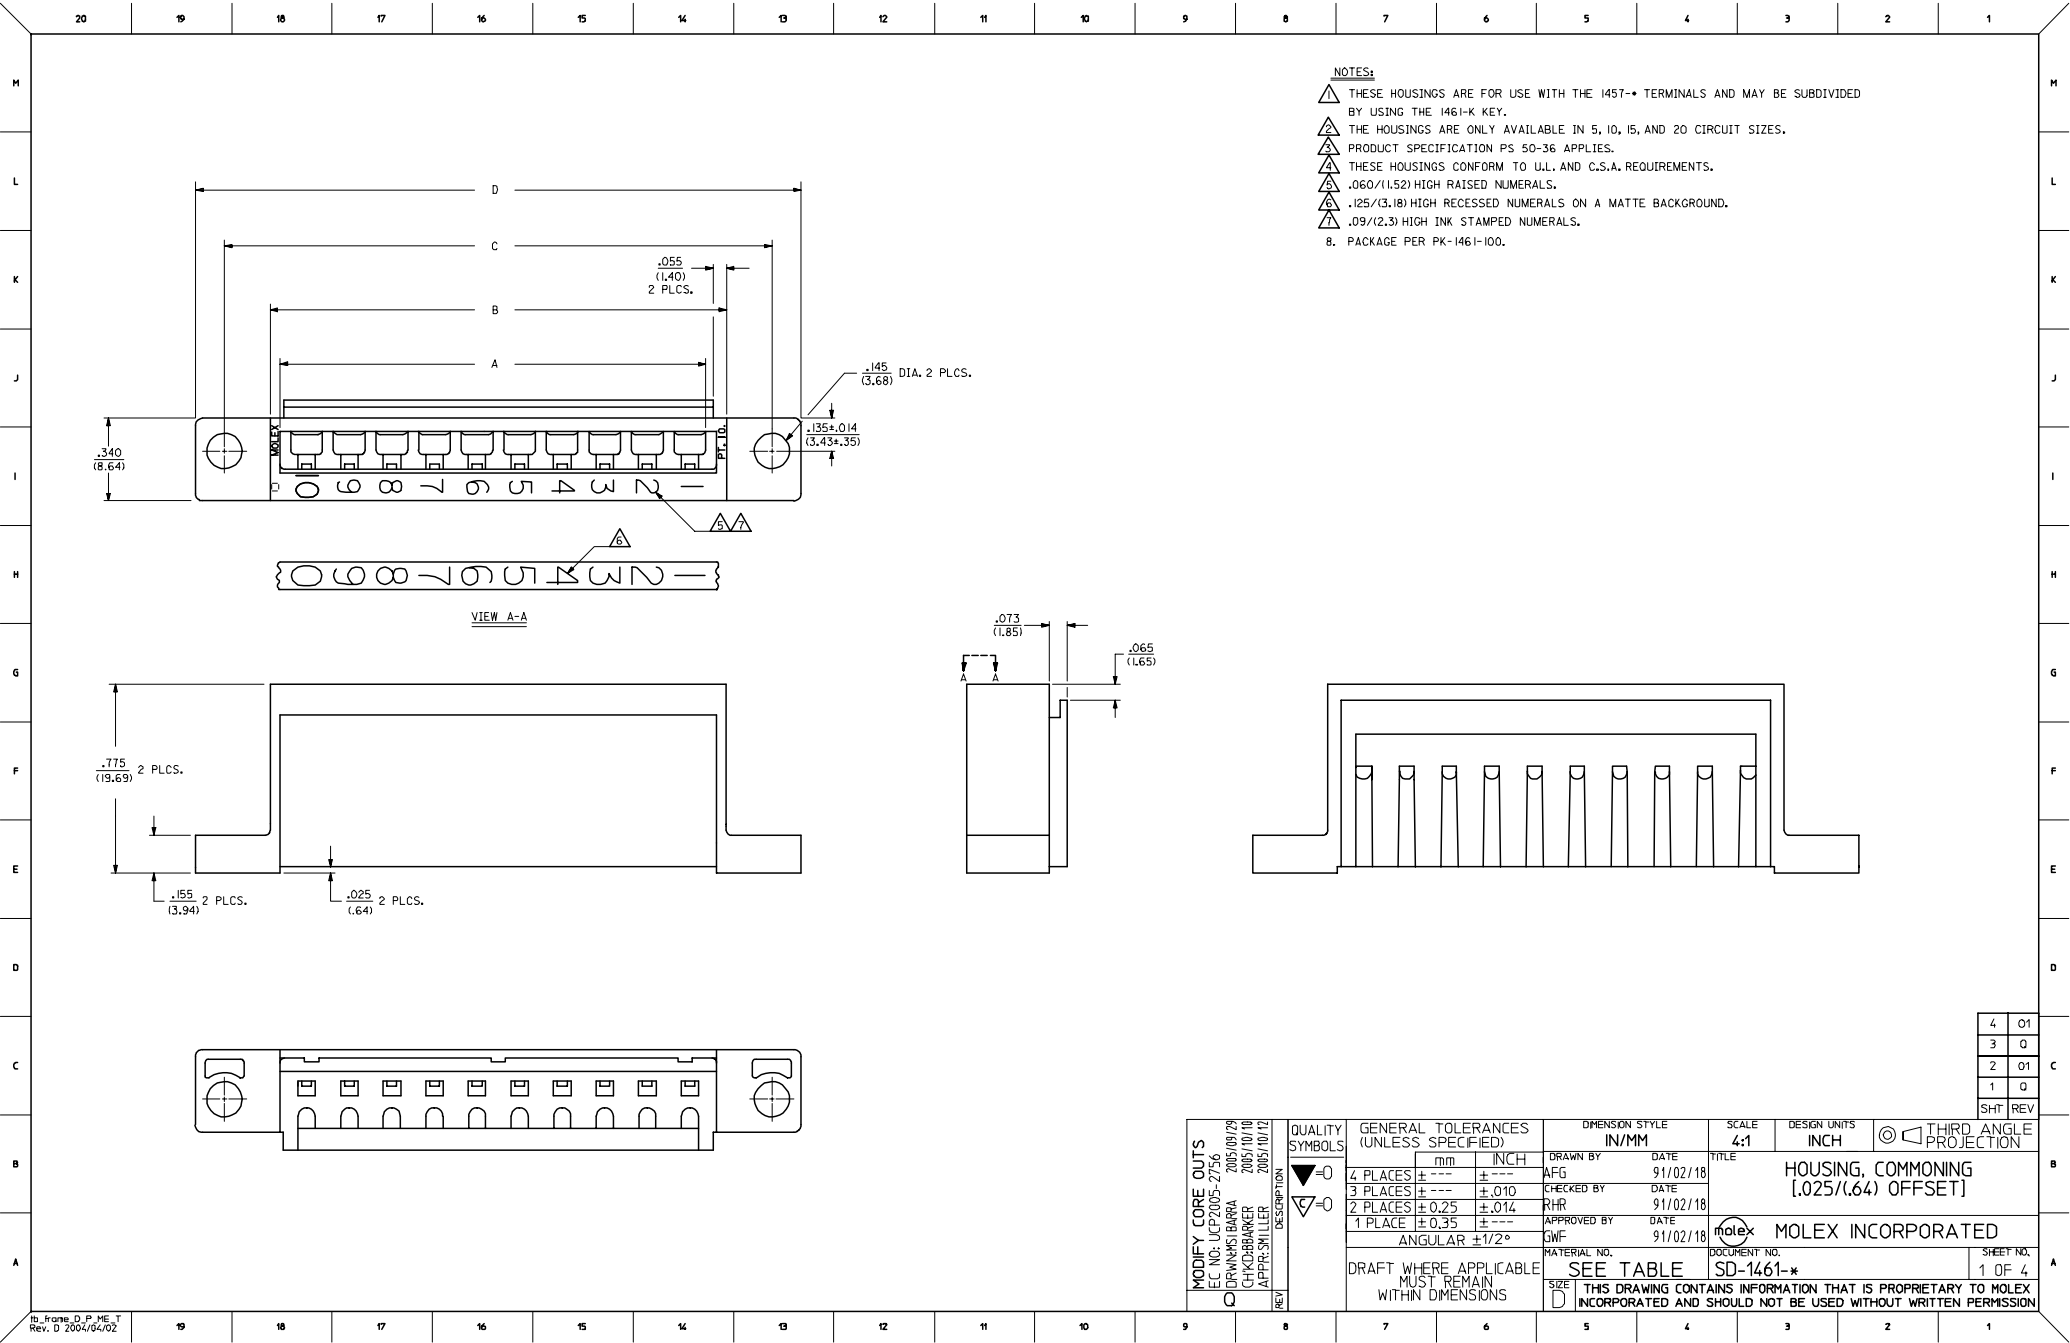

- NOTES:
- △ THESE HOUSINGS ARE FOR USE WITH THE 1457-• TERMINALS AND MAY BE SUBDIVIDED BY USING THE 1461-K KEY.
 - △ THE HOUSINGS ARE ONLY AVAILABLE IN 5, 10, 15, AND 20 CIRCUIT SIZES.
 - △ PRODUCT SPECIFICATION PS 50-36 APPLIES.
 - △ THESE HOUSINGS CONFORM TO U.L. AND C.S.A. REQUIREMENTS.
 - △ .060/(1.52) HIGH RAISED NUMERALS.
 - △ .125/(3.18) HIGH RECESSED NUMERALS ON A MATTE BACKGROUND.
 - △ .09/(2.3) HIGH INK STAMPED NUMERALS.
 - 8. PACKAGE PER PK-1461-100.

4	01
3	Q
2	01
1	Q

MODIFY CORE OUTS EC NO: UCP2005-2756 Q DRWNS BARRA 2005/09/29 CHKD BARKER 2005/10/18 APPR: SKILLER 2005/10/12	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .014 1 PLACE ± 0.35 ± --- ANGULAR ± 1/2°	DIMENSION STYLE IN/MM DRAWN BY DATE AFG 9/1/02/18 CHECKED BY DATE RHR 9/1/02/18 APPROVED BY DATE GWF 9/1/02/18	SCALE 4:1 DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE HOUSING, COMMONING [.025/(.64) OFFSET]	DOCUMENT NO. SD-1461-*	SHEET NO. 1 OF 4

[illegible]