

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


Part Number: [0010085091](#)
Status: **Active**
Overview: [KK Interconnect Systems](#)
Description: KK Header, Vertical, with Polarizing Backwall, 9 Circuits, Tin (Sn) Plating

Documents:
[3D Model](#) [Packaging Specification PK-2599-0001-000 \(PDF\)](#)
[Drawing \(PDF\)](#) [Symbol Footprint Data SYM-1008-5091-001 \(PDF\)](#)
[3D Model \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-99020-0087-001 \(PDF\)](#)

Agency Certification
UL E29179

General
Product Family PCB Headers
Series [2599](#)
Application Power, Wire-to-Board
Overview [KK Interconnect Systems](#)
Product Name KK 508
Taxonomy PCB Headers and Receptacles
UPC 800753744608

Physical
Breakaway No
Circuits (Loaded) 9
Circuits (maximum) 9
Color - Resin Natural
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-2
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 2.434/g
Number of Rows 1
Orientation Vertical
PC Tail Length 4.45mm
PCB Retention None
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 5.08mm
Pitch - Termination Interface 5.08mm
Plating min - Mating 5.080µm
Plating min - Termination 5.080µm
Polarized to PCB No
Shrouded Partial
Stackable Yes
Surface Mount Compatible (SMC) No
Temperature Range - Operating See Product Specification
Termination Interface: Style Through Hole

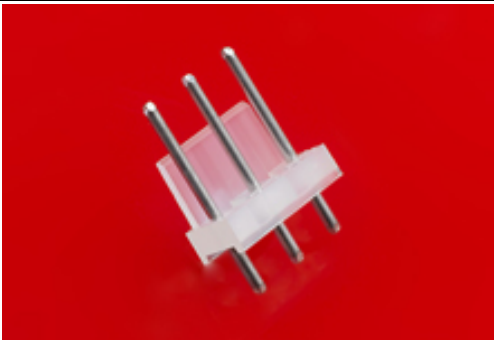

Series image - Reference only

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant
REACH SVHC
Not Contained Per -
D(2022)4187-DC (10
June 2022)
Halogen-Free
Status
Low-Halogen
For more information, please visit [Contact US](#)

China ROHS Green Image
ELV Not Relevant
RoHS Phthalates Not Contained

Search Parts in this Series
[2599 Series](#)

Mates With
Crimp Housing [3001](#)
 PCB Receptacle
[3002](#)

Electrical

Current - Maximum per Contact	7.0A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	2599M09A
--------------------	----------

Reference - Drawing Numbers

Packaging Specification	PK-2599-0001-000
Product Specification	PS-99020-0087-001
Symbol/Footprint Data	SYM-1008-5091-001

This document was generated on 10/10/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION