

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0151350801

Status:


Active

Overview:

CLIK-Mate Wire-to-Board Connectors

Description:

CLIK-Mate-to-CLIK-Mate Off-the-Shelf (OTS) Cable Assembly, Single Row, 100.00mm Length, 8 Circuits, Beige

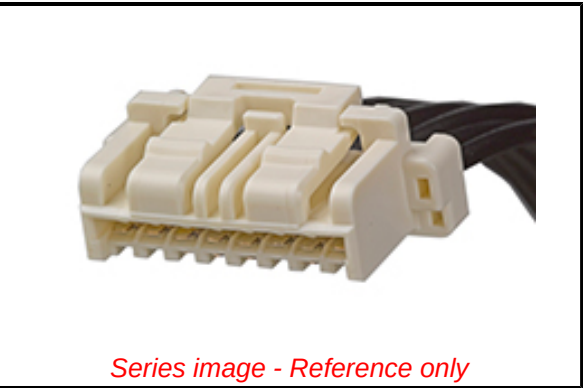

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Datasheet \(PDF\)](#)

|                                |                                    |
|--------------------------------|------------------------------------|
| General                        |                                    |
| Product Family                 | Cable Assemblies                   |
| Series                         | 15135                              |
| Application                    | Signal, Wire-to-Board              |
| Assembly Configuration         | Dual Ended Connectors              |
| Connector to Connector         | CLIK-Mate-to-CLIK-Mate             |
| Overmolded                     | No                                 |
| Overview                       | CLIK-Mate Wire-to-Board Connectors |
| Product Name                   | CLIK-Mate                          |
| Taxonomy                       | Power and Signal Cable Assembl     |
| Type                           | Discrete Wire Assembly             |
| UPC                            | 191128160438                       |
| Physical                       |                                    |
| Cable Length                   | 100.00mm                           |
| Circuits (Loaded)              | 8                                  |
| Color - Resin                  | Beige                              |
| Gender                         | Male-Male                          |
| Lock to Mating Part            | Yes                                |
| Material - Metal               | Copper Alloy                       |
| Material - Plating Mating      | Tin                                |
| Material - Plating Termination | Tin                                |
| Material - Resin               | PBT                                |
| Net Weight                     | 3.802/g                            |
| Number of Rows                 | 1                                  |
| Packaging Type                 | Bag                                |
| Pitch - Mating Interface       | 1.50mm                             |
| Plating min - Mating           | 0.406µm                            |
| Plating min - Termination      | 0.406µm                            |
| Single Ended                   | No                                 |
| Termination Interface: Style   | Crimp or Compression               |
| Wire Insulation Diameter       | 1.10mm                             |
| Wire Size AWG                  | 24                                 |
| Wire/Cable Type                | UL 1061                            |
| Electrical                     |                                    |
| Current - Maximum per Contact  | 2.0A                               |
| Voltage - Maximum              | 100V AC (RMS)/DC                   |
| Material Info                  |                                    |
| Reference - Drawing Numbers    |                                    |
| Sales Drawing                  | 2012341679-000                     |

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

Green Image

REACH SVHC

Not Contained Per - D(2022)4187-DC (10 June 2022)

Halogen-Free

Not Low-Halogen

Status

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

15135 Series

Mates With

Bottom-Entry Receptacle [503395](#) . Right Angle, Through Hole Receptacle [503175](#) . Right Angle, Surface Mount Receptacle [502585](#) . Vertical, Through Hole Receptacle [503159](#) . Vertical, Surface Mount Receptacle [502584](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION