
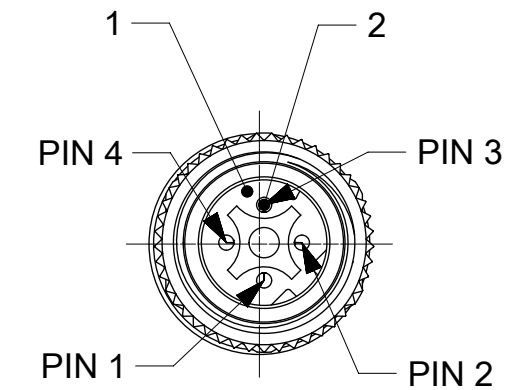


OPTIONS

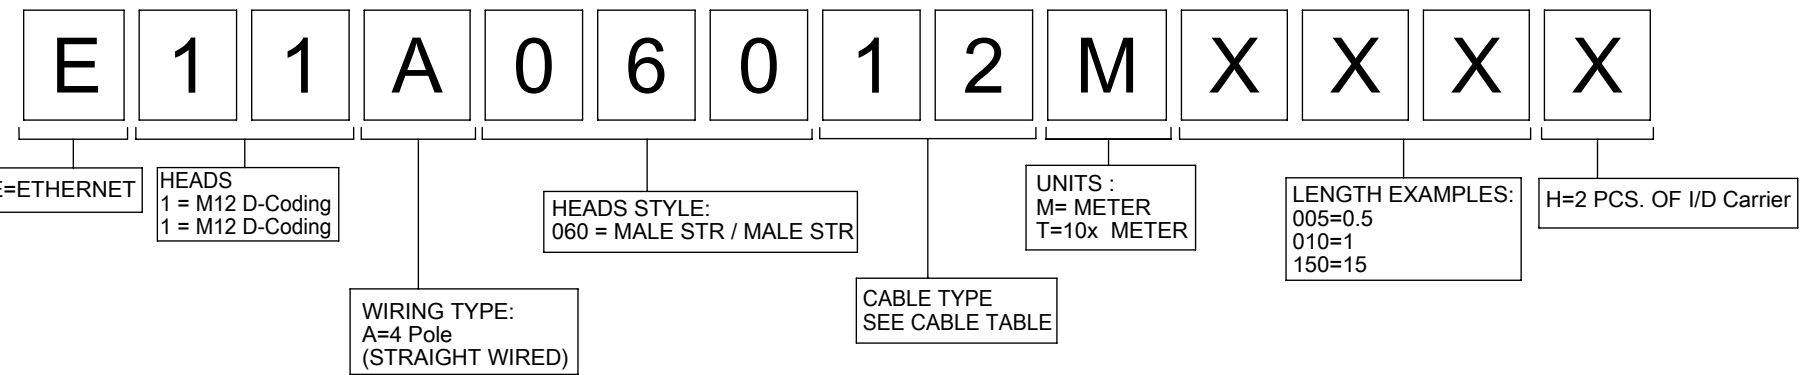

VIEW FROM THE FRONT SIDE
SCALE 2:1

CABLE TYPE	WIRE GAUGE	CABLE JACKET	UL	CSA	STATIC	FLEXING	DRAG CHAIN TESTED	OTHER
CAB-12 4P(12)	0.34mm ²	TPU GREEN	STYLE 21215	YES	-40°C TO +80°C >5xO.D.	-20°C TO +60°C >15xO.D.	2 mio CYCLES	WELD SLAG RESISTANCE

BOM (ID CARRIER APPLICABLE, IF ENGINEERING NO. HAS "H" {SEE PART LIST})

LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		CURRENT REV DESC: ADDED NEW PNS			molex CSE M12 ETH 4P DC MA STR WSOR XM DE						
	mm		1:1											
	GENERAL TOLERANCES (UNLESS SPECIFIED)													
	ANGULAR TOL ± 1.0 °													
	4 PLACES		±											
	3 PLACES		±		EC NO: 677462 DRWN: SSM 2021/07/28 CHK'D: RSILLER 2021/09/13 APPR: RSILLER 2021/09/13			PRODUCT CUSTOMER DRAWING						
	2 PLACES		± 0.05											
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: BBRAUCH 2014/10/16 APPR: CBUERGER 2014/10/16			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
	0 PLACES		± 0.5					SD-120108-072		PSD	001	A4		
DIVISIONAL SYMBOLS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
				A3-SIZE		120108		SEE SHEET 2		GENERAL MARKET		1 OF 2		

