

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015249067](#)

Status: **Active**

Overview: Mini-Fit Family Power Connectors

Description: Mini-Fit BMI Header, Dual Row, Right-Angle, with Snap-in Plastic Peg PCB Lock, 6 Circuits, PA Polyamide Nylon 6/6, UL 94V-2, with Select Gold (Au) Plating

Documents:

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[3D Model](#)

[Product Specification 55560002-PS-CH-000 \(PDF\)](#)

[Product Specification 55560002-PS-ES-000 \(PDF\)](#)

[Product Specification 55560002-PS-SK-000 \(PDF\)](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification PS-5556-002-001 \(PDF\)](#)

[Application Specification 424040001-AS-000 \(PDF\)](#)

[Packaging Specification PK-42404-002-001 \(PDF\)](#)

[Test Summary TS-42404-001-001 \(PDF\)](#)

[Test Summary TS-5556-002-001 \(PDF\)](#)

[Symbol Footprint Data SYM-A42404-06XX-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980

UL E29179

General

Product Family

Series PCB Headers

Application 42404

Comments Board-to-Board, Power, Wire-to-Board
Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire. See Molex product specification PS-45750-001 for additional current de-rating information.

Overview [Mini-Fit Family Power Connectors](#)

Product Name Mini-Fit BMI

Taxonomy PCB Headers and Receptacles

UPC 822350286411

Physical

Breakaway No

Circuits (Loaded) 6

Circuits (maximum) 6

Color - Resin Natural

Durability (mating cycles max) 30

Flammability 94V-2

Glow-Wire Capable No

Guide to Mating Part Yes

Lock to Mating Part Yes

Material - Metal Brass

Material - Plating Mating Gold

Material - Plating Termination Tin

Material - Resin Nylon

Net Weight 2.970/g

Number of Rows 2

Orientation Right Angle

PC Tail Length 3.30mm

PCB Locator Yes


PCB Retention Yes

PCB Thickness - Recommended 1.80mm

Packaging Type Tray

Pitch - Mating Interface 4.20mm

Plating min - Mating 0.762µm

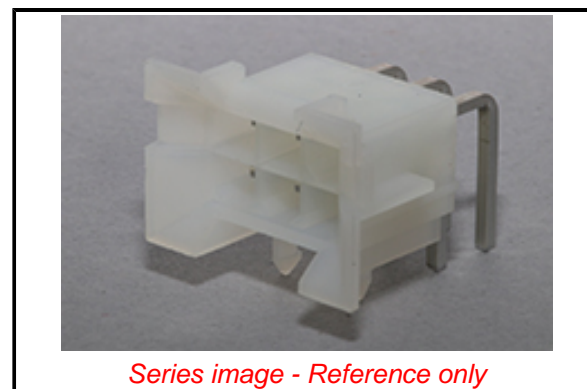

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42404 Series](#)

Mates With

[15060060](#) Mini-Fit BMI Panel Mount

Receptacle, [39012060](#) Mini-Fit Jr.

Receptacle, [15247062](#) Mini-Fit BMI Vertical
Receptacle Header

Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Partial
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240

Material Info

Engineering Number	42404-06A5
--------------------	------------

Reference - Drawing Numbers

Application Specification	424040001-AS-000
Packaging Specification	PK-42404-002-001
Product Specification	55560002-PS-CH-000, 55560002-PS-ES-000, 55560002-PS-SK-000, PS-45750-001-001, PS-5556-002-001
Sales Drawing	SDA-42404-XXXX-001
Symbol/Footprint Data	SYM-A42404-06XX-001
Test Summary	TS-42404-001-001, TS-5556-002-001

This document was generated on 10/07/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION