

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1726722003](#)  
**Status:** **Active**  
**Overview:** [Super Sabre Connector System](#)  
**Description:** 7.50mm Pitch Super Sabre Receptacle Crimp Housing, UL 94V-0, 3 Circuits

**Documents:**

|   |  |
|---|--|
| <a href="#">3D Model</a>                                      | <a href="#">Packaging Specification PK-44441-001-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Test Summary TS-171825-001-001 (PDF)</a>           |
| <a href="#">Product Specification PS-171825-001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |  |
|----------------|--|
| Product Family | Crimp Housings                               |
| Series         | <a href="#">172672</a>                       |
| Application    | Power, Wire-to-Board, Wire-to-Wire           |
| Overview       | <a href="#">Super Sabre Connector System</a> |
| Product Name   | Super Sabre                                  |
| UPC            | 889056025706                                 |

**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (maximum)            | 3              |
| Color - Resin                 | Black          |
| Flammability                  | 94V-0          |
| Gender                        | Receptacle     |
| Glow-Wire Capable             | No             |
| Keying to Mating Part         | Yes            |
| Lock to Mating Part           | Yes            |
| Material - Resin              | Nylon          |
| Net Weight                    | 2.725/g        |
| Number of Rows                | 1              |
| Packaging Type                | Carton         |
| Panel Mount                   | No             |
| Pitch - Mating Interface      | 7.50mm         |
| Polarized to Mating Part      | Yes            |
| Stackable                     | No             |
| Temperature Range - Operating | -40° to +125°C |

**Electrical**

|                               |       |
|-------------------------------|-------|
| Current - Maximum per Contact | 34.0A |
|-------------------------------|-------|


**Solder Process Data**

|                              |     |
|------------------------------|-----|
| Lead-free Process Capability | N/A |
|------------------------------|-----|

**Material Info**

**Reference - Drawing Numbers**

|                         |                   |
|-------------------------|-------------------|
| Packaging Specification | PK-44441-001-001  |
| Product Specification   | PS-171825-001-001 |
| Sales Drawing           | 1726720000-SD-000 |
| Test Summary            | TS-171825-001-001 |

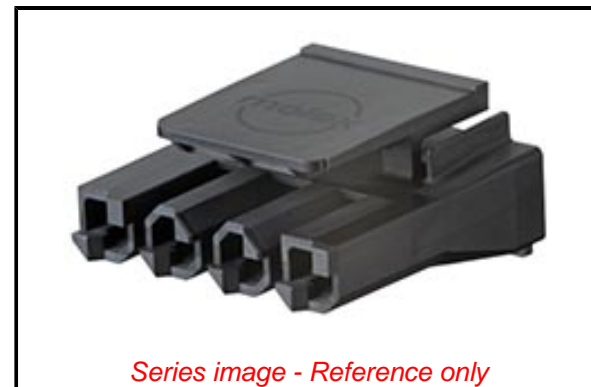

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/71/2019 (16 July  
2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[172672](#) Series

**Mates With**

[172042](#) Super Sabre Vertical Header,  
[172043](#) Super Sabre Right Angle Header,  
[172673](#) Super Sabre Plug Crimp Housing

**Use With**

[171825](#) Super Sabre Female Crimp  
Terminal