

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [2141150011](#)
Status: **Active**
Overview: [EXTreme Guardian System](#)
Description: EXTreme Guardian Right-Angle Receptacle Assembly with Guide Receivers, 1 Power Circuit, 15 Signal Circuits, 1 Power Circuit

Documents:

3D Model	Packaging Specification 2141150010-PK-000 (PDF)
Drawing (PDF)	Datasheet (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification 2141130000-PS-000 (PDF)	

Agency Certification

UL E29179

Application tooling part link

Application Tooling Part Link 200199-1800


General

Product Family	PCB Receptacles
Series	214115
Application	Board-to-Board, Power, Signal
Overview	EXTreme Guardian System
Product Name	EXTreme Guardian
UPC	193264618729

Physical

(p)ower-(s)ignal Configuration	1p - 15s - 1p
Circuits (Loaded)	17
Circuits (maximum)	17
Color - Resin	Black
Durability (mating cycles max)	200
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	No
Material - Metal	High Conductivity Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	14.690/g
Number of Rows	1, 5
Orientation	Right Angle
PC Tail Length	2.50mm, 3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

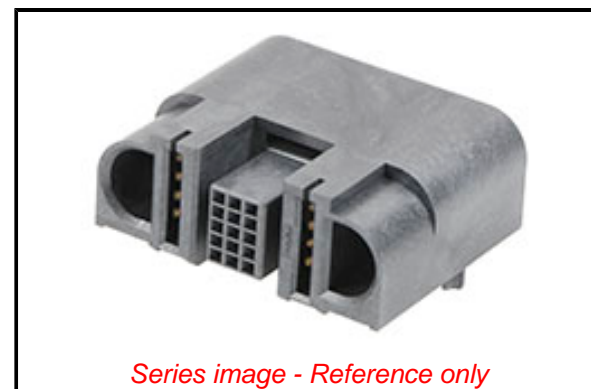

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[214115 Series](#)

Mates With

[EXTreme Guardian Right-Angle Plug
2141130011](#)

Current - Maximum per Contact	80.0A
Voltage - Maximum	125V

Material Info

Reference - Drawing Numbers

Packaging Specification	2141150010-PK-000
Product Specification	2141130000-PS-000
Sales Drawing	2141150011-SD-000

This document was generated on 05/17/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION