

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0022032021

Status:


Active

Overview:

KK Interconnect Solutions

Description:

KK 254 Wire-to-Board Header, Single Row, Vertical, 2 Circuits, PA Polyamide Nylon, Tin (Sn) Plating

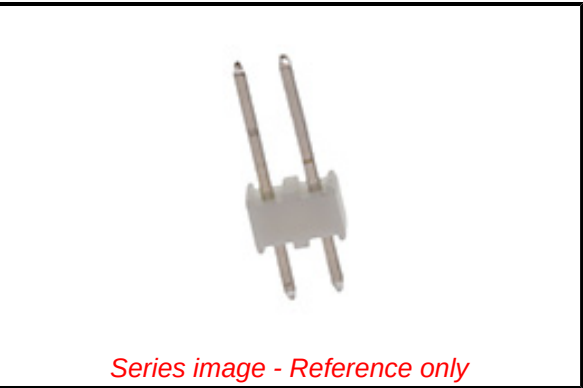

Documents:	
3D Model (PDF)	Product Specification PS-10-07-001 (PDF)
3D Model	Packaging Specification PK-4030-001-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	4030
Application	Board-to-Board, Signal, Wire-to-Board
Overview	KK Interconnect Solutions
Product Name	KK 254
Taxonomy	PCB Headers and Receptacles
UPC	800753591837
Physical	
Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Natural (White)
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	0.139/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.43mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	5.080µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole
Electrical	

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

4030 Series

Mates With

KK 254 Crimp Housing [2695](#) , [7880](#) . KK 254 Top-Entry PCB Receptacle [4455](#) . C-Grid Shunt Terminal Housing [7859](#)

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Engineering Number	A-4030-02A197
Reference - Drawing Numbers	
Packaging Specification	PK-4030-001-001
Product Specification	PS-10-07-001
Sales Drawing	SD-4030-0001-001

This document was generated on 08/31/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION