


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0787261004**
Status: **Active**
Overview: DDR4 DIMM Sockets
Description: DDR4 DIMM Socket, Vertical Through-Hole, 0.76µm Gold Plating, 288 Circuits, PCB Thickness 1.57mm, Tail Length 2.67mm, Black Housing, White Latch

Documents:

3D Model (PDF)	Application Specification AS-78726-002-001 (PDF)
3D Model	Packaging Specification PK-78726-001-000 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-78726-001-001 (PDF)	

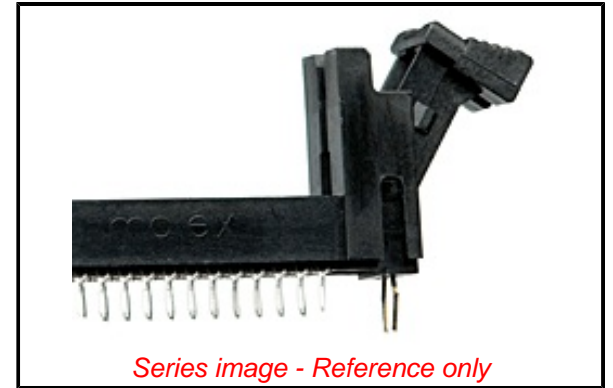

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Memory Module Sockets
Series	<u>78726</u>
Component Type	Socket
JEDEC Outline	MO-309
Overview	<u>DDR4 DIMM Sockets</u>
Product Name	DDR4 DIMM
Taxonomy	Memory Module Connectors
UPC	887191398853

Physical

Circuits (Loaded)	288
Circuits (maximum)	288
Durability (mating cycles max)	25
Entry Angle	Vertical (Top Entry)
Flammability	94V-0
Housing Color	Black
Keying to Mating Part	None
Latch Color	White
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	6.626/g
PC Tail Length	2.67mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	0.85mm
Pitch - Termination Interface	0.85mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Temperature Range - Operating	-55° to +85°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	0.75A
Voltage - Maximum	29V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
--	-----

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

78726 Series

Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-78726-002-001
Electrical Model Document	787260005-000, EE-78726-002-001, EE-78726-004-001
Packaging Specification	PK-78726-001-000
Product Specification	PS-78726-001-001
S-Parameter Model	787260005-000, SP-78726-002-001, SP-78726-004-001
Sales Drawing	SD-78726-002-000

This document was generated on 08/26/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION