


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1719820142](#)
Status: **Active**
Overview: Nano-Pitch I/O™ Interconnect System
Description: Nano-Pitch I/O™ Receptacle, Right Angle, Surface Mount, without Cap, 42 Circuits

Documents:

3D Model	Application Specification AS-173162-0001 (PDF)
Drawing (PDF)	Application Specification AS-173162-0002 (PDF)
Product Specification PS-173162-0001-001 (PDF)	Packaging Specification PK-171982-9000 (PDF)
Product Specification TS-171982-0001-001 (PDF)	Packaging Specification PK-173307-0001 (PDF)
Product Specification TS-171982-0010-001 (PDF)	RoHS Certificate of Compliance (PDF)

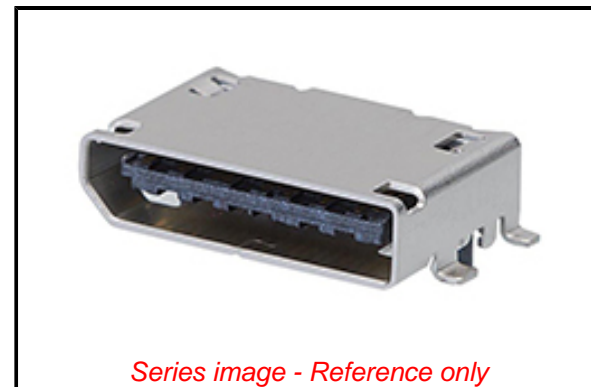

Series image - Reference only

Agency Certification

UL E29179

General

Product Family	I/O Connectors
Series	171982
Application	Wire-to-Board
Component Type	Receptacle
Overview	Nano-Pitch I/O™ Interconnect System
Product Name	Nano-Pitch I/O™
Type	N/A
UPC	889056188364

Physical

Circuits (Loaded)	42
Circuits (maximum)	42
Color - Resin	Black
Durability (mating cycles max)	50
Gender	Receptacle
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Tin over Nickel
Material - Resin	High Temperature Thermoplastic
Net Weight	1.070/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-40°C to +80°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No

Electrical

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
-ED/01/2017 (12
January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[171982 Series](#)

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

Material Info**Reference - Drawing Numbers**

Application Specification	AS-173162-0001, AS-173162-0002
Electrical Model Document	EE-171982-0010
Packaging Specification	PK-171982-9000, PK-173307-0001
Product Specification	PS-173162-0001-001, TS-171982-0001-001, TS-171982-0010-001
S-Parameter Model	SP-171982-0010
Sales Drawing	SD-171982-1000
Symbol/Footprint Data	SYM-171982-0142

This document was generated on 06/30/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION