

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0026624020](#)
Status: **Active**
Overview: [KK Interconnect Solutions](#)
Description: [KK 396 Header, Vertical, Friction Lock, 2 Circuits, Tin \(Sn\) Plating, with Circuit 2 Voided](#)

Documents:

[Drawing \(PDF\)](#) [Packaging Specification PK-41791-001-001 \(PDF\)](#)
[Product Specification PS-08-50-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General


Product Family PCB Headers
 Series [41791](#)
 Application Power, Wire-to-Board
 Overview [KK Interconnect Solutions](#)
 Product Name KK 396
 Taxonomy PCB Headers and Receptacles
 UPC 800754925433

Physical

Breakaway No
 Circuits (Loaded) 2
 Circuits (maximum) 2
 Color - Resin Natural
 Durability (mating cycles max) 25
 Flammability 94V-0
 Glow-Wire Capable No
 Lock to Mating Part Yes
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Polyester
 Net Weight 0.560/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 3.56mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 3.96mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to Mating Part Yes
 Polarized to PCB No
 Shrouded Partial
 Stackable Yes
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A
 Voltage - Maximum 250V

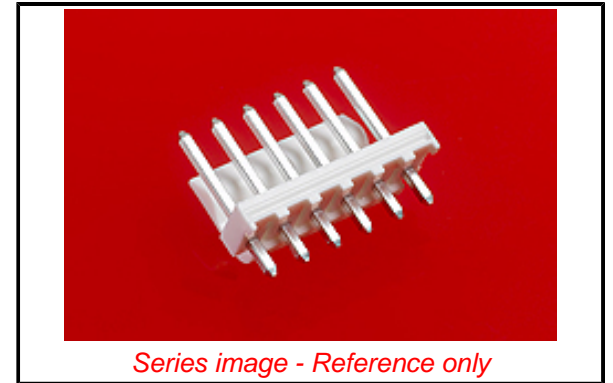

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2022)4187-DC (10
 June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[41791](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Solder Process Data

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 005 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 235 |

Material Info

| | |
|--------------------|------------|
| Engineering Number | 41791-0036 |
|--------------------|------------|

Reference - Drawing Numbers

| | |
|-------------------------|------------------------------|
| Packaging Specification | PK-41791-001-001 |
| Product Specification | PS-08-50-001 |
| Sales Drawing | SDA-41791-000, SDA-41791-002 |

This document was generated on 09/04/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION