


Quick-Change™ Plugs

Product Specifications

MECHANICAL MOLDED BODY MATERIAL: CONTACT MATERIAL: COUPLING NUT MATERIAL: CABLE TYPE(S): CABLE STRANDING: CABLE DIAMETERS:	NITRILE BRASS THERMOPLASTIC 10/12/14 AWG: YELLOW, 600V, RUBBER JACKETED 105° C, U.L. RECOGNIZED, CSA CERTIFIED	ELECTRICAL VOLTAGE RATING: CURRENT RATING: ISOLATION RESISTANCE: ENVIRONMENTAL PROTECTION: AMBIENT OPERATING TEMP: CERTIFICATIONS UL: CSA:	600VAC/600VDC SEE ORDERING CHART ≥1000MΩ IP 68, NEMA 6P -20° TO +105° C UL RECOGNIZED, FILE NO. E46237 CSA CERTIFIED, FILE NO. LR6837
	14 AWG: 41 X #30 12 AWG: 65 X #30 10 AWG: 105 X #30		14 AWG 12 AWG 10 AWG 2/C .52" .60" .65" 3/C .55" .62" .69" 4/C .59" .68" .74"

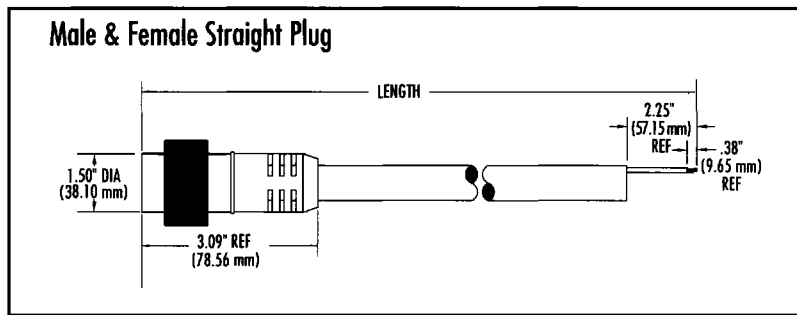

PLUGS WITH CABLE

POLES	FACE VIEW MALE	WIRING CODE	AWG CABLE SIZE	CURRENT RATING @ 600V	CABLE LENGTH ft/m	MALE	FEMALE		
2		1-BLACK 2-WHITE	#14	18A	3ft/.91m	32019	32022		
					6ft/1.83m	32020	32023		
					12ft/3.66m	32021	32024		
			#12	25A	3ft/.91m	32026	32029		
					6ft/1.83m	32027	32030		
					12ft/3.66m	32028	32031		
					#10	30A	3ft/.91m	32050	32053
							6ft/1.83m	32051	32054
							12ft/3.66m	32052	32055
3		1-BLACK 2-WHITE 3-GREEN	#14	18A	3ft/.91m	32319	32322		
					6ft/1.83m	32320	32323		
					12ft/3.66m	32321	32324		
			#12	25A	3ft/.91m	32353	32342		
					6ft/1.83m	32354	32350		
					12ft/3.66m	32355	32356		
					#10	30A	3ft/.91m	32404	32407
							6ft/1.83m	32405	32408
							12ft/3.66m	32406	32409
4		1-BLACK 2-GREEN 3-RED 4-WHITE	#14	15A	3ft/.91m	32634	32637		
					6ft/1.83m	32635	32638		
					12ft/3.66m	32636	32639		
			#12	20A	3ft/.91m	32650	32669		
					6ft/1.83m	32676	32678		
					12ft/3.66m	32677	32679		
					#10	25A	3ft/.91m	32754	32757
							6ft/1.83m	32755	32758
							12ft/3.66m	32756	32759

NEW PRODUCT OPTIONS Aluminum version, add "AL" as suffix e.g. 32017 becomes 32017AL