

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0347082029](#)
Status: **Active**
Overview: [Stac64 Single, Multi-Pocket and Hybrid Header System](#)
Description: [Stac64 2 Bay Right-Angle Headers, 24 Circuits, Bay A 12 Circuit Signal Header, Polarization A, Black; Bay B 12 Circuit Signal Header, Polarization B, Gray; Tray](#)

Documents:

[3D Model](#) [Brochure \(PDF\)](#)
[3D Model \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)


General

| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 34708 |
| Application | Automotive, Power, Wire-to-Board |
| Comments | Bay A 12 Circuits Stac64 Right Angle Signal Header, Polarization A. Bay B 12 Circuits Stac64 Right Angle Signal Header, Polarization B |
| Overview | Stac64 Single, Multi-Pocket and Hybrid Header System |
| Product Name | Stac64 |
| Taxonomy | PCB Headers and Receptacles |
| UPC | 884982897854 |

Physical

| | |
|--------------------------------|--------------------------------|
| Breakaway | No |
| Circuits (Loaded) | 24 |
| Circuits (maximum) | 24 |
| Color - Resin | Black, Gray |
| Durability (mating cycles max) | 10 |
| First Mate / Last Break | No |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 12.640/g |
| Number of Rows | 2 |
| Orientation | Right Angle |
| PC Tail Length | 3.36mm |
| PCB Locator | Yes |
| PCB Retention | None |
| PCB Thickness - Recommended | 1.57mm |
| Packaging Type | Tray |
| Pitch - Mating Interface | 2.54mm |
| Pitch - Termination Interface | 2.54mm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Yes |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40° to +100°C |
| Termination Interface: Style | Through Hole |

Electrical

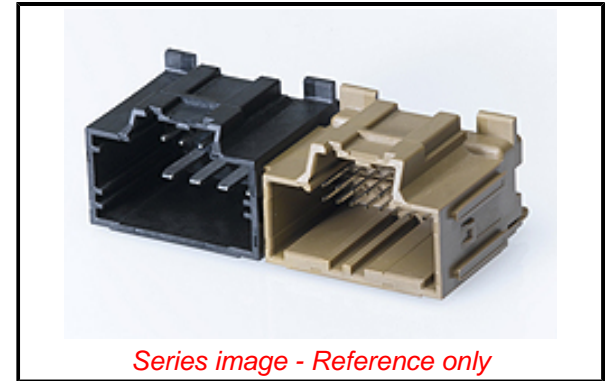

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Relevant

For more information, please visit [Contact US](#)

China ROHS

Not Relevant

ELV

Compliant

RoHS Phthalates

Not Contained

Search Parts in this Series

[34708](#) Series

Mates With

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptacle Assembly, [34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle

| | |
|-------------------------------|---------------|
| Current - Maximum per Contact | Contact Molex |
| Voltage - Maximum | 500V |

Solder Process Data

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 040 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 003 |
| Process Temperature max. C | 260 |

Material Info

This document was generated on 09/02/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION