

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0357201210](#)
Status: **Active**
Overview: Standard Quick-Disconnect Terminals
Description: 5.21mm Slip-On Receptacle Terminal, Quick Disconnect, 0.50mm Tab Thickness, Wire Range 16-20 AWG (1.31-0.52mm²), Post-Tin Plated

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-35703-001-001 \(PDF\)](#)

Agency Certification

CSA LR95446
 UL E92853

General

Product Family Quick Disconnects
 Series [35720](#)
 Crimp Quality Equipment Yes
 Insulated No
 Overview Standard Quick-Disconnect Terminals
 Product Name Slip-On
 Type Quick Disconnect
 UPC 800753199569

Physical

Barrel Type Open
 Gender Female
 Glow-Wire Compliant No
 Insulation None
 Lock to Mating Part Yes
 Material - Metal Brass
 Net Weight 0.520/g
 Orientation Straight
 Packaging Type Reel
 Polarized to Mating Part No
 Tab Thickness 0.51mm
 Tab Width 5.21mm
 Temperature Range - Operating -40°C to +105°C
 Wire Insulation Diameter 3.10mm max.
 Wire Size AWG 16, 18, 20
 Wire Size mm² 0.50-1.30


Electrical

Voltage - Maximum 250V

Material Info

Reference - Drawing Numbers

Product Specification PS-35703-001-001
 Sales Drawing SD-35720-12*0/13*0/1, SD-35720-120

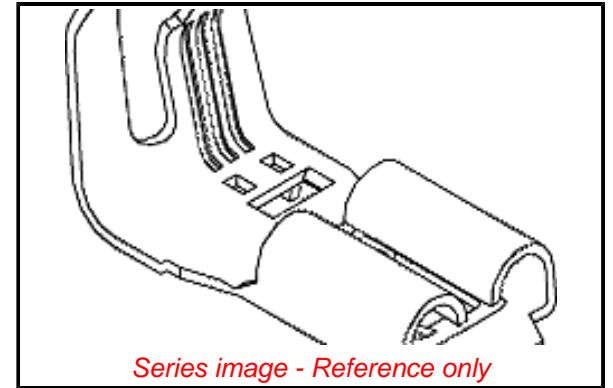

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/01/2017 (12
 January 2017)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[35720](#) Series

Use With

5.21mm Tab