

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0038007094](#)
Status: **Active**
Overview: [KK Interconnect Systems](#)
Description: [KK Header, Vertical, with Polarizing Backwall, 6 Circuits, Tin \(Sn\) Plating, Circuit 3 Voided](#)

Documents:

[Drawing \(PDF\)](#) [Symbol Footprint Data SYM-1008-5061-001 \(PDF\)](#)
[Product Specification PS-99020-0087-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification PK-2599-0001-000 \(PDF\)](#)

Agency Certification


UL E29179

General

Product Family [PCB Headers](#)
Series [2599](#)
Application [Signal, Wire-to-Board](#)
Overview [KK Interconnect Systems](#)
Product Name [KK 508](#)
Taxonomy [PCB Headers and Receptacles](#)
UPC [800753729254](#)

Physical

Breakaway No
Circuits (Loaded) 5
Circuits (maximum) 6
Color - Resin Natural
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-2
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 1.500/g
Number of Rows 1
Orientation Vertical
PC Tail Length 4.45mm
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.60mm
Packaging Type Bag
Pitch - Mating Interface 5.08mm
Pitch - Termination Interface 5.08mm
Plating min - Mating 5.080µm
Plating min - Termination 5.080µm
Polarized to Mating Part Yes
Polarized to PCB No
Shrouded Partial
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating See Product Specification

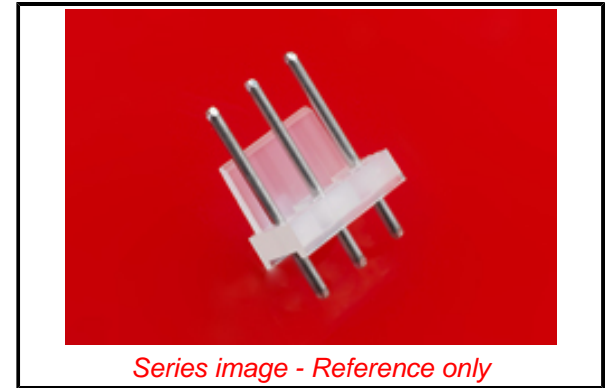

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[2599 Series](#)

Mates With

Crimp Housing [3001](#)
 PCB Receptacle [3002](#)

Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 4.5A
Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 005
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 235

Material Info

Engineering Number 2599M06A03

Reference - Drawing Numbers

Packaging Specification PK-2599-0001-000
Product Specification PS-99020-0087-001
Symbol/Footprint Data SYM-1008-5061-001

This document was generated on 10/12/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION