

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0039014030](#)
Status: **Active**
Overview: Mini-Fit Family Power Connectors
Description: Mini-Fit Jr. Receptacle Housing, Single Row, 3 Circuits, UL 94V-2, Natural

Documents:

| | |
|--|---|
| 3D Model (PDF) | Product Specification PS-5556-002-001 (PDF) |
| 3D Model | Application Specification 55560001-AS-000 (PDF) |
| Drawing (PDF) | Application Specification AS-5557-001-001 (PDF) |
| Product Specification 55560002-PS-CH-000 (PDF) | Packaging Specification PK-5557-002-000 (PDF) |
| Product Specification 55560002-PS-ES-000 (PDF) | Test Summary 55560010-TS-000 (PDF) |
| Product Specification 55560002-PS-SK-000 (PDF) | Test Summary 55570000-TS-000 (PDF) |
| Product Specification PS-45750-001-001 (PDF) | Test Summary TS-5556-002-001 (PDF) |
| Product Specification PS-5556-001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|--|
| Product Family | Crimp Housings |
| Series | 5557 |
| Application | Power, Wire-to-Board, Wire-to-Wire |
| Comments | Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current derating information.. Glow Wire Equivalent Part. |
| Overview | Mini-Fit Family Power Connectors |
| Product Name | Mini-Fit Jr. |
| Taxonomy | Connector Housings |
| UPC | 800753627956 |

Physical


| | |
|-------------------------------|----------------|
| Breakaway | No |
| Circuits (maximum) | 3 |
| Color - Resin | Natural |
| Flammability | 94V-2 |
| Gender | Receptacle |
| Glow-Wire Capable | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Resin | Nylon |
| Net Weight | 0.900/g |
| Number of Rows | 1 |
| Packaging Type | Bag |
| Panel Mount | No |
| Pitch - Mating Interface | 4.20mm |
| Pitch - Termination Interface | 4.20mm |
| Polarized to Mating Part | Yes |
| Stackable | No |
| Temperature Range - Operating | -40° to +105°C |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 13.0A |
|-------------------------------|-------|

Solder Process Data

| | |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

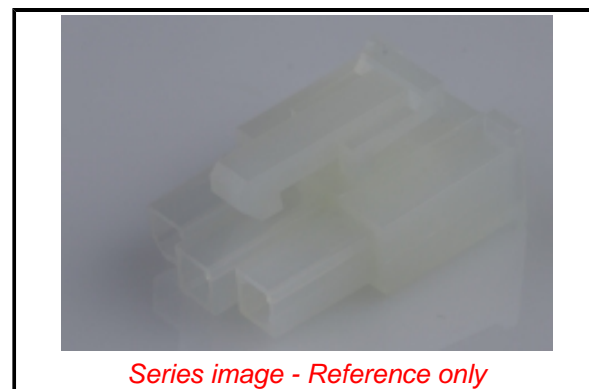

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

5557 Series

Mates With

[39014032](#) Panel Mount Plug, [39014036](#) Free Hanging Plug, [39301039](#) Vertical Header, [39302035](#) Vertical Header, [39302031](#) Vertical Header

Use With

Mini-Fit Female Crimp Terminals [5556](#)

Mini-Fit Plus HCS Crimp Terminal [45750](#)
Mini-Fit Pre-Crimped Leads [797580001](#) , [797580009](#)

Material Info

Engineering Number

5557-03R2

Reference - Drawing Numbers

Application Specification

55560001-AS-000, AS-5557-001-001

Packaging Specification

PK-5557-002-000

Product Specification

55560002-PS-CH-000, 55560002-PS-ES-000,

55560002-PS-SK-000, PS-45750-001-001,

PS-5556-001-001, PS-5556-002-001

Sales Drawing

55570302-SD-000

Test Summary

55560010-TS-000, 55570000-TS-000,

TS-5556-002-001

This document was generated on 08/31/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION