

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0428204233

Status:

Active

Overview:

Mini-Fit Sr. Power Connectors

Description:

10.00mm Pitch Mini-Fit Sr. Header, Single Row, Right-Angle, 3.18mm PCB Thickness, 0.76µm Gold (Au) Selective Plating, 4 Circuits

Documents:

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[3D Model](#)


[Product Specification PS-42815-001-001 \(PDF\)](#)

[Packaging Specification PK-42820-910-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	42820
Application	Power, Wire-to-Board
Overview	Mini-Fit Sr. Power Connectors
Product Name	Mini-Fit Sr.
Taxonomy	PCB Headers and Receptacles
UPC	800756515793

Physical	
Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	13.296/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	5.10mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	3.18mm
Packaging Type	Tube
Pitch - Mating Interface	10.00mm
Pitch - Termination Interface	10.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No

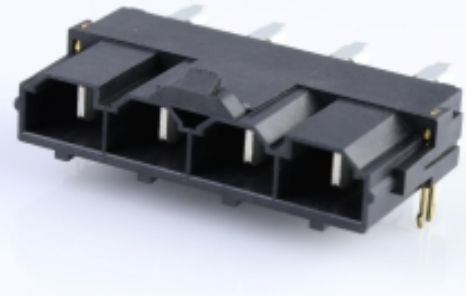

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

42820 Series

Mates With

Mini-Fit Sr. Receptacle Housing with TPA 42816 . Mini-Fit Sr. Cable Assembly 369240401 , 369240403 , 369240410

Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	50.0A
Voltage - Maximum	600V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-42820-910-001
Product Specification	PS-42815-001-001
Sales Drawing	SDA-42820-0002-001

This document was generated on 10/06/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION