

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0431600305](#)
Status: **Active**
Overview: [Sabre Power Connector](#)
Description: Sabre Vertical Header, 5 Circuits, Glow-Wire Capable, PCB Thickness 2.40mm, without Board Lock

Documents:

| | |
|--|--|
| Drawing (PDF) | Test Summary 444410000-TS-000 (PDF) |
| 3D Model | Datasheet (PDF) |
| 3D Model (PDF) | Symbol Footprint Data SYM-43160-0105-001 (PDF) |
| Product Specification PS-44441-9999-001 (PDF) | RoHS Certificate of Compliance (PDF) |
| Packaging Specification PK-43789-001-001 (PDF) | |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |


General

| | |
|----------------|---|
| Product Family | PCB Headers |
| Series | 43160 |
| Application | Power, Wire-to-Board |
| Comments | <p>*****Fully Polarized, high power wire to board and wire to wire connector system<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.*****</p> |

| | |
|--------------|---------------------------------------|
| Overview | Sabre Power Connector |
| Product Name | Sabre |
| Taxonomy | PCB Headers and Receptacles |
| UPC | 800753844087 |

Physical

| | |
|--------------------------------|-------|
| Breakaway | No |
| Circuits (Loaded) | 5 |
| Circuits (maximum) | 5 |
| Color - Resin | Black |
| Durability (mating cycles max) | 25 |
| First Mate / Last Break | No |
| Flammability | 94V-0 |
| Glow-Wire Capable | Yes |
| Guide to Mating Part | No |
| Keying to Mating Part | Yes |

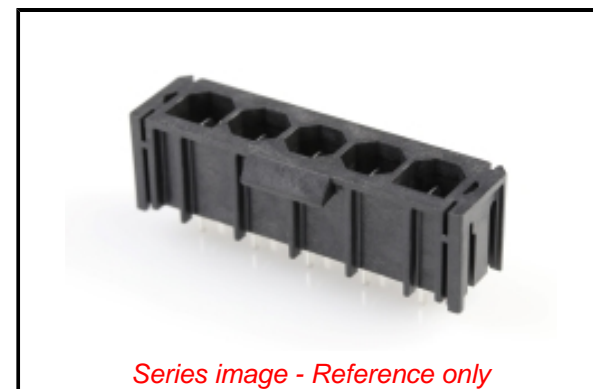

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2022)4187-DC (10 June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

| | |
|-----------------|---------------|
| China ROHS | Green Image |
| ELV | Not Relevant |
| RoHS Phthalates | Not Contained |

Search Parts in this Series

[43160 Series](#)

Mates With

[444412005 Sabre Receptacle Housing](#)

| | |
|--------------------------------|--------------------------------|
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 5.818/g |
| Number of Rows | 1 |
| Orientation | Vertical |
| PC Tail Length | 5.33mm |
| PCB Locator | Yes |
| PCB Retention | N/A |
| PCB Thickness - Recommended | 2.40mm |
| Packaging Type | Bag |
| Pitch - Mating Interface | 7.50mm |
| Pitch - Termination Interface | 7.50mm |
| Plating min - Mating | 0.889µm |
| Plating min - Termination | 0.889µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40° to +75°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 18.0A |
| Voltage - Maximum | 600V |

Solder Process Data

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 005 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 235 |

Material Info

Reference - Drawing Numbers

| | |
|-------------------------|--------------------|
| Packaging Specification | PK-43789-001-001 |
| Product Specification | PS-44441-9999-001 |
| Sales Drawing | 431600001-SD-000 |
| Symbol/Footprint Data | SYM-43160-0105-001 |
| Test Summary | 444410000-TS-000 |

This document was generated on 09/01/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION