

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0439151403**
Status: **Active**
Overview: Mini-Fit Sr. Power Connectors
Description: 10.00mm Pitch Mini-Fit Sr. Header, Dual Row, Vertical, 1.57mm PCB Thickness, Silver (Ag) Plating, 10 Circuits

Documents:

Drawing (PDF)	Product Specification PS-42815-001-001 (PDF)
3D Model	Test Summary TS-42815-004-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	<u>43915</u>
Application	Power, Wire-to-Board
Overview	<u>Mini-Fit Sr. Power Connectors</u>
Product Name	Mini-Fit Sr.
Taxonomy	PCB Headers and Receptacles
UPC	889056247405

Physical

Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Silver
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	22.172/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.50mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	10.00mm
Pitch - Termination Interface	10.00mm
Plating min - Mating	2.540µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No

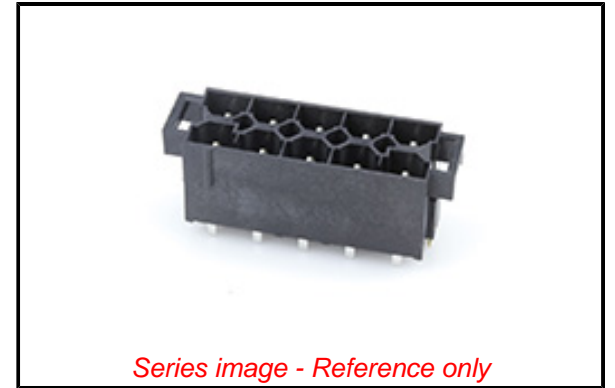

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[43915 Series](#)

Mates With

Mini-Fit Sr. Receptacle Housing [43914](#)

Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 50.0A
Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 030
Lead-freeProcess Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 235

Material Info

Reference - Drawing Numbers

Product Specification PS-42815-001-001
Sales Drawing SD-43915-001-001, SD-43915-002-001
Test Summary TS-42815-004-001

This document was generated on 09/26/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION