

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0445600004

Status:


Active

Overview:

Magnetic and Modular Jacks/Plugs

Description:

Modular Jack, Right-Angle, Low Profile, 8/8, 4 Ports

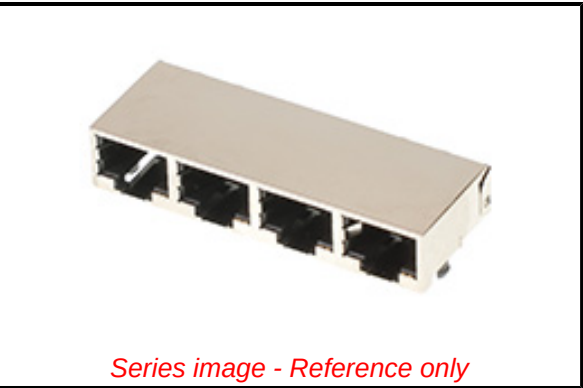

Documents:	
3D Model (PDF)	Packaging Specification PK-44560-005-001 (PDF)
Drawing (PDF)	Test Summary TS-44560-003-001 (PDF)
3D Model	RoHS Certificate of Compliance (PDF)
Product Specification PS-44560-003-001 (PDF)	

Agency Certification	
CSA	LR19980
UL	E107635
General	
Product Family	Modular Jacks/Plugs
Series	44560
Component Type	PCB Jack
Magnetic	No
Overview	Magnetic and Modular Jacks/Plugs
Performance Category	5, 5e
Power over Ethernet (PoE)	N/A
Product Name	Modular Jack 8/8, RJ45
Taxonomy	Modular Jacks and Plugs
UPC	756054374399
Physical	
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Inverted / Top Latch	No
Jack Height	11.23mm
Lightpipes/LEDs	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	12.715/g
Orientation	Right Angle (Side Entry)
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	1.02mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	1.270µm
Plating min - Termination	2.540µm
Port Configuration	1x4
Positions / Loaded Contacts	8/8
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole
Wire/Cable Type	N/A
Electrical	
Current - Maximum per Contact	1.5A
Grounding to Panel	None

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

44560 Series

Mates With

FCC 68 Plugs

Shielded	Yes
Voltage - Maximum	150V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-44560-005-001
Product Specification	PS-44560-003-001
Sales Drawing	RSD-44560-001-001, SD-44560-001-001
Test Summary	TS-44560-003-001

This document was generated on 08/27/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION