

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0447691402

Status:


Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit BMI Receptacle Header, Dual Row, Vertical, with Press-fit Plastic Pegs, 0.38µm Gold (Au) Selective, 14 Circuits

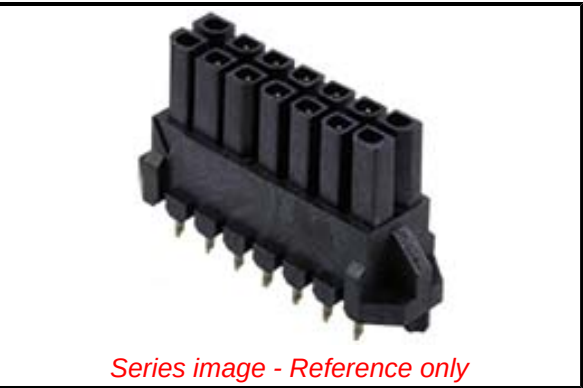

Series image - Reference only

Documents:

- Drawing (PDF)

3D Model

3D Model (PDF)

Product Specification PS-44300-001-001 (PDF)

Packaging Specification PK-44769-001-001 (PDF)
- Test Summary 443000002-TS-000 (PDF)

Datasheet (PDF)

Symbol Footprint Data SYM-44769-1401-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Receptacles
Series	44769
Application	Board-to-Board, Power, Wire-to-Board
Overview	Micro-Fit Connector System
Product Name	Micro-Fit BMI
Taxonomy	PCB Headers and Receptacles
UPC	800756568218

Physical

Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	No
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	2.597/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.40mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	250V

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

44769 Series

Mates With

44428 Micro-Fit BMI Right Angle Headers,
44432 Micro-Fit BMI Vertical Headers,
44300 Micro-Fit BMI Plug Housing, 45280
Micro-Fit BMI CPI Compliant Pin Header

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-44769-001-001
Product Specification	PS-44300-001-001
Sales Drawing	SD-44769-001-001
Symbol/Footprint Data	SYM-44769-1401-001
Test Summary	443000002-TS-000

This document was generated on 09/15/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION