

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

5019530327

Status:

Active

Overview:

Pico-Clasp Wire-to-Board Connectors

Description:

1.00mm Pitch, Pico-Clasp PCB Header, Single Row, Right-Angle, Surface Mount, 0.10µm Gold Plated, Outer Positive Lock, 3 Circuits, Red

Documents:

Drawing (PDF)

Product Specification 5019391000-PS-CHI-001 (PDF)

Product Specification 5019391000-PS-JAP-001 (PDF)

Product Specification 5019401001-PS-001 (PDF)

Product Specification PS-501940-001-001 (PDF)


Application Specification 5013300000-AS-000 (PDF)

Packaging Specification SPK-501953-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	PCB Headers
Series	501953
Application	Signal, Wire-to-Board
Overview	Pico-Clasp Wire-to-Board Connectors
Product Name	Pico-Clasp
Taxonomy	PCB Headers and Receptacles
UPC	800756912271
Physical	
Breakaway	No
Circuits (Loaded)	3
Circuits (maximum)	3
Color - Resin	Red
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	4.75mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	Nylon
Net Weight	111.040/mg
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.00mm
Plating min - Mating	0.102µm
Plating min - Termination	0.051µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

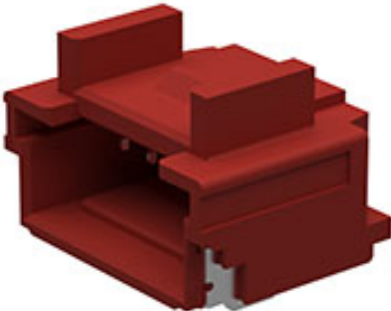

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

501953 Series

Mates With

Pico-Clasp Female Housing 501939

Current - Maximum per Contact	1.5A
Voltage - Maximum	100V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	5013300000-AS-000
Packaging Specification	SPK-501953-002-001
Product Specification	5019391000-PS-CHI-001, 5019391000-PS-JAP-001, 5019401001-PS-001, PS-501940-001-001
Sales Drawing	SD-501953-001-001, SD-501953-001-002, SD-501953-002-001, SD-501953-002-002, SD-501953-002-003

This document was generated on 09/29/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION