


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **5024303010**  
**Status:** **Active**  
**Overview:** SlimStack™ 0.40mm Pitch Board-to-Board Connectors  
**Description:** 0.40mm Pitch SlimStack™ Board-to-Board, Plug, Surface Mount, Dual Row, Vertical Stacking, 1.00mm Stacking Height, with Solder Tabs, 30 Circuits

**Documents:**

|   |  |
|---|--|
| <a href="#">3D Model</a>                                      | <a href="#">Product Specification PS-502426-003-001 (PDF)</a>    |
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Packaging Specification SPK-502430-001-001 (PDF)</a> |
| <a href="#">Product Specification PS-502426-001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |
| <a href="#">Product Specification PS-502426-002-001 (PDF)</a> |  |

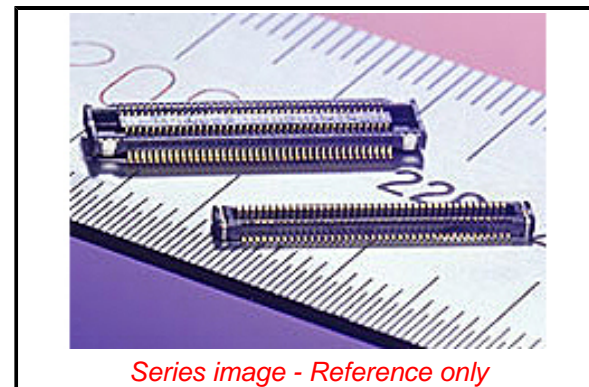

**General**

|                |   |
|----------------|---|
| Product Family | PCB Headers                                       |
| Series         | 502430  |
| Application    | Board-to-Board, Signal                            |
| Overview       | SlimStack™ 0.40mm Pitch Board-to-Board Connectors |
| Product Name   | SlimStack™  |
| UPC            | 883906691059                                      |

**Physical**

|                                |                       |
|--------------------------------|-----------------------|
| Breakaway                      | No                    |
| Circuits (Loaded)              | 30                    |
| Circuits (maximum)             | 30                    |
| Color - Resin                  | Black                 |
| Durability (mating cycles max) | 30                    |
| Glow-Wire Compliant            | No                    |
| Mated Height                   | 1.00mm                |
| Material - Metal               | Phosphor Bronze       |
| Material - Plating Mating      | Gold                  |
| Material - Plating Termination | Gold                  |
| Net Weight                     | 15.870/mg             |
| Number of Rows                 | 2                     |
| Orientation                    | Vertical              |
| PCB Locator                    | No                    |
| PCB Retention                  | Yes                   |
| Packaging Type                 | Embossed Tape on Reel |
| Pitch - Mating Interface       | 0.40mm                |
| Polarized to Mating Part       | No                    |
| Polarized to PCB               | No                    |
| Stackable                      | No                    |
| Temperature Range - Operating  | -20°C to +85°C        |
| Termination Interface: Style   | Surface Mount         |

**Electrical**

|                               |                 |
|-------------------------------|-----------------|
| Current - Maximum per Contact | 0.3A            |
| Voltage - Maximum             | 50V AC (RMS)/DC |

**Material Info**

**Reference - Drawing Numbers**

|                         |   |
|-------------------------|---|
| Packaging Specification | SPK-502430-001-001                                      |
| Product Specification   | PS-502426-001-001, PS-502426-002-001, PS-502426-003-001 |
| Sales Drawing           | SD-502430-001, SD-502430-002                            |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
-ED/01/2017 (12  
January 2017)

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

|                 |               |
|-----------------|---------------|
| China ROHS      | Green Image   |
| ELV             | Not Relevant  |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**

[502430](#) Series

**Mates With**

[502426](#) PCB Receptacle

This document was generated on 07/18/2017

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**