

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0522072685

Status:

Active

Overview:


FFC-FPC (SMT)

Description:

Easy-On FFC/FPC Connector, 1.00mm Pitch, Slider Series, Right-Angle, Top Contact, 2.70mm Height, 26 Circuits, Tin-Bismuth Plating

Replacement Part Number :

http://www.molex.com/molex/search/partSearch?pQuery=&sType=p&query=0522072633522072633 w/differences

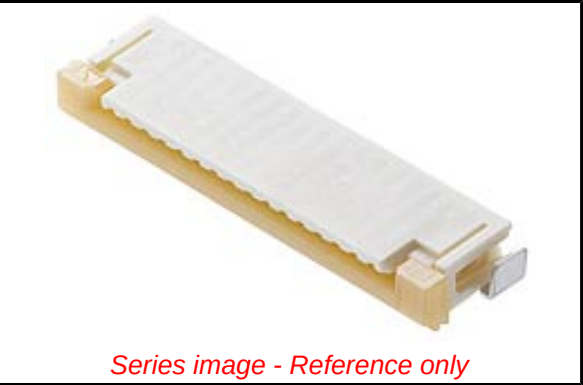

Series image - Reference only

Documents:

- Drawing (PDF)

Product Specification PS-52207-047-001 (PDF)

Packaging Specification SPK-52207-002-001 (PDF)

Datasheet (PDF)
- Product Guide (PDF)

RoHS Certificate of Compliance (PDF)

Reference Guide (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	FFC/FPC Connectors
Series	52207
Comments	Replacement has plating difference
Overview	FFC-FPC (SMT)
Product Name	Easy-On
Replacement Part Number	522072633 w/differences
Series Name	Slider
UPC	822348118274

Physical

Actuator Type	Slider
Circuits (Loaded)	26
Color - Resin	Natural
Contact Position	Top
Durability (mating cycles max)	30
Flammability	94V-0
Mated Height	2.70mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Material - Resin	Nylon
Net Weight	902.200/mg
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.00mm
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.00mm
Pitch - Termination Interface	1.00mm
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-30° to +85°C
Wire/Cable Type	FFC/FPC

Electrical

Current - Maximum per Contact	1.0A
-------------------------------	------

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

52207 Series

Mates With

Premo-Flex FFC Cable [15167](#) , [98267](#) , [15267](#)

Voltage - Maximum

125V

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52207-002-001

Product Specification

PS-52207-047-001

Sales Drawing

SD-52207-060-001, SD-52207-061-001

This document was generated on 10/07/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION