

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705450043

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row 3.05mm Pocket Vertical, Shrouded, with Press-fit Plastic Peg, 9 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

- Documents:
- 3D Model

Product Specification PS-70541-001 (PDF)
- Drawing (PDF)

Packaging Specification PK-70873-0014-001 (PDF)
- 3D Model (PDF)


Test Summary TS-70541-100-001 (PDF)
- Product Specification PS-70400-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	70545
Application	Signal, Wire-to-Board
Overview	SL Modular Connectors
Product Name	SL
Taxonomy	PCB Headers and Receptacles
UPC	800753597709

Physical	
Breakaway	No
Circuits (Loaded)	9
Circuits (maximum)	9
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.699/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.30mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

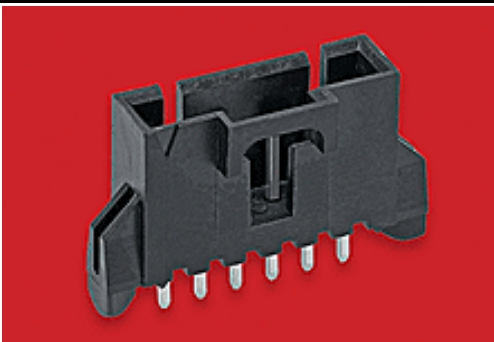

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

70545 Series

Mates With

SL Crimp Housing [70066](#) Option N, [70066](#) Option G, [70066](#) Option A, [70430](#) Option G, [70400](#) Option G

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	003
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260
Material Info	
Engineering Number	A-70545-0043
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0014-001
Product Specification	PS-70400-001, PS-70541-001
Sales Drawing	SDA-70545-XXXX-001, SDA-70545-XXXX-002, SDA-70545-XXXX-003
Test Summary	TS-70541-100-001

This document was generated on 08/31/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION