

MATERIALS AND FINISHES

BODY: ZINC (ZAMAK 3)
PLATED ELECTROLESS NICKEL


CONTACT: BERYLLIUM COPPER
PLATED GOLD

INSULATOR: TEFLON

GROUND PINS: BRASS
PLATED TIN

ELECTRICAL DATA:

VSWR 1.08 MAX TO 6 GHz
INSERTION LOSS 0.24 dB MAX TO 6 GHz

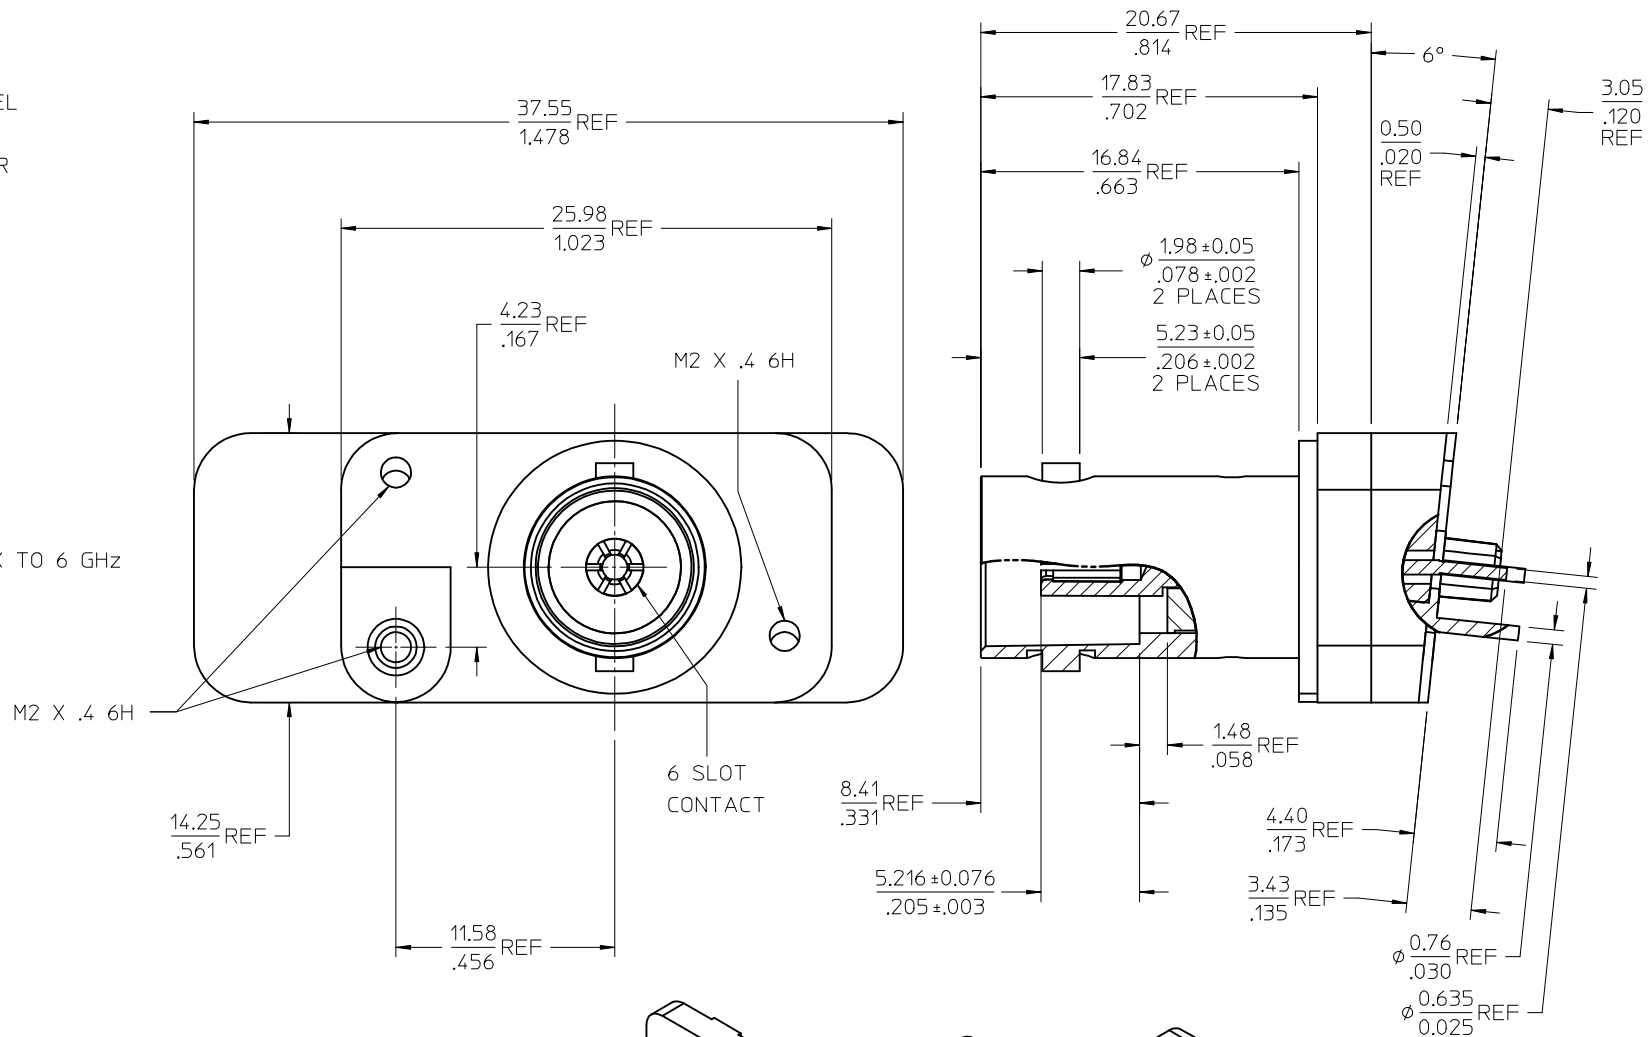

PART # 73171-3330

MIL C-39012 OR IEC 169-8	FEMALE BNC INTERFACE
SPECIFICATION	DESCRIPTION

CHG: ADDED LUG
LOCATIONS.

EC NO: URF2013-0437
DRAWN: ROBERTSON 2013/01/25
CHKD: SSS 2013/01/25
APPR: JWIENER 2013/01/28

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0002
3 PLACES	± .005	± .0002
2 PLACES	± .005	± .0002
1 PLACE	± .005	± .0002

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY	DATE
AZR	2007/12/11
CHECKED BY	DATE
SSS	2007/12/11
APPROVED BY	DATE
JDW	2007/12/11

MATERIAL NO.
731713330

SIZE
C

SCALE
METRIC

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
BNC JACK SPECIAL
AIR DIELECTRIC 50 OHM
BNC-J/PCB, EWR-3483
MOLEX INCORPORATED

DOCUMENT NO.

SD-73171-333

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION