

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0026584022

Status:

Active

Overview:

[KK Interconnect Solutions](#)

Description:

KK 396 Breakaway Header, Vertical, 2 Circuits, Tin (Sn) Plating, Pin length 30.48mm (1.200")

Documents:

- [Drawing \(PDF\)](#)
- [Product Specification PS-08-50-001 \(PDF\)](#)
- [Packaging Specification PK-41661-001-001 \(PDF\)](#)
- [Symbol Footprint Data SYM-26-48-1021-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

Application tooling part link

Application Tooling Part Link

11-20-0901

General

Product Family

Series

Application

Overview

Product Name

Taxonomy

UPC

PCB Headers

[41661](#)

Board-to-Board, Signal, Wire-to-Board

[KK Interconnect Solutions](#)

KK 396

PCB Headers and Receptacles

800754395069

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Capable

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Yes

2

2

Black

25

No

94V-0

No

No

None

None

Brass

Tin

Tin

Polyester

0.825/g

1

Vertical

4.62mm

No

None

1.60mm

Bag

3.96mm


3.96mm

No

No

No

Yes

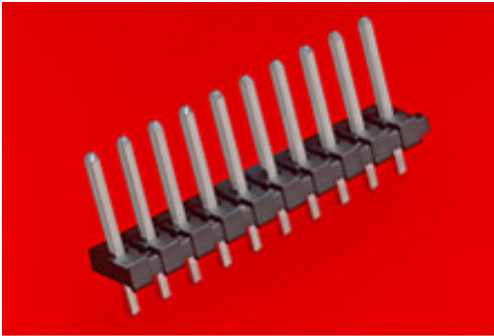

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[41661](#) Series

Mates With

[2139](#) KK Crimp Housing, [41695](#) KK Crimp Housing, [6442](#) KK Crimp Housing, [2145](#) PCB Connector, [41815](#) PCB Connector, [3069](#) KK Crimp Housing

Surface Mount Compatible (SMC)	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	4.5A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235
Material Info	
Engineering Number	A-41661-A02M197
Reference - Drawing Numbers	
Packaging Specification	PK-41661-001-001
Product Specification	PS-08-50-001
Sales Drawing	SD-41661-001-001, SD-41661-001-002
Symbol/Footprint Data	SYM-26-48-1021-001

This document was generated on 09/03/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION