

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [075757201](#)

**Status:** **Active**

**Overview:** [MX150 Sealed and Unsealed Connector System](#)

**Description:** MX150 Dual Row Header, Vertical, 20 Circuits, 1.25µm Nickel (Ni) Overall, 2.50µm Minimum Select Matte Tin (Sn) Plating on Tail, 0.05µm Minimum Select Gold (Au) Contact Area, 16.09mm Mating Pin Length, 3.05m

**Documents:**

[3D Model](#)

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[Product Specification PS-75757-000-001 \(PDF\)](#)

[Packaging Specification PK-36518-340-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**General**


Product Family	PCB Headers
Series	<a href="#">75757</a>
Application	Power, Wire-to-Board
Overview	<a href="#">MX150 Sealed and Unsealed Connector System</a>
Product Name	MX150
Taxonomy	PCB Headers and Receptacles
UPC	800756810782

**Physical**

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.173/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.05mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tube
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	0.051µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	17.0A
-------------------------------	-------

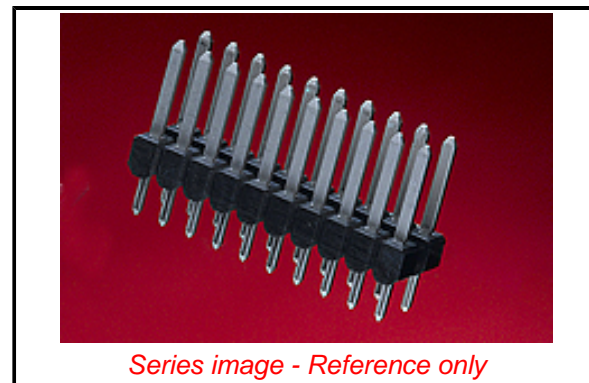

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[75757](#) Series

**Mates With**

[33472](#) Dual Row MX150 Receptacles

Voltage - Maximum 500V DC

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 005  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 245

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification PK-36518-340-001  
Product Specification PS-75757-000-001  
Sales Drawing SD-75757-002-001, SD-75757-003-001,  
SD-75757-010-001

This document was generated on 09/26/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**