

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0763527001](#)  
**Status:** **Active**  
**Overview:** [SFP+ and SFP Interconnect Solutions](#)  
**Description:** Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-8 Multi-Port Connector with Inner Ports and Outer Lite Pipe Ports, with Improved EMI Metal Gasket, 320 Circuits, Tin (Sn) Tails

|                                                              |                                                                  |
|--------------------------------------------------------------|------------------------------------------------------------------|
| <b>Documents:</b>                                            |                                                                  |
| <a href="#">3D Model</a>                                     | <a href="#">Application Specification AS-75310-001-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                | <a href="#">Application Specification AS-76090-001-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                               | <a href="#">Packaging Specification PK-76352-001-001 (PDF)</a>   |
| <a href="#">Product Specification PS-75310-001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>             |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                  |                                                     |
|------------------|-----------------------------------------------------|
| Product Family   | I/O Connectors                                      |
| Series           | <a href="#">76352</a>                               |
| Application      | Module-to-Board                                     |
| Component Type   | Receptacle                                          |
| Electrical Model | Yes                                                 |
| Overview         | <a href="#">SFP+ and SFP Interconnect Solutions</a> |
| Product Name     | SFP Plus                                            |
| Taxonomy         | High-Speed Pluggable Connector                      |
| Type             | N/A                                                 |
| UPC              | 884982411821                                        |

**Physical**

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| Boot Color                     | N/A                                           |
| Circuits (Loaded)              | 320                                           |
| Circuits (maximum)             | 320                                           |
| Circuits Detail                | 320                                           |
| Durability (mating cycles max) | 100                                           |
| Flammability                   | 94V-0                                         |
| Gender                         | Female                                        |
| Keying to Mating Part          | None                                          |
| Lock to Mating Part            | Yes                                           |
| Material - Metal               | Brass, Phosphor Bronze                        |
| Material - Plating Mating      | Gold                                          |
| Material - Plating Termination | Tin                                           |
| Material - Resin               | High Temperature Thermoplastic, Polycarbonate |
| Net Weight                     | 185.128/g                                     |
| Number of Rows                 | 2                                             |
| Orientation                    | Right Angle                                   |
| PC Tail Length                 | 2.07mm                                        |
| PCB Locator                    | Yes                                           |
| PCB Retention                  | Yes                                           |
| PCB Thickness - Recommended    | 1.57mm                                        |
| Packaging Type                 | Tray                                          |
| Panel Mount                    | No                                            |
| Pitch - Mating Interface       | 0.80mm                                        |
| Pitch - Termination Interface  | 0.80mm                                        |
| Plating min - Mating           | 0.762µm                                       |
| Plating min - Termination      | 0.762µm                                       |
| Polarized to Mating Part       | Yes                                           |

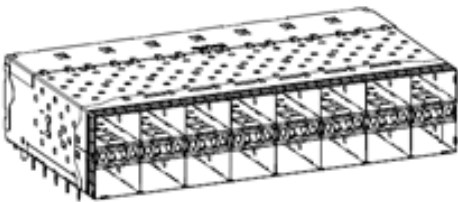

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

|                 |               |
|-----------------|---------------|
| China ROHS      | Green Image   |
| ELV             | Not Relevant  |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**

[76352](#) Series

|                                    |                                    |
|------------------------------------|------------------------------------|
| Polarized to PCB                   | Yes                                |
| Ports                              | 16                                 |
| Surface Mount Compatible (SMC)     | No                                 |
| Temperature Range - Operating      | -40° to +85°C                      |
| Termination Interface: Style       | Through Hole - Compliant Pin       |
| Waterproof / Dustproof             | No                                 |
| <b>Electrical</b>                  |                                    |
| Current - Maximum per Contact      | 0.5A                               |
| Grounding to Panel                 | None                               |
| Shield Type                        | EMI Gasket                         |
| Shielded                           | Yes                                |
| Voltage - Maximum                  | 120V AC (RMS)/DC                   |
| <b>Solder Process Data</b>         |                                    |
| Lead-freeProcess Capability        | N/A                                |
| <b>Material Info</b>               |                                    |
| <b>Reference - Drawing Numbers</b> |                                    |
| Application Specification          | AS-75310-001-001, AS-76090-001-001 |
| Electrical Model Document          | EE-76090-001-001                   |
| Packaging Specification            | PK-76352-001-001                   |
| Product Specification              | PS-75310-001-001                   |
| S-Parameter Model                  | SP-76090-001-001                   |
| Sales Drawing                      | SD-76352-0002-001                  |

This document was generated on 09/29/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**